

California Board of Forestry and Fire Protection

NOTICE OF PROPOSED RULEMAKING

“ROAD RULES, 2013”

[Published August 23, 2013]

Title 14 of the California Code of Regulations (14 CCR),

Division 1.5, Chapter 4, Subchapters 1, 4, 5, 6, Articles 4, 5, 6, 8, and 12;

Subchapter 7, Articles 2, 6.5, 6.8, 6.9, and 7

Amend:

| | |
|-------------------------------|---|
| § 895.1 | Definitions |
| § 914.7 [934.7, 954.7] | Timber Operations, Winter Period |
| § 914.8 [934.8, 954.8] | Tractor Road Watercourse Crossing |
| § 915.1 [934.8, 954.8] | Use of Heavy Equipment for Site Preparation |
| § 916.3 [936.3, 956.3] | General Limitations Near Watercourses, Lakes, Marshes, Meadows and Other Wet Areas |
| § 916.4 [936.4, 956.4] | Watercourse and Lake Protection |
| § 916.9 [936.9, 956.9] | Protection and Restoration of the Beneficial Functions of the Riparian Zone in Watersheds with Listed Anadromous Salmonids |
| § 918.3 [938.3, 958.3] | Roads to be Kept Passable |
| § 923 [943, 963] | Logging Roads and Landings |
| § 923.1 [943.1, 963.1] | Planning for Roads and Landings |
| §923.2 [943.2, 963.2] | Road Construction |
| § 923.3 [943.3, 963.3] | Watercourse Crossings |
| § 923.4 [943.4, 963.4] | Road Maintenance |
| § 923.5 [943.5, 963.5] | Landing Construction |
| § 923.6 [943.6, 963.6] | Conduct of Operations on Roads and Landings |
| § 923.7 [943.7, 963.7] | Licensed Timber Operator Responsibility for Roads and Landings |
| § 923.8 [943.8, 963.8] | Planned Abandonment of Roads, Watercourse Crossings, and Landings |
| § 923.9 [943.9, 963.9] | Roads and Landings in Watersheds with Listed Anadromous Salmonids |
| § 1034 | Contents of Plan |
| § 1051.1 | Contents of Modified THP |
| § 1090.5 | Contents of NTMP |
| § 1090.7 | Notice of Timber Operations Content |
| § 1092.09 | PTHP Contents |
| § 1093.2 | Contents of Road Management Plan |
| § 1104.1 | Conversion Exemptions |

Repeal:

§ 918.3 [938.3, 958.3].

§ 923.9.1 [943.9.1]

Roads to be Kept Passable

**Measures for Roads and Landings in Watersheds
with Coho Salmon**

Adopt:

**Technical Rule Addendum Number 5 – “Guidance on Hydrologic
Disconnection, Road Drainage, Minimization of Diversion Potential, and
High Risk Crossings.”**

The California State Board of Forestry and Fire Protection (Board) is promulgating a regulation to amend existing Forest Practice Rules and adopt a Technical Rule Addendum. This comprehensive rulemaking proposal is intended to satisfy two long-term objectives of benefit to the regulated public, regulatory agencies, the general public, and the natural resources of the State. The first of these objectives is to ensure that all road-related Forest Practice Rules are adequate to prevent adverse impacts to beneficial uses of water. The second objective is to organize all road-related Forest Practice Rules into a logical, consistent order and locate them in one portion of the Forest Practice Rulebook for ease of reference and understanding by all.

PUBLIC HEARING

The Board will hold a public hearing on Wednesday, October 9, 2013, at its regularly scheduled meeting beginning at 8:00 a.m., at the Resources Building Auditorium, 1st Floor, 1416 Ninth Street, Sacramento, California. At the hearing, any person may present statements or arguments, orally or in writing, relevant to the proposed action described in the *Informative Digest*. The Board requests, but does not require, that persons who make oral comments at the hearing also submit a summary of their statements. Additionally, pursuant to Government Code § 11125.1, any information presented to the Board during the open hearing in connection with a matter subject to discussion or consideration becomes part of the public record. Such information shall be retained by the Board and shall be made available upon request.

WRITTEN COMMENT PERIOD

Any person, or authorized representative, may submit written comments relevant to the proposed regulatory action to the Board. The written comment period ends at 5:00 P.M., on Monday, October 7, 2013. The Board will consider only written comments received at the Board office by that time (in addition to those written comments received at the public hearing). The Board requests, but does not require, that persons who submit written comments to the Board reference the title of the rulemaking proposal in their comments to facilitate review.

Written comments shall be submitted to the following address:

Board of Forestry and Fire Protection
Attn: Eric Huff
Regulations Coordinator
P.O. Box 944246
Sacramento, CA 94244-2460

Written comments can also be hand delivered to the contact person listed in this notice at the following address:

Board of Forestry and Fire Protection
Room 1506-14
1416 9th Street
Sacramento, CA

Written comments may also be sent to the Board via facsimile at the following phone number:

(916) 653-0989

Written comments may also be delivered via e-mail at the following address:

board.public.comments@fire.ca.gov

AUTHORITY AND REFERENCE

Authority cited: Sections 4551, 4551.5, 4553, 4554.5, 4562.5, 4562.7, 4562.9, 4581, 4582, 4582.75, 4593, 4621, 21082 Public Resources Code. Reference: Sections 4551, 4551.5, 4553, 4554.5, 4562.5, 4562.7, 4562.9, 4581, 4582, 4582.75, 4593, 4621, 21080.5 Public Resources Code.

INFORMATIVE DIGEST/POLICY STATEMENT OVERVIEW

The Board is authorized under Public Resources Code Sections 4551, *et. seq.* to adopt regulations, "...to assure the continuous growing and harvesting of commercial forest tree species and to protect the soil, air, fish and wildlife, and water resources, including, but not limited to, streams, lakes, and estuaries." The Board is proposing a regulation to revise and improve upon existing protections of the aforementioned resources, most notably water resources, from the potentially adverse impacts associated with roads, landings, and watercourse crossings. In addition, the regulation is intended to reorganize all Forest Practice Rule sections associated with roads, landings, and watercourse crossings into a more coherent and useful format and location for the benefit of the regulated and regulator alike. Lastly, the rule proposal includes a new "Board Technical Rule Addendum Number 5 - Guidance on Hydrologic Disconnection, Road Drainage, Minimization of Diversion Potential, and High Risk Crossings."

The purpose of this new element in the rule proposal is to provide guidance to the regulated and regulator alike toward compliance with the proposed rule amendments.

SPECIFIC BENEFITS ANTICIPATED BY THE PROPOSED ADOPTION, AMENDMENT, OR REPEAL OF THE REGULATION

The most significant benefit anticipated from the adoption of the regulation is increased or improved hydrologic disconnection of road networks and watercourse crossings from associated watercourses.

The current Forest Practice Rules contain a definition for “hydrologic disconnection,” however application of this term for practical purposes has been lacking for some time. It is anticipated that this rule proposal could result in improvement of watercourse conditions relative to existing and newly constructed roads and watercourses. However, the level of positive effect may be somewhat difficult to discern. The existing Forest Practice Rules are comprehensive in their application to resource protection and enhancement. This could mean that the beneficial environmental effects of the proposed regulatory amendments would not be terribly obvious in the short term. Monitoring and maintenance of logging road networks and crossings as specified in the proposed rule amendments and otherwise are expected to yield useful affirmation of the effects of the rule proposal over the long-term.

The proposed regulation is not expected to have an effect upon public health and safety, worker safety, the prevention of discrimination, or the promotion of fairness or social equity. Neither is the proposed regulation expected to result in an increase in the openness and transparency in business and government.

IS THE PROPOSED REGULATION INCONSISTENT OR INCOMPATIBLE WITH EXISTING STATE REGULATIONS

The Board and Department of Forestry and Fire Protection have considered the consistency and compatibility of the rule proposal with existing state regulations. The proposed rulemaking is intended to modify existing Forest Practice Rule requirements related to logging roads, landings, and watercourse crossings previously adopted by the Board and implemented by the Department. Adoption and implementation of the State’s Forest Practice Rules is solely the responsibility of the Board and Department, respectively. The two agencies therefore conclude the proposed rulemaking is entirely consistent and compatible with existing state regulations.

DISCLOSURES REGARDING THE PROPOSED ACTION AND RESULTS OF THE ECONOMIC IMPACT ANALYSIS

The results of the economic impact assessment prepared pursuant to GC § 11346.5(a)(10) for this proposed regulation indicate that it will not result in an adverse economic impact upon the regulated public or regulatory agencies.

Adoption of these regulations will not: (1) create or eliminate jobs within California; (2) create new businesses or eliminate existing businesses within California; or (3) affect the expansion of businesses currently doing business within California.

The Board has made an initial determination that there will be no significant statewide adverse economic impact directly affecting business, including the ability of California businesses to compete with businesses in other states.

While it is anticipated the proposed regulation could benefit the environment, it is not expected to affect the health and welfare of California residents, improve worker safety, prevent discrimination, promote fairness or social equity, or result in an increase in the openness and transparency in business and government.

Cost impacts on representative private persons or businesses:

The Board, during the noticing period, will continue to evaluate the cost impacts that a representative private person or business would necessarily incur in reasonable compliance with the proposed action.

The cost of timber harvest planning and operational mitigations may be significantly affected by the proposed regulation.

Effect on small business:

The proposed regulations may affect small businesses. Incremental increases in planning and operating costs could result from the proposed action.

Mandate on local agencies and school districts:

The proposed regulation does not impose a mandate on local agencies and school districts.

Costs or savings to any State agency:

Costs or savings to state timber review agencies are not anticipated.

Cost to any local agency or school district which must be reimbursed in accordance with the applicable Government Code (GC) sections commencing with GC § 17500:

The proposed regulation does not impose a reimbursable cost to any local agency or school district.

Other non-discretionary cost or savings imposed upon local agencies:

The proposed regulation will not result in the imposition of non-discretionary costs or savings to local agencies.

Cost or savings in federal funding to the State:

The proposed regulation will not result in costs or savings in federal funding to the State.

Significant effect on housing costs:

The proposed regulation will not significantly affect housing costs.

Conflicts with or duplication of Federal regulations:

The proposed regulations neither conflict with, nor duplicate Federal regulations. There are no comparable Federal regulations for timber harvesting on State or private lands.

BUSINESS REPORTING REQUIREMENT

The regulation does not require a report, which shall apply to businesses.

CONSIDERATION OF ALTERNATIVES

In accordance with Government Code § 11346.5(a)(13), the Board must determine that no reasonable alternative it considers or that has otherwise been identified and brought to the attention of the Board would be more effective in carrying out the purpose for which the action is proposed, would be as effective and less burdensome to affected private persons than the proposed action, or would be more cost-effective to affected private persons and equally effective in implementing the statutory policy or other provision of law.

CONTACT PERSON

Requests for copies of the proposed text of the regulations, the *Initial Statement of Reasons*, modified text of the regulations and any questions regarding the substance of the proposed action may be directed to:

Board of Forestry and Fire Protection
Attn: Eric Huff
Regulations Coordinator
P.O. Box 944246
Sacramento, CA 94244-2460
Telephone: (916) 653-9633

The designated backup person in the event Mr. Huff is not available is Mr. George Gentry, Executive Officer of the California Board of Forestry and Fire Protection, at the above address and phone.

AVAILABILITY OF STATEMENT OF REASONS AND TEXT OF PROPOSED REGULATIONS

The Board has prepared an *Initial Statement of Reasons* providing an explanation of the purpose, background, and justification for the proposed regulations. The statement is available from the contact person on request. When the *Final Statement of Reasons* has been prepared, the statement will be available from the contact person on request.

A copy of the express terms of the proposed action using UNDERLINE to indicate an addition to the California Code of Regulations and ~~STRIKETHROUGH~~ to indicate a deletion is also available from the contact person named in this notice.

The Board will have the entire rulemaking file, including all information considered as a basis for this proposed regulation, available for public inspection and copying throughout the rulemaking process at its office at the above address. All of the above referenced information is also available on the Board web site at:

http://www.fire.ca.gov/BOF/board/board_proposed_rule_packages.html

AVAILABILITY OF CHANGED OR MODIFIED TEXT

After holding the hearing and considering all timely and relevant comments received, the Board may adopt the proposed regulations substantially as described in this notice. If the Board makes modifications which are sufficiently related to the originally proposed text, it will make the modified text—with the changes clearly indicated—available to the public for at least 15 days before the Board adopts the regulations as revised.

Notice of the comment period on changed regulations, and the full text as modified, will be sent to any person who:

- a) testified at the hearings,
- b) submitted comments during the public comment period, including written and oral comments received at the public hearing, or
- c) requested notification of the availability of such changes from the Board of Forestry and Fire Protection.

Requests for copies of the modified text of the regulations may be directed to the contact person listed in this notice. The Board will accept written comments on the modified regulations for 15 days after the date on which they are made available.



Eric Huff
Regulations Coordinator
Board of Forestry and Fire Protection

California Board of Forestry and Fire Protection

INITIAL STATEMENT OF REASONS

“ROAD RULES, 2013”

[Published August 23, 2013]

Title 14 of the California Code of Regulations (14 CCR),

Division 1.5, Chapter 4, Subchapters 1, 4, 5, 6, Articles 4, 5, 6, 8, and 12;

Subchapter 7, Articles 2, 6.5, 6.8, 6.9, and 7

Amend:

| | |
|-------------------------------|---|
| § 895.1 | Definitions |
| § 914.7 [934.7, 954.7] | Timber Operations, Winter Period |
| § 914.8 [934.8, 954.8] | Tractor Road Watercourse Crossing |
| § 915.1 [934.8, 954.8] | Use of Heavy Equipment for Site Preparation |
| § 916.3 [936.3, 956.3] | General Limitations Near Watercourses, Lakes, Marshes, Meadows and Other Wet Areas |
| § 916.4 [936.4, 956.4] | Watercourse and Lake Protection |
| § 916.9 [936.9, 956.9] | Protection and Restoration of the Beneficial Functions of the Riparian Zone in Watersheds with Listed Anadromous Salmonids |
| § 918.3 [938.3, 958.3] | Roads to be Kept Passable |
| § 923 [943, 963] | Logging Roads and Landings |
| § 923.1 [943.1, 963.1] | Planning for Roads and Landings |
| §923.2 [943.2, 963.2] | Road Construction |
| § 923.3 [943.3, 963.3] | Watercourse Crossings |
| § 923.4 [943.4, 963.4] | Road Maintenance |
| § 923.5 [943.5, 963.5] | Landing Construction |
| § 923.6 [943.6, 963.6] | Conduct of Operations on Roads and Landings |
| § 923.7 [943.7, 963.7] | Licensed Timber Operator Responsibility for Roads and Landings |
| § 923.8 [943.8, 963.8] | Planned Abandonment of Roads, Watercourse Crossings, and Landings |
| § 923.9 [943.9, 963.9] | Roads and Landings in Watersheds with Listed Anadromous Salmonids |
| § 1034 | Contents of Plan |
| § 1051.1 | Contents of Modified THP |
| § 1090.5 | Contents of NTMP |
| § 1090.7 | Notice of Timber Operations Content |
| § 1092.09 | PTHP Contents |
| § 1093.2 | Contents of Road Management Plan |
| § 1104.1 | Conversion Exemptions |

Repeal:

| | |
|--------------------------------|---|
| § 918.3 [938.3, 958.3]. | Roads to be Kept Passable |
| § 923.9.1 [943.9.1] | Measures for Roads and Landings in Watersheds with Coho Salmon |

Adopt:

Technical Rule Addendum Number 5 – “Guidance on Hydrologic Disconnection, Road Drainage, Minimization of Diversion Potential, and High Risk Crossings.”

PUBLIC PROBLEM, ADMINISTRATIVE REQUIREMENT, OR OTHER CONDITION OR CIRCUMSTANCE THE REGULATIONS ARE INTENDED TO ADDRESS

This regulation is intended to satisfy two long-term objectives of benefit to the regulated public, regulatory agencies, the general public, and the natural resources of the State. The first of these objectives is to ensure that all road-related Forest Practice Rules are adequate to prevent adverse impacts to beneficial uses of water. The second objective is to organize all road-related Forest Practice Rules into a logical, consistent order and locate them in one portion of the Forest Practice Rulebook for ease of reference and understanding by all. Logging roads and logging road watercourse crossings have long been recognized as the principal source of sediment delivered to watercourses (McCashion and Rice, 1983; Cafferata and Munn, 2002; Brandow and others, 2006).

It is for this reason that prescriptive and performance-based rules regulating the planning for, construction, use, maintenance, and removal of logging roads, landings, and logging road watercourse crossings are present throughout the Forest Practice Rules (hereafter “Rules”). Changes in the understanding of how road systems interact and influence hydraulic function in watersheds have resulted in periodic changes to road-related Rules. It has likewise resulted in the inclusion of road-related Rules provisions in otherwise non-road related sections. An unfortunate consequence of their ubiquitous presence across multiple Rules sections is that Registered Professional Foresters, review team agencies, and the public alike find it challenging to discern what is required by road-related Rules in any particular context.

As previously mentioned, road-related Rules have historically been the subject of numerous amendments and revision efforts. However, amendments or newly adopted road-related Rules are typically incorporated into Rules sections that are not exclusive to logging roads, landings, and watercourse crossings. Thus, in addition to the Rules specific to logging roads, landings, and crossings contained in Article 12, Title 14 of the California Code of Regulations, beginning with Section 923, there are road-related requirements contained in Rules for the contents of harvesting plans and protection of anadromous salmonids, among other sections.

As a result of the Board’s receipt of one such comprehensive set of proposed revisions to road-related Rules in 1999, the Board appointed an “Inter-Agency Road Rules Task Force.” This Task Force was directed to review existing road-related Rules sections and then advise the Board on possible revisions to these sections. The task force submitted their package of revised road rules to the Board’s Forest Practice Committee in April of 2003. In December of 2004, following review and discussion of the Inter-Agency proposal, the Forest Practice Committee appointed another committee, the “Road Rules Technical Working Group,” and tasked this body with reviewing and revising the technical aspects of the Inter-Agency proposal. In addition, and at the recommendation of the Working Group members, the Board directed the group to try and collate all Rules related to roads, landings, and watercourse crossings into one specific location rather than keeping them diffused throughout the rulebook.

In 2008, the Road Rules Technical Working Group presented their revised “Road Rules” proposal to the Board.

Following a short hiatus to address other more pressing regulatory matters, the Board's Forest Practice Committee returned to its review of the Working Group's proposal. Following years of subsequent review and discussion, the Board authorized at its November 2011 meeting a 90-day public review and comment period for the proposal. In January 2012, the Board's Forest Practice Committee also conducted a multi-day public field trip to state and private timberlands located in the Coast Forest District. The purpose of the field trip was to examine existing logging road and watercourse crossing examples in the context of the rule proposal's requirements.

Thereafter, the Board received extensive written comment and oral testimony during an initial hearing on the 90-day Noticed proposal at its April 2012 meeting. As a result of this extensive comment, the rule proposal was remanded back to the Board's Forest Practice Committee for review and evaluation of proposed revisions offered by a number of commenters. The Forest Practice Committee subsequently undertook an exhaustive 15-month review of the entire rule proposal. This comprehensive review resulted in numerous revisions to the 90-day Notice version of the rule proposal and the drafting of a proposed new Technical Rule Addendum. At its regularly scheduled August 2013 meeting, the Board authorized a 45-day Notice of Rulemaking to solicit public comment on the revised draft rule proposal and accompanying Technical Rule Addendum Number 5.

SPECIFIC PURPOSE AND NECESSITY OF THE REGULATIONS

This regulatory proposal is intended to ensure that waters of the State are adequately protected from the potentially harmful effects of road, landing, and watercourse construction, use, and abandonment associated with timber operations in compliance with the Z'berg-Nejedly Forest Practice Act. It is also intended to improve the utility and coherence of road, landing, and watercourse crossing-related Forest Practice Rules by reorganizing them into one distinct Article for ease of reference and use. An accompanying new Board Technical Rule Addendum was drafted to assist resource professionals and timberland owners toward compliance with the new road and watercourse crossing-related concepts contained in the noticed rule proposal.

The following is a brief summation of the purpose and necessity for each section of the rules proposal with proposed amendments to existing rule section titles shown in **bold underline** and ~~strikeout~~. Completely new section titles are shown in **bold underline**.

§ 895.1 Definitions

This rule section includes new, amended, and repealed definitions for 33 terms. The new or amended definitions are utilized within the text of related sections of the road rules proposal. These new or amended definitions are necessary for understanding the meanings of the terms as they apply to various other regulatory standards. Clear understanding of the meaning of these terms is necessary to ensure broader understanding of the enforceable aspects of the rule proposal by the regulated public, the Department of Forestry and Fire Protection (lead agency), other state review agencies, and the general public.

§ 914.7 [934.7, 954.7] Timber Operations, Winter Period

This rule section has been amended to include the new defined term, "significant sediment discharge" and new references to roads and watercourse crossings. The new term "significant sediment discharge" replaces more ambiguous rule language thereby creating a more succinct and enforceable standard.

The amended rule language is necessary for improved understanding of winter period timber operation prohibitions and enforceable performance expectations.

§ 914.8 [934.8, 954.8] Tractor Road Watercourse Crossing

This rule section has been amended to reference uniform standards for watercourse crossing removal contained in a subsequent new rule section. The purpose of this amendment is to standardize rule language such that all watercourse crossings are removed in a consistent and effective manner. The amendment is necessary to achieve the overarching objectives of road-related rule reorganization, improved rule clarity, and achievement of enforceable performance expectations.

§ 915.1 [934.8, 954.8] Use of Heavy Equipment for Site Preparation

This rule section has been amended to include the new defined term, “significant sediment discharge.” This new term replaces more ambiguous rule language thereby creating a more succinct and enforceable standard. The amended rule language is necessary for improved understanding of enforceable performance expectations during saturated soil conditions.

§ 916.3 [936.3, 956.3] General Limitations Near Watercourses, Lakes, Marshes, Meadows and Other Wet Areas

This rule section has been amended to apply only to tractor roads rather than both tractor and logging roads. The purpose of this change is to distinguish tractor road limitations near watercourses, lakes, marshes, and other wet areas from logging road limitations. This partitioning recognizes the distinctions between tractor and logging roads in terms of surfacing and use. The amendment is necessary to ensure application of enforceable performance standards that are appropriate for tractor roads. It is also necessary for achievement of the overarching objectives of road-related rule reorganization and improved rule clarity.

§ 916.4 [936.4, 956.4] Watercourse and Lake Protection

This rule section has been amended to include a new mapping requirement imposed upon Registered Professional Foresters (RPFs) or their supervised designees. One additional amendment revises the existing term “changeable” to the new term “migrating.” These amendments are consistent with the remainder of the rule proposal and necessary for achievement of the overarching objectives of road-related rule reorganization and improved rule clarity.

§ 916.9 [936.9, 956.9] Protection and Restoration of the Beneficial Functions of the Riparian Zone in Watersheds with Listed Anadromous Salmonids

This rule section has been amended to remove all logging road-related rule provisions that are proposed for inclusion in subsequent logging road-specific rule sections starting with section 923. The purpose for this reorganization is improvement of rule clarity and understanding of enforceable performance expectations by regulated and regulator. This is necessary to reduce confusion in harvesting plan preparation and review, and to broaden the focus of road-related standards.

Repeal § 918.3 [938.3, 958.3]. ~~Roads to be Kept Passable~~

This rule section has been struck completely in order to place a slightly revised version in new rule section 923.6(d). The purpose for this reorganization is improvement of rule clarity and understanding of enforceable performance expectations by regulated and regulator.

Amend Article 12. [Article 11. Northern] Logging Roads, Landings, and Logging Road Watercourse Crossings. Logging Roads and Landings

The title of this Article has been amended to reflect the differentiation between tractor roads, and logging roads and landings. The amendment signals that the subsequent sections apply only to logging roads and landings thereby assuring the regulated public that everything they need to know about road-related rule conformance may now be found in this Article. This is necessary to achieve the rulemaking proposal's objectives of improved rule clarity, utility, and communication of performance expectations.

Amend § 923 [943,963]. Intent for Logging Roads, Landings, and Logging Road Watercourse Crossings Logging Roads and Landings.

This rule section has been amended to be more inclusive of all aspects of road, landing, and watercourse crossing planning, construction, use, maintenance, and abandonment. The purpose and necessity for this section is to set the context for the subsequent and more specific rule sections. Similar to the revision to the title of Article 12, this section signals both the regulated and regulator that every performance standard or expectation pertinent to the entire road system may be found in the sections that follow.

Amend § 923.1[943.1, 963.1]. Planning for Logging Roads and Landings.

This rule section has been amended to expand upon existing items for consideration in the planning for forest transportation systems. The amendments to existing language are centered on treating the road system as a whole rather than a series of individual pieces. This section requires the professional forester to consider utility of the entire system, identify locations where road construction or reconstruction is best minimized, and consider where road realignment and abandonment may be the wisest alternative. The purpose of this section is to set the context for road construction or reconstruction, use, maintenance, and possibly abandonment of certain road segments. This section is necessary to ensure that subsequent action related to the road system is logical, orderly, sensible, and not otherwise conducted in ad hoc fashion.

Amend § 923.2 [943.2, 963.2]. Design and Location for Logging Roads and Landings Road Construction.

This rule section has been amended to expand upon existing logging road and landing construction standards, and to include specific reference to items typically considered by the professional forester during road design and construction. Among the items now specifically included in the amended rule language are public safety, additional geomorphic features such as connected headwall swales, and the potential for erosion and sediment delivery to watercourses. This amended section also includes the new requirement for "hydrologic disconnection" of roads from watercourses and other water bodies. This concept is central to the entire rule proposal and requires the professional forester to design transportation networks such that potential for deleterious delivery of fine sediment to bodies of water is minimized to the greatest extent possible. Additional new rule language is specified to direct transport and storage of road spoils, road gradient and shaping requirements, and minimization of cuts and fills. Lastly, this rule section directs the RPF and timberland owner to the guidance found in the newly drafted "Technical Rule Addendum No. 5." This amended section is necessary to bring road-related State Forest Practice Rules into conformance with state-of-the-art logging road and landing design and construction standards as well as professional expectations.

Amend § 923.3 [943.3, 963.3]. Mapping and Identification for Logging Roads and Landings Watercourse Crossings.

This section has been amended to replace existing rules for watercourse crossings with rule language that directs mapping and identification of logging roads and landings. Watercourse crossing rules have been moved to new rule section 923.10. The requirements contained in this amended section specify how roads are to be shown on harvest planning maps and what portions of road systems must be distinguished from others. The section also directs when and how proposed road segments are to be designated with flagging in the field for inspection by reviewing agencies. The purpose of this section is to give convey performance expectations to the professional forester, capturing existing rule language and including it with revised or new rule language. This section continues the effort toward logical reorganization of all road rules and is necessary for improved clarity and utility.

Amend § 923.4 [943.4, 963.4]. Construction and Reconstruction for Logging Roads and Landings Road Maintenance.

This section has been amended to replace existing road maintenance standards now found in amended section 923.7. The logging road and landing construction and reconstruction standards contained in this section are a combination of existing and new rule language from two different sections. Landing construction currently occupies its own section in the Forest Practice Rules, but would now be included in this amended section. Considerations for geomorphic features have been added as well as refinements of existing slope and watercourse-related limitations, among other items. The amended rule section also continues the theme of referencing the guidance found in the newly drafted “Technical Rule Addendum No. 5.” The purpose for this amended section is to provide professional foresters and timber operators with state-of-the-art guidance on logging road construction and reconstruction techniques and considerations. This amended language is necessary to elevate rule standards to current practical standards while increasing clarity and utility.

Amend § 923.5 [943.5,963.5]. Erosion Control for Logging Roads and Landings Landing Construction.

This section has been amended to replace landing construction rules now located in the previous amended rule section (§ 923.4). The erosion control standards found in a number of existing rule sections are consolidated into this one comprehensive section in keeping with the overarching objective of rule reorganization for improved clarity and utility. This amended rule section now includes drainage requirements consistent with the new standard for “hydrologic disconnection” of roads and landings from waterbodies. To that end, this section also incorporates standards for waterbreaks, including those constructed by hand, outsloping of roads, and construction of rolling dips. Consistent with the preceding amended rule section, this amended rule section also references the guidance to be found in the newly drafted “Technical Rule Addendum No. 5.” This amended section is necessary to promote the new standard of hydrologic disconnection while simultaneously communicating performance standards that are clear and useful to the regulated public and reviewing agencies.

Amend § 923.6 [943.6, 963.6]. Use of Logging Roads and Landings Conduct of Operations on Roads and Landings.

This section has been amended to include the new standards for “stable operating surfaces” and “hydrologic disconnection.”

Both of these standards are central to the objective of reducing the potential for deleterious deposition of sediment from logging roads and landings into watercourses and lakes. As the newly revised section title suggests, this section pertains entirely to the use of transportation systems and the need for protective vigilance in the course of such use. This amended section is necessary for conveyance of the point that inappropriate and untimely use of roads can render even the best constructed road segment a problem from the perspective of resource protection.

Amend § 923.7, 943.7, 963.7 Maintenance and Monitoring for Logging Roads and Landings Licensed Timber Operator Responsibility for Roads and Landings

This amended section removes the Timber Operator responsibility provision in favor of comprehensive maintenance and monitoring standards. In addition to incorporation of existing rule specifications for the erosion control maintenance period, this amended section now includes requirements for extended wet weather period inspections of logging road systems, including inspections to be conducted by representatives of the California Department of Forestry and Fire Protection (*CAL FIRE*). The section goes on to state that compliance with existing Regional Water Quality Control Board monitoring requirements may be used to achieve compliance with inspection standards. The comprehensive water drafting standards previously contained in § 916.9 are now included in this amended rule section. This revision recognizes that water drafting most often occurs in relation to road watering for fugitive dust control and road surface maintenance. The purpose of this amended section is to ensure that roads which are planned, designed, constructed, and used in accordance with the current state-of-the-art standards continue to serve as such throughout their period of existence. This section is necessary if not crucial to achieve the consistent objective of “hydrologic disconnection” from watercourses and lakes.

Amend § 923.8[943.8, 963.8]. Planned Abandonment and Deactivation of Logging Roads, Watercourse Crossings, and Landings.

This amended section recognizes that portions of road systems, including landings, can be completely and permanently abandoned, or temporarily deactivated for some period of time. Standards for abandonment of watercourse crossings have been removed from this section and placed in a new section 923.10 specific to crossing removal. The purpose of this section is to standardize the differentiation between portions of road system that are intended to be used in the future from those that are unlikely to be used again—particularly legacy or older segments no longer useful to management operations. This amended section is necessary to support the overarching objective of hydrologic disconnection of road systems from watercourses and lakes.

Amend § 923.9 [943.9, 963.9]. Roads and Landings in Watersheds with Listed Anadromous Salmonids Watercourse Crossings [All Districts]

This existing rule section has been completely eliminated and replaced with a new, comprehensive rule section addressing logging road watercourse crossings. The previously existing language is now included as a component of previously identified amended and subsequent new sections of this proposal. This removal is necessary to achieve the objectives of improved clarity, utility, and logical reorganization of all logging road and landing-related rules into one location.

The newly drafted watercourse crossing rules are built on the chassis of the previously existing watercourse crossing rules of § 923.3 [943.3, 963.3].

As amended, however, this rule section now includes an integration of the majority of previously proposed watercourse crossing sections identified as §§ 923.10-923.17 in the 2011-12 90-day Noticed version of the rule text. The Board's Forest Practice Committee undertook this approach primarily in recognition of the inherent redundancy built into the previously noticed '17 rule section' version of the rulemaking proposal. Upon examining the currently existing watercourse crossings section (§ 923.3 [943.3, 963.3]), the Committee realized it could simply combine desired crossing provisions into the existing structure of this rule section and reduce the significant redundancies contained in the previous iteration of the rule proposal.

Repeal 923.9.1 [943.9.1]. Measures for Roads and Landings in Watersheds with Coho Salmon.

This existing rule section has been completely eliminated as the language is now included as a component of previously identified amended and subsequent new sections of this proposal. Portions of this proposal include protection standards inclusive of all listed anadromous salmonid species rather than just coho salmon. This removal is necessary to achieve the objectives of improved clarity, utility, and logical reorganization of all logging road and landing-related rules into one location.

Amend § 1034 Contents of Plan

This section has been amended consistent with the proposed changes and new rule sections provided in this rule proposal. The amendment of this section is necessary to ensure that all new or modified requirements for logging roads, landings, and watercourse crossings are incorporated into the contents of Timber Harvesting Plan (THP) submissions.

Amend § 1051.1 Contents of Modified THP

This section has been amended consistent with the proposed changes and new rule sections provided in this rule proposal. The amendment of this section is necessary to ensure that all new or modified requirements for logging roads, landings, and watercourse crossings are incorporated into the contents of Modified Timber Harvesting Plan (MTHP) submissions.

Amend § 1090.5 Contents of NTMP

This section has been amended consistent with the proposed changes and new rule sections provided in this rule proposal. The amendment of this section is necessary to ensure that all new or modified requirements for logging roads, landings, and watercourse crossings are incorporated into the contents of Non-industrial Timber Management Plan (NTMP) submissions.

Amend § 1090.7 Notice of Timber Operations Content

This section has been amended consistent with the proposed changes and new rule sections provided in this rule proposal. The amendment of this section is necessary to ensure that all new or modified requirements for logging roads, landings, and watercourse crossings are incorporated into the contents of Notice of Timber Operations (NTO) submissions tiered to approved Non-industrial Timber Management Plans (NTMPs).

Amend § 1092.09 PTHP Contents

This section has been amended consistent with the proposed changes and new rule sections provided in this rule proposal.

The amendment of this section is necessary to ensure that all new or modified requirements for logging roads, landings, and watercourse crossings are incorporated into the contents of Program Timber Harvesting Plan (PTHP) submissions tiered to certified Program Timberland Environmental Impact Reports (PTEIRs).

Amend § 1093.2 Contents of Road Management Plan

This section has been amended consistent with the proposed changes and new rule sections provided in this rule proposal. The amendment of this section is necessary to ensure that all new or modified requirements for logging roads, landings, and watercourse crossings are incorporated into the contents of Road Management Plan (RMP) submissions.

Amend § 1104.1 Conversion Exemptions

This section has been amended consistent with the proposed changes and new rule sections provided in this rule proposal. The amendment of this section is necessary to ensure that all new or modified requirements for logging roads, landings, and watercourse crossings are incorporated into the contents of Conversion Exemption submissions.

ALTERNATIVES TO THE REGULATIONS CONSIDERED BY THE BOARD AND THE BOARD'S REASONS FOR REJECTING THOSE ALTERNATIVES

The Board has evaluated a number of alternatives to the proposed regulation.

Alternative 1: No Action – No Changes to Existing Rules or Format.

This alternative would result in no change to the California Forest Practice Rules as they currently exist. No attempt would be made to ensure their adequacy for protection of the beneficial uses of water in association with permitted timber operations. No changes to the existing organization and format of the Rules would be proposed for improvement of utility and user comprehension. This alternative does not appear to fulfill the Board's express priority for review of all road-related Forest Practice Rule provisions to ensure state-of-the-art consistency with water quality objectives. Neither does this alternative appear to satisfy the objective of improved road and watercourse rule coherency.

Time spent in the drafting and consideration of a rule proposal is not necessarily a metric by which success or failure can be measured. However, adoption of this alternative would seemingly ignore a decade of effort by many individuals from the regulated public and regulatory agencies. Of course, this alternative could also be chosen, as in previous instances, for the purpose of remanding the rule set back to the Forest Practice Committee for further work. In light of the preceding 15 months spent by the Forest Practice Committee to produce this latest iteration of the rule proposal, this alternative may be the least desirable. Nevertheless, preservation of the status quo remains a valid and viable alternative for the Board's consideration following the October 7, 2013 public hearing on the noticed rule proposal.

Alternative 2: Partial Adoption of Proposal – Adopt Only Board Technical Rule Addendum Number 5.

This alternative would result in the Board's singular adoption of the newly drafted Technical Rule Addendum Number 5 – "Guidance on Hydrologic Disconnection, Road Drainage, Minimization of Diversion Potential, and High Risk Crossings."

All of the proposed amended and repealed rule sections contained in the noticed rule text would not be adopted and the existing rules related to roads and watercourse crossings would remain in their present condition and location.

Under this alternative, the Board's intentions with regard to the concept of hydrologic disconnection would be in the form of guidelines rather than strictly enforceable rule requirements. The rule addendum would be tied to existing road and watercourse-related rule sections, including the existing definition for "hydrologic disconnection" found in rule section 895.1. Adoption of this alternative could serve as a signal of sorts to resource professionals and landowners. It could convey a message that the Board intends for road networks and watercourse crossings to be hydrologically disconnected. Simultaneously, it might also suggest that the Board desires more time to evaluate the proposed rule amendments and their implications to timberland owners and resource professionals.

Given the complexities associated with the rule proposal in terms of dual revision and reorganization, adoption of a guidance document could be viewed as an initial footing from which to expand the Board's efforts. As such, this alternative remains viable for the Board's consideration following the October 7, 2013 public hearing on the noticed rule proposal.

Alternative 3: Partial Adoption of Proposal – Adopt Only Rule Text (Do Not Adopt Technical Rule Addendum Number 5).

This alternative would result in the Board's singular adoption of the amended rule text without the inclusion of Technical Rule Addendum Number 5 – "Guidance on Hydrologic Disconnection, Road Drainage, Minimization of Diversion Potential, and High Risk Crossings." Adoption of this alternative would seemingly recognize the significant duration of rule drafting efforts over the course of the past decade. It could also be perceived as a demonstration of the Board's preference for enforcement over education.

It is true that the proposed rule addendum is not nearly as enforceable as the prescriptive and performance-based provisions of the rule text. However, that is not the intent of such documents. By including a guidance document with the rule set, the Board is in a sense acknowledging the challenges associated with rule compliance. As has been consistently demonstrated in discussions and field excursions, the concept of hydrologic disconnection means different things to different people. The guidance document was intentionally drafted to recognize this fact and to help remedy any disparities in rule comprehension. The combination of the proposed rule set and addendum may therefore be a better alternative than adoption of one or the other alone. Nevertheless, this alternative remains viable for the Board's consideration following the October 7, 2013 public hearing on the noticed rule proposal.

Alternative 4: Adoption of Proposal with Sunset Date.

This alternative would result in the Board's adoption of the complete rulemaking proposal (including Technical Rule Addendum Number 5) with the addition of a specific sunset date by which time the Board must evaluate and reconsider extension of the proposal's lifespan. While proponents of a sunset date might argue that inclusion of such a feature prompts the Board to review the regulation on an ongoing basis, the Board is already obligated by Public Resources Code Section 4553 to continuously review and revise regulations as appropriate.

And, in the absence of a sunset date, the regulated public most affected by the rulemaking proposal has some assurance of regulatory certainty during the timeline of planned operations.

A possible downside to sunset dates that has been demonstrated in other Board rulemaking efforts is the disproportionate amount of meeting and staff time spent on the same regulation. As has been illustrated by other Board regulations adopted with a sunset date, monitoring of rule effectiveness may not yield meaningful information in the time interval between adoption and the initial sunset date. In such instances, the Board is compelled to readopt a regulation with revised sunset dates on one or more occasions until such time as the regulation has been utilized sufficiently to generate meaningful information for its review. In light of the aforementioned existing statutory authority for continuous review and revision of existing regulations, it may be more sensible to rely upon that authority rather than a sunset date to achieve the same objective.

Still, the provision of a sunset date may provide a measure of comfort to both regulator and regulated that the Board intends to closely monitor implementation of the rule set with an eye toward useful revision. For these reasons, this alternative remains viable for the Board's consideration following the October 7, 2013 public hearing on the noticed rule proposal.

Alternative 5: Adoption of Proposal as Noticed.

Under this alternative, the Board would adopt the proposal, including Technical Rule Addendum Number 5, without substantive further modification following the public hearing. The two primary objectives of ensuring state-of-the-art protection of the beneficial uses of water, and improving the clarity and utility of road-related Forest Practice Rules would ostensibly be achieved. This alternative would represent the successful culmination of over a decade's worth of inter-agency collaboration and public participation toward a shared goal. It would likewise acknowledge the past 15 months of effort by Members and participants of the Board's Forest Practice Committee.

The originally noticed proposal was remanded to the Forest Practice Committee for the purpose of evaluating the considerable comment and proposed revisions received, and closely examining the content of the rule proposal. The Committee has certainly completed those tasks and produced a version of the rule text that appears leaner and more on point. The noticed rule text simultaneously retains the comprehensive new provisions aimed at greater hydrologic disconnection. It also now references the newly drafted Technical Rule Addendum Number 5 to help guide both regulated and regulator toward compliance with the Board's intentions.

For these reasons, this alternative remains viable for the Board's consideration following the October 7, 2013 public hearing on the noticed rule proposal.

POSSIBLE SIGNIFICANT ADVERSE ENVIRONMENTAL EFFECTS AND MITIGATIONS

The California Environmental Quality Act (CEQA) requires review, evaluation and environmental documentation of potential significant environmental impacts from a qualified project. The Board's rulemaking process was determined to be categorically exempt from environmental documentation in accordance with 14 CCR 1153(b) (1), Declaration of Categorical Exemptions.

The proposed regulatory amendments would be added elements to the State's comprehensive Forest Practice Program under which all commercial timber management is regulated. The Board's Forest Practice Rules along with the Department of Forestry and Fire Protection's (CAL FIRE's) oversight of Rule compliance function expressly to prevent adverse environmental effects.

Harvesting plans contain a mix of avoidance and mitigation measures that are specifically designed by a licensed professional forester to reduce the risk for potential adverse effects. Each harvesting plan also contains a comprehensive cumulative effects analysis utilized in part to identify potential risks and effects as an aid to the forester's avoidance and mitigation measure development. State, local, and federal agency representatives review every harvesting plan prior to a decision as to approval or denial. State representatives continue with compliance inspections of approved plans until the conclusion of the plan's lifespan. Where Forest Practice Rule standards or approved plan provisions have been violated, specified corrective and/or punitive enforcement measures, including but not limited to financial penalties, are imposed upon the identified offender(s).

In summary, the proposed regulation will not result in significant adverse environmental effects. The regulation is an element of a comprehensive avoidance and mitigation program for commercial timber harvesting activities.

EVIDENCE SUPPORTING FINDING OF NO SIGNIFICANT ADVERSE ECONOMIC IMPACT ON ANY BUSINESS

There are no additional costs to any state agency, nor any state-mandated costs to local agencies of government or school districts that require reimbursement under Part 7, Division 4 (commencing with Section 17500) of the Government Code because of any duties, obligations, or responsibilities imposed on state or local agencies or school districts. This order can be accomplished with no additional net costs or where such costs exist they are entered into voluntarily.

This order does not create any savings or additional costs of administration for any agency of the United States Government over and above the program appropriations made by Congress.

There are no mandates to local governments or school districts.

The proposed regulations would provide a measure of regulatory certainty in resolution of ongoing Forest Practice Rule interpretation questions. It is speculated that this certainty could provide a minor level of cost savings to the affected regulated public.

The Board of Forestry has determined that no statewide alternative considered would be more effective in carrying out the purpose for which this regulation was adopted and would be as effective and least burdensome to affected private persons than the proposed action.

The following economic impact analysis is intended to satisfy the requirements of the Administrative Procedures Act, Government Code Section 11346.3(b).

I. Will the proposed regulation create or eliminate jobs within the State of California?

The proposed regulation includes a number of amendments to existing regulations that are not expected to significantly affect jobs in California. The regulation includes a new Technical Rule Addendum intended to assist the regulated public and regulatory agencies with comprehension and compliance of new rule requirements.

II. Will the proposed regulation create new businesses or eliminate existing businesses within the State of California?

The proposed regulation will neither create new businesses nor eliminate existing businesses in the State of California. The regulatory amendments clarify the intent of the Board with regard to the concept of hydrologic disconnection and establish minimum standards to that end. While compliance with these minimum standards will likely result in increased expenditures for logging road and watercourse crossings, it is not expected to financially bankrupt timberland owners.

III. Will the proposed regulation result in the expansion of businesses currently doing business within the State of California?

The proposed regulation will not result in the expansion of businesses currently doing business within the State. There are a limited number of timberland owners and resource professionals managing timberlands in the state currently. This regulation is not expected to increase or subtract from that number.

IV. Will the proposed regulation provide benefits to the health and welfare of California residents, worker safety, and the state's environment?

The regulation as proposed does not provide benefits to the health and welfare of California residents, or improve worker safety. It is possible that the regulation would be of some unknown benefit to the state's environment. However, it is not clear to what extent the regulation would alter the existing implementation and enforcement of regulations related to logging road networks and watercourse crossings. If adopted, monitoring of the differences between implementation of the pre-existing and revised regulations could expose a discernable difference in environmental protection.

V. What is the estimated expense of proposed regulation upon those most affected?

Commercial timberland owners and managers are the most likely to be affected by the regulation. However, it is unclear to what extent the proposed regulation would alter the existing costs for timber harvest permitting and operations. Those who choose to conduct commercial harvests of their timberlands are currently obligated to comply with the permitting and rule requirements of the State Forest Practice Act and Rules. This regulatory construct is fully compliant with the California Environmental Quality Act.

The harvesting permit required for commercial operations is considered the functional equivalent of an Environmental Impact Report. According to a March 2005 report by Thompson and Dicus entitled, The Impact of California's Changing Environmental Regulations on Timber Harvest Planning Costs, the cost of a one-time harvest permit is in excess of thirty-thousand dollars (\$30,000.00). The permit cost does not include the annual or periodic expenses of property tax, insurance, or management activities (erosion control; water, flora, and fauna monitoring; tree planting and timber stand improvement work; pre-commercial thinning and pruning; etc.)

The regulation as proposed could alter harvest permitting costs and the ongoing expenses identified above. However, it is not currently clear to what extent such effects could be realized. Board staff is continuing to review the differences between existing regulations and those proposed in this notice for the purpose of quantifying potential economic effects prior to the Board's initial hearing on October 7, 2013.

ALTERNATIVES TO THE PROPOSED REGULATORY ACTION THAT WOULD LESSEN ANY ADVERSE IMPACT ON SMALL BUSINESS

The Board of Forestry finds that the adoption of these regulations will not have a significant adverse economic impact on small businesses. There will be no reporting or record keeping requirements in these regulations and compliance requirements are set out in the *Initial Statement of Reasons* and the proposed text of the regulations.

ALTERNATIVES TO THE PROPOSED REGULATORY ACTION THAT WOULD LESSEN ANY ADVERSE IMPACT ON SMALL BUSINESS

The Board finds that this proposed regulation would not have an adverse impact on small business.

EVIDENCE SUPPORTING FINDING OF NO SIGNIFICANT ADVERSE ECONOMIC IMPACT ON ANY BUSINESS

Commercial and non-industrial timberland owners and managers, Licensed Timber Operators, and Registered Professional Foresters are already compelled by existing regulations and resource stewardship principles to limit the potential for adverse impacts from roads, landings, and watercourse crossings. This rulemaking proposal represents a refinement of existing regulations for improved utility and clarity as well as state-of-the-art protection of the beneficial uses of water.

TECHNICAL, THEORETICAL, AND/OR EMPIRICAL STUDY, REPORTS, OR DOCUMENTS

The State Board of Forestry and Fire Protection consulted the following listed information and/or publications as referenced in this *Initial Statement of Reasons*. Unless otherwise noted in this *Initial Statement of Reasons*, the Board did not rely on any other technical, theoretical, or empirical studies, reports or documents in proposing the adoption of this regulation.

1. California Forest Practice Act and Rules, 2007-2011. Public Resources Code § 4511, *et seq.*, Title 14 California Code of Regulations, Chapters 4, 4.5, and 10.

2. "Modified Completion Report Monitoring Program: Monitoring Results from 2001 Through 2004." Monitoring Study Group Final Report prepared for the California State Board of Forestry and Fire Protection. Brandow, C.A., P.H. Cafferata, and J.R. Munn. 2006. Sacramento, CA. 80 p. Available at: http://www.bof.fire.ca.gov/pdfs/MCRFinal_Report_2006_07_7B.pdf
3. "Hillslope Monitoring Program: Monitoring Results from 1996 through 2001." Monitoring Study Group Final Report prepared for the California State Board of Forestry and Fire Protection. Cafferata, P.H., and J.R. Munn. 2002. Sacramento, CA. 114 p. Available at: http://www.bof.fire.ca.gov/pdfs/ComboDocument_8_.pdf
4. Erosion on Logging Roads in Northwestern California: How Much is Avoidable? McCashion, J.D., and R.M. Rice. 1983. *Journal of Forestry* 81(1): 23-26. Available at: <http://www.fs.fed.us/psw/publications/rice/McCashion.pdf>.
5. "Road Rules Committee Executive Summary Outline." Road Rules Committee Presentation to California State Board of Forestry and Fire Protection. March 5, 2008.

Pursuant to Government Code § 11346.2(b)(6)

In order to avoid unnecessary duplication or conflicts with federal regulations contained in the Code of Federal Regulations addressing the same issues as those addressed under the proposed regulation revisions listed in this *Initial Statement of Reasons*; the Board has directed the staff to review the Code of Federal Regulations. The Board staff determined that no unnecessary duplication or conflict exists.

PROPOSED TEXT

The proposed revisions or additions to the existing rule language are represented in the following manner:

The following revisions or additions to the existing rule language are represented in the following manner:

underline indicates an addition to the California Code of Regulations, and

~~strikeout~~ indicates a deletion from the California Code of Regulations.

All other text is existing rule language.

1 **Board of Forestry and Fire Protection**

2 **“ROAD RULES, 2013”**

3 **Title 14 of the California Code of Regulations (14 CCR),**

4 **Division 1.5, Chapter 4, Subchapters 1, 4, 5, 6, Articles 4, 5, 6, 8, and 12;**

5 **Subchapter 7, Articles 2, 6.5, 6.8, 6.9, and 7**

6
7 **Amend:**

| | | |
|----|-------------------------------|--|
| 8 | § 895.1 | Definitions |
| 9 | § 914.7 [934.7, 954.7] | Timber Operations, Winter Period |
| 10 | § 914.8 [934.8, 954.8] | Tractor Road Watercourse Crossing |
| 11 | § 915.1 [934.8, 954.8] | Use of Heavy Equipment for Site Preparation |
| 12 | § 916.3 [936.3, 956.3] | General Limitations Near Watercourses, Lakes, Marshes, |
| 13 | | Meadows and Other Wet Areas |
| 14 | § 916.4 [936.4, 956.4] | Watercourse and Lake Protection |
| 15 | § 916.9 [936.9, 956.9] | Protection and Restoration of the Beneficial Functions of the |
| 16 | | Riparian Zone in Watersheds with Listed Anadromous |
| 17 | | Salmonids |
| 18 | § 918.3 [938.3, 958.3] | Roads to be Kept Passable |
| 19 | § 923 [943, 963] | Logging Roads and Landings |
| 20 | § 923.1 [943.1, 963.1] | Planning for Roads and Landings |
| 21 | §923.2 [943.2, 963.2] | Road Construction |
| 22 | § 923.3 [943.3, 963.3] | Watercourse Crossings |
| 23 | § 923.4 [943.4, 963.4] | Road Maintenance |
| 24 | § 923.5 [943.5, 963.5] | Landing Construction |
| 25 | § 923.6 [943.6, 963.6] | Conduct of Operations on Roads and Landings |

| | | |
|----|-------------------------|---|
| 1 | § 923.7 [943.7, 963.7] | Licensed Timber Operator Responsibility for Roads and |
| 2 | | Landings |
| 3 | § 923.8 [943.8, 963.8] | Planned Abandonment of Roads, Watercourse Crossings, |
| 4 | | and Landings |
| 5 | § 923.9 [943.9, 963.9] | Roads and Landings in Watersheds with Listed Anadromous |
| 6 | | Salmonids |
| 7 | § 1034 | Contents of Plan |
| 8 | § 1051.1 | Contents of Modified THP |
| 9 | § 1090.5 | Contents of NTMP |
| 10 | § 1090.7 | Notice of Timber Operations Content |
| 11 | § 1092.09 | PTHP Contents |
| 12 | § 1093.2 | Contents of Road Management Plan |
| 13 | § 1104.1 | Conversion Exemptions |
| 14 | | |
| 15 | <u>Repeal:</u> | |
| 16 | § 918.3 [938.3, 958.3]. | Roads to be Kept Passable |
| 17 | § 923.9.1 [943.9.1] | Measures for Roads and Landings in Watersheds with Coho |
| 18 | | Salmon |

19

20 **Adopt:**

21 **Technical Rule Addendum Number 5 – “Guidance on Hydrologic Disconnection, Road**

22 **Drainage, Minimization of Diversion Potential, and High Risk Crossings.”**

23

24

25

1 **Amend 14 CCR § 895.1. Definitions.**

2
3 **Abandoned Road** means a logging road on which proactive measures have been applied to
4 effectively remove it from the permanent road network.

5
6 **Abandonment** means ~~leaving a logging road reasonably impassable to standard production~~
7 ~~four wheel-drive highway vehicles, and leaving a logging road and landings, in a condition which~~
8 ~~provides for long-term functioning of erosion controls with little or no continuing maintenance.~~
9 implementing measures to effectively remove an existing logging road, landing, or logging road
10 watercourse crossing from the permanent road network.

11
12 **Appurtenant Road** means a logging road under the ownership or control of the timber owner,
13 timberland owner, timber operator, or plan submitter that will be used for log hauling.

14
15 **Berm** means ~~a curb or dike constructed to control water and prevent roadway runoff waters~~
16 ~~from discharging onto roadside slopes and/or to provide material for subsequent road~~
17 ~~maintenance.~~ a curb, dike, or linear mound of earth that is constructed to control water and direct
18 roadway runoff waters or that has developed through road grading activities.

19
20 **Connected Headwall Swale** means a geomorphic feature consisting of a concave depression
21 with convergent slopes, typically of 65 percent or greater steepness that is connected to a
22 watercourse or lake by way of a continuous linear depression and that has been sculpted over
23 geologic time by shallow landslide events. The slope profile is typically smooth and unbroken
24 by benches, but may be interrupted by recent landslide deposits or scars. Emergent
25 groundwater and wet areas may exist at the base of the swale. Soil and colluvium depth is
typically greatest at the axis of the swale, thinning to either side.

1 **Critical Dip** means a constructed dip or low point across a logging road surface down grade
2 from, or over, a logging road watercourse crossing that functions to prevent crossing overflow
3 from draining down the road and minimizes fill erosion.

4
5 **Crowning** means creating a road surface with a convex cross sectional profile that drains runoff
6 toward both sides of the road.

7
8 **Deactivated Road** means a logging road that is part of the permanent road network where
9 measures have been implemented to prevent active use by logging trucks and standard
10 production four-wheel drive highway vehicles.

11
12 **Deactivation** means implementing measures necessary to prevent the active use of an existing
13 logging road, landing, or logging road watercourse crossing.

14
15 **End-Hauling** means the removal and transportation of excavated ~~excavated~~ material to prevent
16 sidecast.

17
18 **Excess Material** means excavated material that is not used or ~~needed~~ as a functional part of
19 the road or a landing. Excess material is synonymous with spoils.

20
21 **Extended Wet Weather Period** means the period from October 15 to May 1.

22
23 **Fill** means material that is mechanically placed ~~in low areas~~ and built up in compacted lifts to
24 form a the roadbed or landing surface. Fill includes the material placed around culverts and
25 related drainage structures at logging road watercourse crossings.

1 **Ford** means a logging road watercourse crossing where the road grade dips through the
2 watercourse channel.

3
4 **Harvest Area** means the area where trees are felled and removed.

5
6 **Hydrologic Disconnection** means the removal of direct routes of drainage or overland flow of
7 road runoff to a watercourse or lake ~~by directing drainage or overland flow onto stable portions~~
8 ~~of the forest floor to dissipate energy, facilitate percolation, and resist or prevent erosion or~~
9 ~~channelization.~~

10
11 **Insloping** means shaping the logging road or landing surface to drain toward a cutbank or
12 inside ditch.

13
14 **Outsloping** means shaping the road surface to drain toward the outside edge of the logging
15 road or landing.

16
17 ~~**Permanent Road** means a road which is planned and constructed to be part of a permanent all-~~
18 ~~season transportation facility. These roads have a surface which is suitable for the hauling of~~
19 ~~forest products throughout the entire winter period and have drainage structures, if any, at~~
20 ~~watercourse crossings which will accommodate the fifty-year flood flow. Normally they are~~
21 ~~maintained during the winter period. a logging road that is part of the permanent road network~~
22 ~~and is designed for year-round use. These roads have a surface that is suitable for maintaining~~
23 ~~a stable operating surface throughout the year.~~

1 **Permanent Road Network** means the permanent, seasonal, ~~and temporary, and deactivated~~
2 roads, including appurtenant roads, that provide the infrastructure necessary for timber
3 operations and forest management.

4
5 **Permanent Watercourse Crossing** means a watercourse crossing that ~~will be constructed to~~
6 ~~accommodate the estimated fifty-year flood flow and~~ will remain in place when timber operations
7 have been completed.

8
9 **Prescribed Maintenance Period** means the time period, beginning with filing of the work
10 completion report, provided that the report is subsequently approved, during which erosion
11 controls ~~which~~ that are required and constructed as part of a timber operations must be
12 maintained in a functional condition. ~~The period shall not exceed three years from the filing of~~
13 ~~the work completion report provided that the report is subsequently approved by the director.~~

14
15 **Public Road** means a road open to the general public which is: (a) in the State or County road
16 system, or (b) a road on which a public agency has deeded, unlimited easement.

17
18 **Reconstructed Roads** means those existing roads that are to be restored or improved to make
19 useable for hauling forest products; "reconstructed" does not include ~~routine or annual~~ road
20 maintenance or rehabilitation that does not require substantial change in the original prism of
21 the road.

22
23 **Road approach** means the portion of the logging road surface that drains overland water flow
24 to the watercourse crossing.

1 Road Maintenance means activities that do not require substantial change to the logging road
2 prism to maintain stable operating surfaces, functioning logging road drainage facilities and
3 structures, and stable cutbanks and fill slopes. Examples of road maintenance may include
4 rocking a road surface; localized shaping or outsloping; installation and maintenance of rolling
5 and critical dips; restoring functional capacity of inboard ditches, cross drains, or culverts; and
6 repairing water bars.

7
8 Road Prism means all parts of a road including cut banks, ditches, road surfaces, road
9 shoulders, and road fills.

10
11 ~~Seasonal Road~~ means a road which is planned and constructed as part of a permanent
12 ~~transportation facility where: 1) commercial hauling may be discontinued during the winter~~
13 ~~period, or 2) the landowner desires continuation of access for fire control, forest management~~
14 ~~activities, Christmas tree growing, or for occasional or incidental use for harvesting of minor~~
15 ~~forest products, or similar activities. These roads have a surface adequate for hauling of forest~~
16 ~~products in the non-winter periods, and in the extended dry periods or hard frozen conditions~~
17 ~~occurring during the winter period; and have drainage structures, if any, at watercourse crossing~~
18 ~~which will accommodate the fifty-year flood flow. Some maintenance usually is required logging~~
19 road that is part of the permanent road network that is not designed for year-round use. These
20 roads have a surface that is suitable for maintaining a stable operating surface during the
21 season of use.

22
23 Sidecast means excess earthen material pushed or dumped to or over the side of a road or
24 landings.

1 **Significant Sediment Discharge** means soil erosion that is currently, or may be in the future,
2 discharged to watercourses or lakes in quantities that violate Water Quality Requirements or
3 result in significant individual or cumulative adverse impacts to the beneficial uses of water. One
4 indicator of a Significant Sediment Discharge is a visible increase in turbidity to receiving Class
5 I, II, III, or IV waters.

6
7 **Significant Existing or Potential Erosion Site** means a location where soil erosion is
8 currently, or may be in the future, discharged to watercourses or lakes in quantities that violate
9 Water Quality Requirements or result in significant individual or cumulative adverse impacts to
10 the beneficial uses of water.

11
12 **Temporary Road** means a logging road that is to be used only during the timber operations and
13 that will be deactivated or abandoned upon completion of use. ~~These roads have a surface~~
14 ~~adequate for seasonal logging use and have drainage structures, if any, adequate to carry the~~
15 ~~anticipated flow of water during the period of use.~~

16
17 **Through Cut** means a section of road that lies below the adjacent ground level on both sides of
18 the road.

19
20 **Amend 14 CCR § 914.7 [934.7, 954.7]. Timber Operations, Winter Period.**

21 During the winter period:

22 **(a)** Mechanical site preparation and timber harvesting, shall not be conducted unless a winter
23 period operating plan is incorporated in the timber harvesting plan and is followed, or unless the
24 requirements of subsection (c) are met. Cable, helicopter and balloon yarding methods are
25 exempted.

(b) The winter period operating plan shall include the specific measures to be taken in the

1 winter operating period ~~timber operations to minimize damage due to~~ avoid or substantially
2 lessen erosion, soil movement into watercourses and soil compaction from ~~felling, yarding,~~
3 ~~loading, mechanical site preparation, and erosion control activities~~ timber operations. A winter
4 period operating plan shall address the following subjects:

- 5 (1) Erosion hazard rating.
- 6 (2) Mechanical site preparation methods.
- 7 (3) Yarding system (constructed skid trails and tractor road watercourse crossings).
- 8 (4) Operating Period.
- 9 (5) Erosion control facilities timing.
- 10 (6) Consideration of form of precipitation-rain or snow.
- 11 (7) Ground conditions (soil moisture condition, frozen).
- 12 (8) Silvicultural system-ground cover.
- 13 (9) Operations within the WLPZ.
- 14 (10) Equipment use limitations.
- 15 (11) Known unstable areas.
- 16 (12) Logging roads and landings.

17 (c) In lieu of a winter period operating plan, the RPF can specify the following measures in the
18 THP:

19 (1) Tractor yarding or the use of tractors for constructing logging roads, landings,
20 watercourse crossings, layouts, firebreaks or other tractor roads shall be done only during dry,
21 rainless periods and shall not be conducted on saturated soils conditions that may produce
22 significant sediment discharge. ~~sediment in quantities sufficient to cause a visible increase in~~
23 ~~turbidity of downstream waters in receiving Class I, II, III or IV waters or that violate Water~~
24 Quality Requirements.

1 **Amend § 914.8 [934.8, 954.8] Tractor Road Watercourse Crossing**

2 (d) ~~Tractor road W~~watercourse crossing facilities ~~not constructed to permanent crossing~~
3 ~~standards on tractor roads~~ shall be removed and stabilized before the beginning of the winter
4 period. ~~If a watercourse crossing is to be removed, it shall be removed in accordance with to~~
5 ~~the standards of 14 CCR § 923.3(d) [943.3(d), 963.3(d)] 923.9 [943.9, 963.9], subsections~~
6 (p)(1)-(4), or as specified in the winter period operating plan. The RPF may propose an
7 exception if explained and justified in the plan, and found by the Director to be in conformance
8 with this article.

9
10 **Amend 14 CCR § 915.1 [935.1, 955.1]. Use of Heavy Equipment for Site Preparation.**

11 (a) Use of heavy equipment for site preparation shall comply with the provisions set forth in 14
12 CCR 914.2 [934.2, 954.2].

13 (b) Heavy equipment shall not be used for site preparation under saturated soil conditions that
14 may produce significant sediment discharge ~~sediment in quantities sufficient to cause a visible~~
15 ~~increase in turbidity of downstream waters in receiving Class I, II, III or IV waters; that violate~~
16 ~~Water Quality Requirements; or when it cannot operate under its own power due to wet~~
17 conditions.

18
19 **Amend § 916.3 [936.3, 956.3]. General Limitations Near Watercourses, Lakes, Marshes,**
20 **Meadows and Other Wet Areas**

21 (c) The timber operator shall not ~~construct or reconstruct roads,~~ construct or use tractor
22 roads ~~or landings~~ in Class I, II, III or IV watercourses, in the WLPZ, marshes, wet meadows, and
23 other wet areas unless when explained and justified in the ~~THP~~ plan by the RPF, and approved
24 by the Director, except as follows:

25 (1) At prepared tractor road crossings as described in 14 CCR § 914.8(b) [934.8(b),
954.8(b)].

1 (2) Crossings of Class III watercourses ~~which that are dry at the time of timber~~
2 ~~operations use.~~

3 ~~(3) At existing road crossings.~~

4 (4)(3) At new tractor and road crossings approved as part of the Fish and Game Code
5 process (F&GC 1600 et seq.).

6 Use of existing roads is addressed in ~~916.4(a) [936.4(a), 956.4(a)].~~

7
8 **Amend 916.4 [936.4, 956.4]. Watercourse and Lake Protection.**

9 (a) The RPF or supervised designee shall conduct a field examination of and map all lakes
10 and Class I, II, III, and IV watercourses ~~and shall map all lakes and watercourses which contain~~
11 ~~or conduct Class I, II, III or IV waters.~~

12 (1) As part of this field examination, the RPF or supervised designee shall
13 evaluate areas near, and areas with the potential to directly impact, watercourses and lakes for
14 sensitive conditions including, but not limited to, existing and proposed roads, skidtrails and
15 landings, unstable and erodible watercourse banks, unstable upslope areas, debris, jam potential,
16 inadequate flow capacity, ~~changeable~~ migrating channels, overflow channels, flood prone areas,
17 and riparian zones wherein the values set forth in 14 CCR §§ 916.4(b) [936.4(b), 956.4(b)],
18 subsection(b) are impaired. *****

19
20 **Amend § 916.9 [936.9, 956.9]. Protection and Restoration of the Beneficial Functions of**
21 **the Riparian Zone in Watersheds with Listed Anadromous Salmonids.**

22 In addition to all other district Forest Practice Rules, the following requirements shall apply in
23 any watershed with listed anadromous salmonids. Requirements of 14 CCR § 916.9 [936.9,
24 956.9] precede other sections of the FPRs.

25 **Geographic scope** - Requirements for watersheds with listed anadromous salmonids differ
depending on the geographic location of the watershed and geomorphic characteristics of the

1 watercourse. Unique requirements for watersheds with listed anadromous salmonids are set
2 forth for 1) watercourses in the coastal anadromy zone with confined channels, 2) watercourses
3 with flood prone areas or channel migration zones, and 3) watercourses with confined channels
4 located outside the coastal anadromy zone.

5 Watersheds which do not meet the definition of “watersheds with listed anadromous
6 salmonids” are not subject to this section except as follows: The provisions of 14 CCR 916.9
7 [936.9, 956.9], subsections (k)-(q), ~~923.3 [943, 963]~~ and ~~923.9 [943.9, 963.9]~~ also apply to
8 planning watersheds immediately upstream of, and contiguous to, any watershed with listed
9 anadromous salmonids for purposes of reducing significant adverse impacts from transported
10 fine sediment. Projects in other watersheds further upstream that flow into watersheds with
11 listed anadromous salmonids, not otherwise designated above, may be subject to these
12 provisions based on an assessment consistent with cumulative impacts assessment
13 requirements in 14 CCR §§ 898 and 912.9 [932.9, 952.9] and Technical Rule Addendum No. 2,
14 Cumulative Impacts Assessment. These requirements do not apply to upstream watersheds
15 where permanent dams attenuate the transport of fine sediment to downstream watercourses
16 with listed anadromous salmonids.*****

17 *******(f) Class I watercourses -**

18 **(1)** For Class I watercourses, where fish are always or seasonally present or where fish
19 habitat is restorable, any plan involving timber operations within the WLPZ shall contain the
20 following information:

21 **(A)** Clear and enforceable specifications of timber operations within the Class I
22 WLPZ, including a description of how any disturbance, or log or tree cutting and removal shall
23 be carried out to conform with 14 CCR §§ 916.2 [936.2, 956.2], subsection (a) and 916.9 [936.9,
24 956.9], subsection (a).

25 ~~**(B)** A description of all existing permanent logging road watercourse crossings.~~

~~**(C)** Clear and enforceable specifications describing how these crossings are to~~

1 ~~be modified, used, and treated to minimize risks, giving special attention to allowing fish to pass~~
2 ~~both upstream and downstream during all life stages.~~

3 ~~(D) Clear and enforceable specifications for construction and operation of any~~
4 ~~new crossing(s) of a Class I watercourse to prevent direct harm, habitat degradation, water~~
5 ~~velocity increase, hindrance of fish passage, or other potential impairment of beneficial uses of~~
6 ~~water~~

7 ~~(EB) Documentation of how proposed harvesting in the WLPZ contributes to the~~
8 ~~objectives of each zone stated in 14 CCR § 916.9 [936.9, 956.9], subsection (c) and other goals~~
9 ~~in 14 CCR § 916.9 [936.9, 956.9], subsection (a) (1)-(8). Documentation shall include the~~
10 ~~examinations, analysis, and other requirements listed in 14 CCR § 916.4 [936.4, 956.4],~~
11 ~~subsection (a).*****~~

12 ~~***** (3) Class I watercourses with flood prone areas or channel migration~~
13 ~~zones:*****~~

14 ~~***** (E) Preferred Management Practices in the Inner Zone A and B of Flood~~
15 ~~Prone Areas*****~~

16 ~~- **4. Avoid Road and Landing Use:** All new roads and landings~~
17 ~~shall be located outside of zone. When feasible, minimize use of existing roads and landings in~~
18 ~~the flood prone area. No servicing of equipment within the flood prone area. Exceptions~~
19 ~~include the use of roads and landings to accomplish actions to improved salmonid habitat~~
20 ~~conditions stated 14 CCR § 916.9 [936.9, 956.9]. subsection (f)(3)(E(1.)) above.~~

21 ~~**5.4. Avoid Slash concentration and site preparation:******* or pile~~
22 ~~burning.~~

23 ~~**6.5. Delineate Zone on the Ground:******* Locations of all WLPZ~~
24 ~~zones and CMZs shall be designated on the ground.~~

25 ~~**7.6. Avoid Use of Water Drafting Sites:******* or stream alteration~~
~~permits.~~

1 **8.7. Avoid Disturbance to Critical Flood Prone Area**

2 **Habitat:******* and down large woody debris.

3 **(F) Outer Zone:*******

4 ~~*****~~**(k) Year-round logging road, landing and tractor road use limitations.**

5 ~~(1) Logging roads, landings or Ttractor roads shall not be used when operations may~~
6 ~~result in significant sediment discharge visibly turbid water from the road, landing or tractor road~~
7 ~~(skid trail) or an inside ditch associated with the logging road, landing or tractor road may~~
8 ~~produce sediment in quantities sufficient to cause a visible increase in turbidity of downstream~~
9 ~~waters in receiving Class I, II, III or IV waters or violate Water Quality Requirements.~~

10 ~~(2) Log hauling on logging roads and landings shall be limited to those which are~~
11 ~~hydrologically disconnected from watercourses to the extent feasible, and exhibit a stable~~
12 ~~operating surface in conformance with (1) above.~~

13 ~~(3) Concurrent with use for log hauling, approaches to logging road watercourse~~
14 ~~crossings shall be treated for erosion control as needed to minimize soil erosion and sediment~~
15 ~~transport and to prevent the discharge of sediment into watercourses and lakes in quantities~~
16 ~~deleterious to the beneficial uses of water.~~

17 ~~(4) Concurrent with use for log hauling, all traveled surfaces of logging roads in a WLPZ~~
18 ~~or within any ELZ or EEZ designated for watercourse or lake protection shall be treated for~~
19 ~~erosion control as needed to minimize soil erosion and sediment transport and to prevent the~~
20 ~~discharge of sediment into watercourses and lakes in quantities deleterious to the beneficial~~
21 ~~uses of water.~~

22 ~~5) Grading to obtain a drier running surface more than one time before reincorporation~~
23 ~~of any resulting berms back into the road surface is prohibited.~~

24 **(l) Extended Wet Weather Period - October 15 to May 1 shall be considered the extended wet**
25 **weather period and the following shall apply :**

1 ~~(1)~~ No timber operations shall take place unless the approved plan incorporates a
2 complete winter period operating plan pursuant to
3 14 CCR § 914.7 [934.7, 954.7], subsection ~~(a)~~, that specifically addresses, where applicable,
4 proposed logging road, landing or tractor road construction, reconstruction and use during the
5 extended wet weather period. Where logging road watercourse crossing construction or
6 reconstruction is proposed an implementation schedule shall be specified.

7 **(2)** Unless the winter period operating plan proposes operations during an extended wet
8 weather period with low antecedent soil wetness, no tractor roads shall be constructed,
9 reconstructed, or used on slopes that are over 40 percent and within 200 feet of a Class I, II, or
10 III watercourse, as measured from the watercourse or lake transition line during the extended
11 wet weather period.

12 ~~(3)~~ Logging roads, landings and tractor roads shall not be used when sediment from the
13 logging road, landing or tractor road surface is transported to a watercourse or a drainage
14 facility that discharges into a watercourse in amounts sufficient to cause a visible increase in
15 turbidity in Class I, II, III, or IV waters.

16 ~~(4)~~ Logging roads and landings shall not be used for log hauling when saturated soil
17 conditions result in the visible increase in turbidity specified in (3) above. *****

18 ***** **(n) Treatments to stabilize soils** - Within the WLPZ, and within any ELZ or EEZ
19 designated for watercourse or lake protection, treatments to stabilize soils, minimize soil
20 erosion, and prevent significant sediment discharge the discharge of sediment into
21 watercourses or lakes in amounts deleterious to aquatic species or the quality and beneficial
22 uses of water, or that threaten to violate applicable water quality requirements, shall be
23 described in the plan as follows.

24 **(1)*******

25 ~~*****~~**(C)** Disturbed tractor road cut banks and fills, and ~~*****~~

1 **(DC)** Any other area of disturbed soil that threatens to discharge sediment into
2 waters in amounts deleterious to the quality and beneficial uses of water.

3 ~~*****~~**(2)** Soil stabilization treatment measures may include, but need not be limited to, removal,
4 armoring with rip-rap, replanting, mulching, rip-rapping, grass seeding, installing commercial
5 erosion control devices to manufacturer's specifications, or chemical soil stabilizers.

6 **(3)**~~*****~~

7 ~~*****~~**(o)** Section reserved for future use. ~~**Erosion site identification and remedies**~~ ~~*****~~

8 ~~*****~~**(p)** Section reserved for future use. ~~**Erosion control maintenance period**~~ - The erosion
9 control maintenance period on permanent and seasonal roads and associated landings that are
10 not abandoned in accordance with 14 CCR § 923.8 [943.8, 963.8] shall be three years. ~~*****~~

11 ~~*****~~**(r)** Section reserved for future use. ~~**Water drafting**~~ - Water drafting for timber operations
12 shall:

13 ~~**(1)** Comply with Fish and Game Code Section 1600, et seq.~~

14 ~~**(A)** Timber operations conducted under a Fish and Game Code Section 1600
15 master or long-term agreement that includes water drafting may provide proof of such coverage
16 for compliance with this paragraph.~~

17 ~~**(2)** Describe the water drafting site conditions and proposed water drafting activity in the
18 plan, including:~~

19 ~~**(A)** a general description of the conditions and proposed water drafting;~~

20 ~~**(B)** a map showing proposed water drafting locations;~~

21 ~~**(C)** the watercourse classification;~~

22 ~~**(D)** the drafting parameters including the months the site is proposed for use;
23 estimated total volume needed per day; estimated maximum instantaneous drafting rate and
24 filling time; and disclosure of other water drafting activities in the same watershed;~~

25 ~~**(E)** the estimated drainage area (acres) above the point of diversion;~~

~~**(F)** the estimated unimpeded streamflow, pumping rate, and drafting duration,~~

1 ~~(G)~~ a discussion of the effects on aquatic habitat downstream from the drafting
2 site(s) of single pumping operations, or multiple pumping operations at the same location, and
3 at other locations in the same watershed;

4 ~~(H)~~ a discussion of proposed alternatives and measures to prevent adverse
5 effects to fish and wildlife resources, such as reducing hose diameter; using gravity-fed tanks
6 instead of truck pumping; reducing the instantaneous or daily intake at one location; describing
7 allowances for recharge time; using other dust palliatives; and drafting water at alternative sites;
8 and

9 ~~(I)~~ The methods that will be used to measure source streamflow prior to the
10 water drafting operation and the conditions that will trigger streamflow to be measured during
11 the operation.

12 ~~(3)~~ All water drafting for timber operations are subject to each requirement below unless
13 the Department of Fish and Game modifies the requirement in the Lake or Streambed Alteration
14 agreement that authorized the drafting operation, or unless otherwise specified below:

15 ~~(A)~~ All intakes shall be screened to prevent impingement of juvenile fish against
16 the screen. The following requirements apply to screens and water drafting on Class I waters:

17 1. ~~Openings in perforated plate or woven wire mesh screens shall not~~
18 ~~exceed 3/32 inches (2.38 millimeters). Slot openings in wedge wire screens shall not exceed~~
19 ~~1/16 inches (1.75 millimeters).~~

20 2. ~~The screen surface shall have at least 2.5 square feet of openings~~
21 ~~submerged in water.~~

22 3. ~~The drafting operator shall regularly inspect, clean, and maintain~~
23 ~~screens to ensure proper operation whenever water is drafted.~~

24 4. ~~The approach velocity (water moving through the screen) shall not~~
25 ~~exceed 0.33 feet/second.~~

5. ~~The diversion rate shall not exceed 350 gallons per minute.~~

1 ~~(B) Approaches and associated drainage features to drafting locations within a~~
2 ~~WLPZ or channel zone shall be surfaced with rock or other suitable material to minimize~~
3 ~~generation of sediment.~~

4 ~~(C) Barriers to sediment transport, such as straw waddles, logs, straw bales or~~
5 ~~sediment fences, shall be installed outside the normal high water mark to prevent sediment~~
6 ~~delivery to the watercourse and limit truck encroachment.~~

7 ~~(D) Water drafting trucks parked on streambeds and floodplains shall use drip~~
8 ~~pans or other devices such as absorbent blankets, sheet barriers or other materials as needed~~
9 ~~to prevent soil and water contamination from motor oil or hydraulic fluid leaks.~~

10 ~~(E) Bypass flows for Class I watercourses shall be provided in volume sufficient~~
11 ~~to avoid dewatering the watercourse and maintain aquatic life downstream, and shall conform to~~
12 ~~the following standard:~~

13 ~~1. Bypass flows in the source stream during drafting shall be at~~
14 ~~least 2 cubic feet per second.~~

15 ~~2. Diversion rate shall not exceed 10 percent of the surface flow.~~

16 ~~3. Pool volume reduction shall not exceed 10 percent.~~

17 ~~(F) The drafting operator shall keep a log that records for each time water is~~
18 ~~drafted, the date, total pumping time, pump rate, starting time, ending time, and volume~~
19 ~~diverted. Logs shall be filed with the Department of Forestry and Fire Protection at the end of~~
20 ~~seasonal operations and maintained with the plan record. This requirement may be modified in~~
21 ~~the approved plan that covers the water drafting, but only with concurrence from the Department~~
22 ~~of Fish and Game.~~

23 ~~(G) Before commencing any water drafting operation, the RPF and the drafting~~
24 ~~operator shall conduct a pre-operations field review to discuss the water drafting measures in~~
25 ~~the plan and/or Lake or Streambed Alteration Agreement.*****~~

~~***** (v) Site-specific measures or nonstandard operational provisions*****~~

1 **Repeal § 918.3 [938.3, 958.3]. ~~Roads to be Kept Passable~~**

2 Timber operators shall keep all logging truck roads in a passable condition during the dry
3 season for fire truck travel until snag and slash disposal has been completed.
4

5 **Amend Article 12. [Article 11. Northern] Logging Roads, Landings, and Logging Road**

6 **Watercourse Crossings. Logging Roads and Landings**

7
8 **Amend § 923 [943,963]. Intent for Logging Roads, Landings, and Logging Road**

9 **Watercourse Crossings Logging Roads and Landings.**

10 **(a)** All logging roads, landings, and logging road watercourse crossings in the logging area
11 shall be planned, constructed, reconstructed, used, maintained, removed, abandoned, and
12 deactivated in a manner that:

13 **(1)** Is consistent with long-term enhancement and maintenance of the forest
14 resource.

15 **(2)** Accommodates appropriate yarding systems.

16 **(3)** Is economically feasible.

17 **(b)** Such planning, construction, reconstruction, use, maintenance, removal, abandonment,
18 and deactivation shall occur in a manner that considers safety and avoids or substantially
19 lessens significant adverse impacts to, among other things:

20 **(1)** Fish and wildlife habitat and listed species of fish and wildlife.

21 **(2)** Water quality and the beneficial uses of water.

22 **(3)** Soil resources.

23 **(4)** Significant archeological and historical sites.

24 **(5)** Air quality.

25 **(6)** Visual resources.

(7) Fire hazard.

1 (c) The RPF may propose exceptions to the rules of this Article if explained and justified in
2 the plan and found by the Director not to result in a significant adverse impact on the
3 environment.

4 (d) Exceptions may also be provided through application of Fish and Game Code Sections
5 1600 et seq. and shall be made an enforceable part of the plan in accordance with 14 CCR §§
6 1039, 1040, 1090.14, 1092.26, or 1092.27, as appropriate.

7 (e) For watersheds with listed anadromous salmonids and for planning watersheds
8 immediately upstream of, and contiguous to, any watershed with listed anadromous salmonids
9 all logging roads, landings, and logging road watercourse crossings shall be planned, designed,
10 constructed and reconstructed, used, maintained, abandoned, deactivated, and removed in
11 accordance with 14 CCR § 916.9 (a) and (c) [936.9 (a) and (c), 956.9 (a) and (c)].

12 (f) The provisions of Articles 12 [Article 11 for Northern District] that apply in watersheds
13 with listed anadromous salmonids and in planning watersheds immediately upstream of, and
14 contiguous to, any watershed with listed anadromous salmonids shall not apply to a plan that is
15 subject to:

16 (1) A valid incidental take permit issued by DFG pursuant to Section 2081(b) of the Fish
17 and Game Code that addresses anadromous salmonid protection; or

18 (2) A federal incidental take statement or incidental take permit that addresses
19 anadromous salmonid protection, for which a consistency determination has been made
20 pursuant to Section 2080.1 of the Fish and Game Code; or

21 (3) A valid natural community conservation plan that addresses anadromous salmonid
22 protection approved by DFG under section 2835 of the Fish and Game Code; or

23 (4) A valid Habitat Conservation Plan (HCP) that addresses anadromous salmonid
24 protection, approved under Section 10 of the federal Endangered Species Act of 1973; or

25 (5) Project revisions, guidelines, or take avoidance measures pursuant to a
memorandum of understanding or a planning agreement entered into between the plan

1 submitter and DFG in preparation of obtaining a natural community conservation plan that
2 addresses anadromous salmonid protection.

3 ~~All logging roads and landings in the logging area shall be planned, located, constructed,~~
4 ~~reconstructed, used, and maintained in a manner which: is consistent with long-term~~
5 ~~enhancement and maintenance of the forest resource; best accommodates appropriate yarding~~
6 ~~systems, and economic feasibility; minimizes damage to soil resources and fish and wildlife~~
7 ~~habitat; and prevents degradation of the quality and beneficial uses of water. The provisions of~~
8 ~~this article shall be applied in a manner which complies with this standard.~~

9 ~~Factors that shall be considered when selecting feasible alternatives (see 14 CCR 897 and~~
10 ~~898) shall include, but are not limited to, the following:~~

11 ~~(a) Use of existing roads whenever feasible.~~

12 ~~(b) Use of systematic road layout patterns to minimize total mileage.~~

13 ~~(c) Planned to fit topography to minimize disturbance to the natural features of the site.~~

14 ~~(d) Avoidance of routes near the bottoms of steep and narrow canyons, through marshes and~~
15 ~~wet meadows, on unstable areas, and near watercourses or near existing nesting sites of~~
16 ~~threatened or endangered bird species.~~

17 ~~(e) Minimization of the number of watercourse crossings.~~

18 ~~(f) Location of roads on natural benches, flatter slopes and areas of stable soils to minimize~~
19 ~~effects on watercourses.~~

20 ~~(g) Use of logging systems which will reduce excavation or placement of fills on unstable~~
21 ~~areas.~~

22
23 **Amend § 923.1[943.1, 963.1]. Planning for Logging Roads and Landings.**

24 Logging roads and landings shall be planned and located within the context of a systematic
25 layout pattern that considers 14 CCR § 923(b), uses existing logging roads and landings where
feasible and appropriate, and provides access for fire and resource protection activities.

1 (a) Logging roads and landings shall be planned and located to minimize the following:

2 (1) Duplicative roads and total road mileage.

3 (2) The number of logging road watercourse crossings.

4 (3) Construction and reconstruction near watercourses, lakes, marshes, wet
5 meadows, and other wet areas.

6 (4) Construction and reconstruction across steep areas that lead without flattening to
7 Class I, II, III, or IV watercourses and lakes.

8 (5) Construction and reconstruction on unstable areas or in connected headwall
9 swales.

10 (6) Construction and reconstruction near nesting sites of rare, threatened, or
11 endangered bird species.

12 (7) Construction and reconstruction near populations of rare, threatened, or
13 endangered plants.

14 (8) Ground disturbance and the size of cuts and fills.

15 (9) The potential for affecting surface hydrology, including but not limited to,
16 concentrating or diverting runoff or draining the logging road or landing surface directly into a
17 watercourse or lake.

18 (10) Maintenance needs while being compatible with the logging road classification
19 and long-term road usage.

20 (b) No logging roads or landings shall be planned for construction (i) within 150 feet of the Class
21 I watercourse transition line, (ii) within 100 feet of the Class II watercourse transition line on
22 slopes greater than 30%, (iii) within Class I, II, III, or IV watercourses or lakes, (iv) within a
23 WLPZ, or (v) in marshes, wet meadows, and other wet areas, except as follows:

24 (1) At existing logging road watercourse crossings.

25 (2) At logging road watercourse crossings to be constructed or reconstructed that
are approved as part of the Fish and Game Code process (F&GC 1600 et seq.)

1 (3) At logging road watercourse crossings of Class III watercourses that are dry at
2 the time of use.

3 (c) No logging roads or landings shall be planned for reconstruction (i) within Class I, II, III, or IV
4 watercourses or lakes, (ii) within a WLPZ, or (iii) in marshes, wet meadows, and other wet
5 areas, except as follows:

6 (1) At existing logging road watercourse crossings.

7 (2) At logging road watercourse crossings to be constructed or reconstructed that
8 are approved as part of the Fish and Game Code process (F&GC 1600 et seq.)

9 (3) At logging road watercourse crossings of Class III watercourses that are dry at
10 the time of use.

11 (d) Logging roads and landings shall be planned and located to avoid unstable areas and
12 connected headwall swales. The Director may approve an exception if those areas are
13 unavoidable and site-specific measures to minimize slope instability due to logging road or
14 landing construction or reconstruction are described and justified in the plan.

15 (e) As part of the planning and use of logging roads, landings, and watercourse crossings in
16 the logging area, the RPF or supervised designee shall: (i) locate and map significant existing
17 and potential erosion sites and (ii) specify feasible treatments to mitigate significant adverse
18 impacts from the road or landing.

19 (1) The RPF shall evaluate all logging roads and landings in the logging area, including
20 appurtenant roads, for evidence of significant existing and potential erosion sites.

21 (2) For significant existing and potential erosion sites identified per 14 CCR § 923.1
22 [943.1, 963.1] subsection (e)(1), the RPF shall consider the following key factors as part of
23 developing necessary treatments:

24 (A) Type of road (permanent, seasonal, or temporary road), road location,
25 expected log truck haul routes, and traffic use (e.g. volume and season) of each road segment
during the life of the plan.

1 (B) Age of road and the history of sediment delivery from existing roads.

2 (C) Beneficial uses of the watercourse or lake and sensitive conditions
3 potentially affected by the road including, but not limited to, watercourse classification and
4 presence of listed anadromous salmonids.

5 (D) The hillslope grade, road grade of crossing approaches and the gradient
6 of the stream channel.

7 (E) The erodibility of hillslope material exposed by the road.

8 (F) The length of hydrologic connectivity of a road segment, the physical
9 properties of the connected segment and the presence or absence of an effective sediment filter
10 strip.

11 (G) Site-specific information regarding the condition of and location of all existing
12 or potential sediment sources including, but not limited to: watercourse crossings, road
13 approaches, ditch relief culverts, road surfaces, road cuts, road fills, inboard ditches, through-
14 cuts, and landings.

15 (3) The RPF shall submit a list of the significant existing and potential erosion sites
16 identified per 14 CCR § 923.1 [943.1, 963.1], subsection (e)(1) which have feasible treatments
17 with the plan. This list shall include the following information:

18 (A) A map showing the location(s) of significant existing and potential erosion
19 site(s) with a unique identifier for each site.

20 (B) Brief description of present condition of the mapped significant existing or
21 potential erosion site.

22 (C) Brief description of proposed treatments for the mapped significant existing or
23 potential erosion site.

24 (D) Items (B) and (C) above can be provided in tabular form as part of the plan.

25

1 (4) The RPF shall disclose and map the significant existing and potential erosion sites
2 identified per 14 CCR § 923.1 [943.1, 963.1], subsection (d)(1), for which no feasible treatment
3 measures exist.

4 (5) Where feasible treatments for significant existing or potential erosion site are
5 proposed, the RPF shall describe in the plan a logical order of treatment.

6 (f) When selecting feasible alternatives (see 14 CCR §§ 897 and 898) during the planning
7 phase of logging roads and landings, the RPF shall consider the location and planned use of
8 logging roads and landings and whether such logging roads and landings will be abandoned or
9 deactivated.

10 (g) In watersheds with listed anadromous salmonids and in planning watersheds immediately
11 upstream of, and contiguous to, any watershed with listed anadromous salmonids, where
12 logging road or landing construction or reconstruction is proposed, the plan shall identify:

13 (1) How the proposed operations will fit into the systematic layout pattern.

14 (2) What, if any, offsetting mitigation measures, including but not limited to,
15 abandonment of logging roads and landings, are needed to minimize potential adverse impacts
16 to watersheds from the road system.

17 (h) In watersheds with listed anadromous salmonids no logging roads or landings shall be
18 planned for construction or reconstruction in the CMZ or Core Zone of a Class I watercourse
19 except those listed in 14 CCR § 916.9(e)(1)(A)-(E) [936.9(e)(1)(A)-(E), 956.9(e)(1)(A)-(E)] or
20 pursuant to 14 CCR § 916.9(v) [936.9(v), 956.9(v)], or within 150 feet of a Class I watercourse
21 transition line.

22 (i) In watersheds with listed anadromous salmonids within the Inner Zone A and B of flood
23 prone areas of Class I watercourses the following Preferred Management Practices should be
24 considered for inclusion in the plan by the RPF and by the Director:

25 (1) Constructed and reconstructed logging roads and landings should not be planned for
location within these zones.

1 (2) When feasible, planned use of existing logging roads and landings should be
2 minimized in the flood prone area.

3 (3) Exceptions include the use of roads and landings to accomplish actions to improve
4 salmonid habitat conditions stated in 14 CCR § 916.9(f)(3)(E)(1) [936.9(f)(3)(E)(1),
5 956.9(f)(3)(E)(1)].

6 ~~The following standards for logging roads and landings shall be adhered to:~~

7 ~~(a) All logging roads shall be located and classified on the THP map as permanent, seasonal, or~~
8 ~~temporary. Road failures on existing roads which will be reconstructed shall also be located on~~
9 ~~the THP map. In addition to the requirements of 14 CCR 1034(x), the probable location of those~~
10 ~~landings which require substantial excavation or which exceed one quarter acre in size, shall be~~
11 ~~shown on the THP map.~~

12 ~~(b) New logging roads shall be planned in accordance with their classification and maintenance~~
13 ~~requirements.~~

14 ~~(c) Logging roads and landings shall be planned and located, when feasible, to avoid unstable~~
15 ~~areas. The Director shall approve an exception if those areas are unavoidable, and site-specific~~
16 ~~measures to minimize slope instability due to construction are described and justified in the~~
17 ~~THP.~~

18 ~~(d) Where roads and landings will be located across 100 feet or more of lineal distance on any~~
19 ~~slopes over 65% or on slopes over 50% which are within 100 ft. of the boundary of a WLPZ,~~
20 ~~measures to minimize movement of soil and the discharge of concentrated surface runoff shall~~
21 ~~be incorporated in the THP. The Director may waive inclusion of such measures where the RPF~~
22 ~~can show that slope depressions, drainage ways, and other natural retention and detention~~
23 ~~features are sufficient to control overland transport of eroded material. The Director may require~~
24 ~~end-hauling of material from areas within 100 ft. of the boundary of a WLPZ to a stable location~~
25 ~~if end-hauling is feasible and is necessary to protect water quality. The Director shall require~~

1 maintenance provisions in the THP for drainage structures and facilities provided that such
2 maintenance is feasible and necessary to keep roadbeds and fills stable.

3 ~~(e) New logging roads shall not exceed a grade of 15% except that pitches of up to 20% shall
4 be allowed not to exceed 500 continuous feet (152.4 m). These percentages and distances may
5 be exceeded only where it can be explained and justified in the THP that there is no other
6 feasible access for harvesting of timber or where in the Northern or Southern Districts use of a
7 gradient in excess of 20% will serve to reduce soil disturbance.~~

8 ~~(f) Roads and landings shall be planned so that an adequate number of drainage facilities and
9 structures are installed to minimize erosion on roadbeds, landing surfaces, sidecast and fills.~~

10 ~~(g) Unless exceptions are explained and justified in the THP, general planning requirements for
11 roads shall include:~~

12 ~~(1) Logging roads shall be planned to a single-lane width compatible with the largest type of
13 equipment used in the harvesting operation with turnouts at reasonable intervals.~~

14 ~~(2) Roads shall be planned to achieve as close a balance between cut volume and fill volume as
15 is feasible.~~

16 ~~(3) When roads must be planned so that they are insloped and ditched on the uphill side,
17 drainage shall be provided by use of an adequate number of ditch drains.~~

18 ~~(h) Road construction shall be planned to stay out of Watercourse and Lake Protection Zones.
19 When it is a better alternative for protection of water quality or other forest resources, or when
20 such roads are the only feasible access to timber, exceptions may be explained and justified in
21 the THP and shall be agreed to by the Director if they meet the requirements of this subsection.~~

22 ~~(i) [Coast] The location of all logging roads to be constructed shall be flagged or otherwise
23 identified on the ground before submission of a THP or major amendment. Exceptions may be
24 explained and justified in the THP and agreed to by the Director if flagging is unnecessary as a
25 substantial aid to examining: (1) compatibility between road location and yarding and~~

1 silvicultural systems, or (2) possible significant adverse effects of road location on water quality,
2 soil productivity, wildlife habitat, or other special features of the area.

3 ~~(i) [Northern, Southern]~~ All logging roads to be constructed shall be flagged or otherwise
4 identified on the ground before submission of a THP or, substantial deviation, except for
5 temporary roads less than 600 ft. in length that would meet the requirements for a minor
6 deviation (see 14 CCR 1036, 1039, 1040) if they were submitted as such. Exceptions may be
7 explained and justified in the THP and agreed to by the Director if flagging or other identification
8 is unnecessary as a substantial aid to examining: (1) compatibility between road location and
9 yarding and silvicultural systems or (2) possible significant adverse effects of road location on
10 water quality, soil productivity, wildlife habitat, or other special features of the area.

11 ~~(j)~~ If logging roads will be used from the period of October 15 to May 1, hauling shall not occur
12 when saturated soil conditions exist on the road that may produce sediment in quantities
13 sufficient to cause a visible increase in turbidity of downstream waters in receiving Class I, II, III
14 or IV waters or that violate Water Quality Requirements.

15
16 **Amend § 923.2 [943.2, 963.2]. Design and Location for Logging Roads and Landings Road**
17 **Construction.**

18 Constructed and reconstructed logging roads and landings shall be designed and located in
19 accordance with their proposed use, maintenance requirements, and the approved plan:

20 (a) All logging roads and landings shall:

21 (1) Avoid or mitigate potential impacts to public safety.

22 (2) Avoid unstable areas and connected headwall swales to the extent feasible and
23 minimize activities that adversely affect them.

24 (3) Minimize the size of cuts and fills to the extent feasible.

25 (4) Be outsloped where feasible and drained with waterbreaks or rolling dips in
conformance with other applicable Forest Practice Rules.

1 (5) Be hydrologically disconnected from watercourses and lakes to the extent feasible to
2 minimize sediment delivery from road runoff to a watercourse, and reduce the potential for
3 hydrologic changes that alter the magnitude and frequency of runoff delivery to a watercourse.
4 Guidance on methods for hydrologic disconnection may be found in the Board's Technical Rule
5 Addendum Number 5.

6 (6) Include adequate drainage structures and facilities necessary to avoid concentrating
7 and diverting runoff, to minimize erosion of roadbeds, landing surfaces, drainage ditches,
8 sidecast and fills, to minimize the potential for soil erosion and sediment transport, and to
9 prevent significant sediment discharge. Guidance on methods for conformance with this rule
10 section may be found in the Board's Technical Rule Addendum Number 5.

11 (7) Avoid crossing, or locations on, 100 feet or more of lineal distance over any
12 slopes greater than 65 percent or within 100 feet of the boundary of a WLPZ on slopes greater
13 than 50 percent that drain toward the zoned watercourse or lake. Where logging road or
14 landing construction or reconstruction is proposed in these areas, specific measures to minimize
15 movement of soil and the discharge of concentrated surface runoff shall be incorporated in the
16 plan. The Director may waive inclusion of such measures where the RPF can show that slope
17 depressions, drainage ways, and other natural retention and detention features are sufficient to
18 control overland transport of eroded material.

19 (b) The Director may require removal of deposits of excess material if the deposits are in a
20 position to adversely affect the beneficial uses of water.

21 (c) Excess material excavated during logging road and landing construction shall not be
22 transported to locations where it may result in significant sediment discharge.

23 (d) In addition to the requirements of subsection (a) above, all logging roads to be
24 constructed or to be reconstructed shall:

1 (1) Be no wider than a single-lane compatible with the largest type of equipment
2 specified for use on the logging road, with adequate turnouts provided as required for safety,
3 except where wider road dimensions are required by existing contracts with a federal agency.

4 (2) Avoid grades greater than 20% or grades greater than 15% that extend greater than
5 500 continuous feet. Exceptions may be approved where there is no other feasible access for
6 harvesting of timber or where use of a gradient greater than 20% will serve to reduce soil
7 disturbance.

8 (e) In addition to the requirements of subsection (a) above, all landings to be constructed or
9 to be reconstructed shall:

10 (1) Be consistent with the yarding and loading system to be used.

11 (2) Be no larger than one-half acre.

12 (3) Avoid construction on slopes greater than 40 percent where the landing will
13 exceed one-quarter acre in size.

14 ~~Logging roads shall be constructed or reconstructed in accordance with the following~~
15 ~~requirements or as proposed by the RPF, justified in the THP, and found by the Director to be in~~
16 ~~conformance with the requirements of this Article.~~

17 ~~(a) Logging roads shall be constructed in accordance with the approved THP. If a change in~~
18 ~~designation of road classification is subsequently made, the change shall be reported in~~
19 ~~accordance with 14 CCR 1039 or 1040, as appropriate.~~

20 ~~(b) Where a road section which is greater than 100 feet in length crosses slopes greater than~~
21 ~~65%, placement of fill is prohibited and placement of sidecast shall be minimized to the degree~~
22 ~~feasible. The Director may approve an exception where site specific measures to minimize~~
23 ~~slope instability, soil erosion, and discharge of concentrated surface runoff are described and~~
24 ~~justified in the THP.~~

25 ~~(c) On slopes greater than 50%, where the length of road section is greater than 100 ft., and the~~
~~road is more than 15 ft. wide (as measured from the base of the cut slope to the outside of the~~

1 ~~berm or shoulder of the road) and the fill is more than 4 ft. in vertical height at the road shoulder~~
2 ~~for the entire 100 feet the road shall be constructed on a bench that is excavated at the~~
3 ~~proposed toe of the compacted fill and the fill shall be compacted. The Director may approve~~
4 ~~exception to this requirement where on a site-specific basis if the RPF has described and~~
5 ~~justified an alternative practice that will provide equal protection to water quality and prevention~~
6 ~~of soil erosion.~~

7 ~~**(d) [Coast]** Fills, including through fills across watercourses shall be constructed in a manner to~~
8 ~~minimize erosion of fill slopes using techniques such as insloping through-fill approaches,~~
9 ~~waterbars, berms, rock armoring of fill slopes, or other suitable methods.~~

10 ~~**(d) [Northern, Southern]** Roads shall be constructed so no break in grade, other than that~~
11 ~~needed to drain the fill, shall occur on through fill; breaks in grade shall be above or below the~~
12 ~~through fill, as appropriate. Where conditions do not allow the grade to break as required,~~
13 ~~through fills must be adequately protected by additional drainage structures or facilities.~~

14 ~~**(e)** Through fills shall be constructed in approximately one foot lifts.~~

15 ~~**(f)** On slopes greater than 35 percent, the organic layer of the soil shall be substantially~~
16 ~~disturbed or removed prior to fill placement. The RPF may propose an exception in the THP and~~
17 ~~the Director may approve the exception where it is justified that the fill will be stabilized.~~

18 ~~**(g)** Excess material from road construction and reconstruction shall be deposited and stabilized~~
19 ~~in a manner or in areas where downstream beneficial uses of water will not be adversely~~
20 ~~affected.~~

21 ~~**(h)** Drainage structures and facilities shall be of sufficient size, number and location to carry~~
22 ~~runoff water off of roadbeds, landings and fill slopes. Drainage structures or facilities shall be~~
23 ~~installed so as to minimize erosion, to ensure proper functioning, and to maintain or restore the~~
24 ~~natural drainage pattern. Permanent watercourse crossings and associated fills and approaches~~
25 ~~shall be constructed where feasible to prevent diversion of stream overflow down the road and~~
~~to minimize fill erosion should the drainage structure become plugged.~~

1 ~~(i) Where there is evidence that soil and other debris is likely to significantly reduce culvert~~
2 ~~capacity below design flow, oversize culverts, trash racks, or similar devices shall be installed in~~
3 ~~a manner that minimizes culvert blockage.~~

4 ~~(j) Waste organic material, such as uprooted stumps, cull logs, accumulations of limbs and~~
5 ~~branches, and unmerchantable trees, shall not be buried in road fills. Wood debris or cull logs~~
6 ~~and chunks may be placed and stabilized at the toe of fills to restrain excavated soil from~~
7 ~~moving downslope.~~

8 ~~(k) Logging roads shall be constructed without overhanging banks.~~

9 ~~(l) Any tree over 12 inches (30.5 cm) d.b.h. with more than 25% of the root surface exposed by~~
10 ~~road construction, shall be felled concurrently with the timber operations.~~

11 ~~(m) Sidecast or fill material extending more than 20 ft. (6.1 m) in slope distance from the outside~~
12 ~~edge of the roadbed which has access to a watercourse or lake which is protected by a WLPZ~~
13 ~~shall be seeded, planted, mulched, removed, or treated as specified in the THP, to adequately~~
14 ~~reduce soil erosion.~~

15 ~~(n) All culverts at watercourse crossings in which water is flowing at the time of installation shall~~
16 ~~be installed with their necessary protective structures concurrently with the fill, construction and~~
17 ~~reconstruction of logging roads. Other permanent drainage structures shall be installed no later~~
18 ~~than October 15. For construction and reconstruction of roads after October 15, drainage~~
19 ~~structures shall be installed concurrently with the activity.~~

20 ~~(o) Drainage structures and drainage facilities on logging roads shall not discharge on erodible~~
21 ~~fill or other erodible material unless suitable energy dissipators are used. Energy dissipators~~
22 ~~suitable for use with waterbreaks are described in 14 CCR 914.6(f) [934.6(f), 954.6(f)].~~

23 ~~(p) Where roads do not have permanent and adequate drainage, the specifications of Section~~
24 ~~914.6 [934.6, 954.6] shall be followed.~~

1 ~~(q) Drainage facilities shall be in place and functional by October 15. An exception is that~~
2 ~~waterbreaks do not need to be constructed on roads in use after October 15 provided that all~~
3 ~~such waterbreaks are installed prior to the start of rain that generates overland flow.~~

4 ~~(r) No road construction shall occur under saturated soil conditions that may produce sediment~~
5 ~~in quantities sufficient to cause a visible increase in turbidity of downstream waters in receiving~~
6 ~~Class I, II, III or IV waters or that violate Water Quality Requirements, except that construction~~
7 ~~may occur on isolated wet spots arising from localized ground water such as springs, provided~~
8 ~~measures are taken to prevent material from significantly damaging water quality.~~

9 ~~(s) Completed road construction shall be drained by outsloping, waterbreaks and/or cross-~~
10 ~~draining before October 15. If road construction takes place from October 15 to May 1, roads~~
11 ~~shall be adequately drained concurrent with construction operations.~~

12 ~~(t) Roads to be used for log hauling during the winter period shall be, where necessary,~~
13 ~~surfaced with rock in depth and quantity sufficient to maintain a stable road surface that does~~
14 ~~not produce sediment in quantities that may cause a visible increase in turbidity of downstream~~
15 ~~waters in receiving Class I, II, III or IV waters or would violate Water Quality Requirements~~
16 ~~throughout the period of use. Exceptions may be proposed by the RPF, justified in the THP, and~~
17 ~~found by the Director to be in conformance with the requirements of this subsection.~~

18 ~~(u) Slash and other debris from road construction shall not be bunched against residual trees~~
19 ~~which are required for silvicultural or wildlife purposes, nor shall it be placed in locations where it~~
20 ~~could be discharged into Class I or II watercourses.~~

21 ~~(v) Road construction activities in the WLPZ, except for stream crossings or as specified in the~~
22 ~~THP, shall be prohibited.~~

23
24 **Amend § 923.3 [943.3, 963.3]. Mapping and Identification for Logging Roads and**
25 **Landings Watercourse Crossings.**

The following mapping and identification standards shall apply to logging roads and landings:

1 (a) For logging road- and landing-related mapping requirements refer to 14 CCR §§
2 1034(x)(4)(A)-(E) and (5)(A)-(G), 1090.5(w)(4)(A)-(E) and (5)-(6), 1090.5(gg), 1090.7(n)(4)-(6),
3 and 1092.09(l)(5)(A)1.-5. and (6)(A)-(G).

4 (b) The RPF shall identify in the field, for use by the LTO, all logging roads and landings to be
5 constructed or to be reconstructed:

6 (1) Across slopes greater than 65 percent for 100 lineal feet or more.

7 (2) Across slopes greater than 50 percent for 100 lineal feet or more within 100 feet
8 of the boundary of a WLPZ that drains toward the zoned watercourse or lake.

9 (c) The location of all logging roads to be constructed or to be reconstructed shall be flagged or
10 otherwise identified on the ground prior to the pre-harvest inspection. Exceptions may be
11 explained and justified in the plan and agreed to by the Director if flagging is unnecessary as a
12 substantial aid to examining: (1) compatibility between logging road location and yarding and
13 silvicultural systems, or (2) possible significant adverse effects of logging road location on the
14 factors listed under 14 CCR § 923(b) [943(b), 963(b)].

15 ~~Watercourse crossing drainage structures on logging roads shall be planned, constructed,~~
16 ~~reconstructed, and maintained or removed, according to the following standards. Exceptions~~
17 ~~may be provided through application of Fish and Game Code Sections 1600 et seq. and shall~~
18 ~~be included in the THP.~~

19 ~~(a) The location of all new permanent watercourse crossing drainage structures and temporary~~
20 ~~crossings located within the WLPZ shall be shown on the THP map. If the structure is a culvert~~
21 ~~intended for permanent use, the minimum diameter of the culvert shall be specified in the plan.~~
22 ~~Extra culverts beyond those shown in the THP map may be installed as necessary.~~

23 ~~(b) The number of crossings shall be kept to a feasible minimum.~~

24 ~~(c) Drainage structures on watercourses that support fish shall allow for unrestricted passage of~~
25 ~~all life stages of fish that may be present, and shall be fully described in the plan in sufficient~~

1 ~~clarity and detail to allow evaluation by the review team and the public, provide direction to the~~
2 ~~LTO for implementation, and provide enforceable standards for the inspector.~~

3 ~~(d) When watercourse crossings, other drainage structures, and associated fills are removed,~~
4 ~~the following standards shall apply:~~

5 ~~(1) Fills shall be excavated to form a channel that is as close as feasible to the natural~~
6 ~~watercourse grade and orientation, and that is wider than the natural channel.~~

7 ~~(2) The excavated material and any resulting cut bank shall be sloped back from the channel~~
8 ~~and stabilized to prevent slumping and to minimize soil erosion. Where needed, this material~~
9 ~~shall be stabilized by seeding, mulching, rock armoring, or other suitable treatment.~~

10 ~~(e) All permanent watercourse crossings that are constructed or reconstructed shall~~
11 ~~accommodate the estimated 100-year flood flow, including debris and sediment loads.~~

12 ~~(f) Watercourse crossings and associated fills and approaches shall be constructed or~~
13 ~~maintained to prevent diversion of stream overflow down the road and to minimize fill erosion~~
14 ~~should the drainage structure become obstructed. The RPF may propose an exception where~~
15 ~~explained in the THP and shown on the THP map and justified how the protection provided by~~
16 ~~the proposed practice is at least equal to the protection provided by the standard rule.~~

17 ~~(g) All new permanent culverts on Class I watercourses, where fish are always or seasonally~~
18 ~~present or where fish habitat is restorable, shall be planned, designed and constructed to allow~~
19 ~~upstream and downstream passage of fish or listed aquatic species during any life stage and for~~
20 ~~the natural movement of bedload to form a continuous bed through the culvert and shall require~~
21 ~~an analysis and specifications demonstrating conformance with the intent of this section and~~
22 ~~subsection.~~

1 **Amend § 923.4 [943.4, 963.4]. Construction and Reconstruction for Logging Roads and**
2 **Landings Road Maintenance.**

3 Logging roads and landings shall be constructed or reconstructed in accordance with the
4 approved plan and the following requirements. If a change in designation of logging road
5 classification is made after the plan is approved, the change shall be reported in accordance
6 with 14 CCR §§ 1039, 1040, 1090.14, 1092.26 or 1092.27, as appropriate.

7 **(a) Logging roads and landings shall be hydrologically disconnected from watercourses and**
8 **lakes to the extent feasible to minimize sediment delivery from road runoff to a watercourse, and**
9 **reduce the potential for hydrologic changes that alter the magnitude and frequency of runoff**
10 **delivery to a watercourse. Guidance on methods for hydrologic disconnection may be found in**
11 **the Board's Technical Rule Addendum Number 5.**

12 **(b) No logging roads or landings shall be constructed (i) within 150 feet of the Class I**
13 **watercourse transition line, (ii) within 100 feet of the Class II watercourse transition line on**
14 **slopes greater than 30%, (iii) within Class I, II, III, or IV watercourses or lakes, (iv) within a**
15 **WLPZ, or (v) in marshes, wet meadows, and other wet areas, except as follows:**

16 **(1) At existing logging road watercourse crossings.**

17 **(2) At logging road watercourse crossings to be constructed or reconstructed that**
18 **are approved as part of the Fish and Game Code process (F&GC 1600 et seq.)**

19 **(3) At logging road watercourse crossings of Class III watercourses that are dry at**
20 **the time of use.**

21 **(c) No logging roads or landings shall be reconstructed (i) within Class I, II, III, or IV**
22 **watercourses or lakes, (ii) within a WLPZ, or (iii) in marshes, wet meadows, and other wet**
23 **areas, except as follows:**

24 **(1) At existing logging road watercourse crossings.**

25 **(2) At logging road watercourse crossings to be constructed or reconstructed that**
are approved as part of the Fish and Game Code process (F&GC 1600 et seq.)

1 (3) At logging road watercourse crossings of Class III watercourses that are dry at
2 the time of use.

3 (d) Logging roads and landings shall not be constructed or reconstructed across unstable areas
4 or connected headwall swales except as specified in the Plan.

5 (e) Logging roads and landings shall not be constructed with overhanging banks.

6 (f) Any tree over 12 inches dbh with more than 25 percent of the root surface exposed by
7 logging road or landing construction shall be felled concurrently with the timber operations.

8 (g) On slopes greater than 40 percent, the organic layer of the soil shall be removed prior to fill
9 placement.

10 (h) Waste organic material, such as uprooted stumps, cull logs, accumulations of limbs and
11 branches, and unmerchantable trees, shall not be buried in logging road or landing fills. Wood
12 debris or cull logs and chunks may be placed and stabilized at the toe of fill to restrain
13 excavated soil from moving downslope.

14 (i) Slash and other debris from road construction shall not be bunched against residual trees,
15 which are required for silvicultural or wildlife purposes, nor shall it be placed in locations where it
16 could be discharged into Class I or II watercourses or lakes.

17 (j) Where constructed fills will exceed three feet in vertical thickness, fill slopes shall be inclined
18 no greater than 65 percent.

19 (k) Logging roads or landings shall not be constructed or reconstructed under saturated soil
20 conditions that may produce significant sediment discharge, except that construction may occur
21 on isolated wet spots arising from localized ground water such as springs, provided measures
22 are taken to prevent significant sediment discharge.

23 (l) Construction or reconstruction of logging roads or landings shall not take place during the
24 winter period unless the approved plan incorporates a complete winter period operating plan
25 pursuant to 14 § CCR 914.7 [934.7, 954.7] that specifically addresses such logging road or
landing construction or reconstruction.

1 (m) On slopes greater than 50 percent for greater than 100 lineal feet, fills greater than four feet
2 in vertical height at the outside shoulder of the logging road or landing shall be:

3 (1) Constructed on a bench that is excavated at the proposed toe of the fill and is wide
4 enough to compact the first lift.

5 (2) Compacted in approximately one-foot lifts from the toe to the finished grade or
6 retained by an engineered structure.

7 (n) Logging roads and landings approved for construction or reconstruction across 100 feet or
8 more of lineal distance on any slope greater than 65 percent or within 100 feet of the boundary
9 of a WLPZ on slopes greater than 50 percent that drain toward the zoned watercourse or lake
10 shall be constructed to the specific construction techniques or measures as described in the
11 plan.

12 (o) Fills shall not be constructed on slopes greater than 65 percent.

13 (p) On slopes greater than 65 percent, sidecast from logging road and landing construction
14 shall be minimized to the degree feasible.

15 (q) Excess material transported from logging road or landing construction or reconstruction
16 shall be deposited and stabilized in a manner and in areas that avoid potential adverse impacts
17 to locations that could deliver significant sediment discharge.

18 (r) In watersheds with listed anadromous salmonids, no logging roads or landings shall be
19 constructed or reconstructed within the CMZ or Core Zone of a Class I watercourse except for
20 those listed in 14 CCR § 916.9 [936.9, 956.9], subsections (e)(1)(A)-(F) or pursuant to 14 CCR
21 § 916.9 [936.9, 956.9], subsection (v).

22 (s) In watersheds with listed anadromous salmonids and in planning watersheds immediately
23 upstream of, and contiguous to, any watershed with listed anadromous salmonids, the following
24 shall apply:

25 (1) On slopes greater than 50 percent that have access to a watercourse or lake:

1 (A) Specific provisions for the protection of salmonid habitat shall be identified
2 and described for all logging road construction.

3 (B) Where cutbank stability is not an issue, logging roads may be constructed as
4 a full-benched cut (no fill). Spoils not utilized in logging road construction shall be disposed of in
5 stable areas with less than 30 percent slope outside of any WLPZ, EEZ, or ELZ designated for
6 watercourse or lake protection. The Director, with concurrence from other responsible
7 agencies, may waive inclusion of these measures where the RPF can show that slope
8 depressions and other natural retention and detention features are sufficient to control overland
9 transport of eroded material.

10 (C) Logging roads may be constructed with balanced cuts and fills:

11 (i) If properly engineered, or,

12 (ii) If fills are removed and the slopes recontoured prior to the winter
13 period.

14 (2) During the extended wet weather period, no timber operations shall take
15 place unless the approved plan incorporates a complete winter period operating plan
16 pursuant to 14 CCR § 914.7(b) [934.7(b), 954.7(b)]. The winter period operating plan
17 shall specifically address, where applicable, proposed logging road and landing
18 construction, and reconstruction.

19 ~~Logging roads, landings, and associated drainage structures used in a timber operation shall be~~
20 ~~maintained in a manner which minimizes concentration of runoff, soil erosion, and slope~~
21 ~~instability and which prevents degradation of the quality and beneficial uses of water during~~
22 ~~timber operations and throughout the prescribed maintenance period. In addition those roads~~
23 ~~which are used in connection with stocking activities shall be maintained throughout their use~~
24 ~~even if this is beyond the prescribed maintenance period.~~

25 ~~(a) The prescribed maintenance period for erosion controls on permanent and seasonal roads~~
~~and associated landings and drainage structures which are not abandoned in accordance with~~

1 ~~14 CCR 923.8 [943.8, 963.8] shall be at least one year. The Director may prescribe a~~
2 ~~maintenance period extending up to three years in accordance with 14 CCR 1050.~~

3 ~~(b) Upon completion of timber operations, temporary roads and associated landings shall be~~
4 ~~abandoned in accordance with 14 CCR 923.8 [943.8, 963.8].~~

5 ~~(c) Waterbreaks shall be maintained as specified in 14 CCR 914.6 [934.6, 954.6].~~

6 ~~(d) Unless partially blocked to create a temporary water source, watercourse crossing facilities~~
7 ~~and drainage structures, where feasible, shall be kept open to the unrestricted passage of~~
8 ~~water. Where needed, trash racks or similar devices shall be installed at culvert inlets in a~~
9 ~~manner which minimizes culvert blockage. Temporary blockages shall be removed by~~
10 ~~November 15.~~

11 ~~(e) Before the beginning of the winter period, all roadside berms shall be removed from logging~~
12 ~~roads or breached, except where needed to facilitate erosion control.~~

13 ~~(f) Drainage structures, if not adequate to carry water from the fifty-year flood level, shall be~~
14 ~~removed in accordance with 14 CCR 923.3(d) [943.3(d), 963.3(d)] by the first day of the winter~~
15 ~~period, before the flow of water exceeds their capacity if operations are conducted during the~~
16 ~~winter period, or by the end of timber operations whichever occurs first. Properly functioning~~
17 ~~drainage structures on roads that existed before timber operations need not be removed. An~~
18 ~~RPF may utilize an alternative practice, such as breaching of fill, if the practice is approved by~~
19 ~~the Director as providing greater or equal protection to water quality as removal of the drainage~~
20 ~~structure.~~

21 ~~(g) Temporary roads shall be blocked or otherwise closed to normal vehicular traffic before the~~
22 ~~winter period.~~

23 ~~(h) During timber operations, road running surfaces in the logging area shall be treated as~~
24 ~~necessary to prevent excessive loss of road surface materials by, but not limited to, rocking,~~
25 ~~watering, chemically treating, asphaltting or oiling.~~

1 ~~(i) Soil stabilization treatments on road or landing cuts, fills, or sidecast shall be installed or~~
2 ~~renewed, when such treatment could minimize surface erosion which threatens the beneficial~~
3 ~~uses of water.~~

4 ~~(j) Drainage ditches shall be maintained to allow free flow of water and minimize soil erosion.~~

5 ~~(k) Action shall be taken to prevent failures of cut, fill, or sidecast slopes from discharging~~
6 ~~materials into watercourses or lakes in quantities deleterious to the quality or beneficial uses of~~
7 ~~water.~~

8 ~~(l) Each drainage structure and any appurtenant trash rack shall be maintained and repaired as~~
9 ~~needed to prevent blockage and to provide adequate carrying capacity. Where not present, new~~
10 ~~trash racks shall be installed if there is evidence that woody debris is likely to significantly~~
11 ~~reduce flow through a drainage structure.~~

12 ~~(m) Inlet and outlet structures, additional drainage structures (including ditch drains), and other~~
13 ~~features to provide adequate capacity and to minimize erosion of road and landing fill and~~
14 ~~sidecast to minimize soil erosion and to minimize slope instability shall be repaired, replaced, or~~
15 ~~installed wherever such maintenance is needed to protect the quality and beneficial uses of~~
16 ~~water.~~

17 ~~(n) Permanent watercourse crossings and associated approaches shall be maintained to~~
18 ~~prevent diversion of stream overflow down the road should the drainage structure become~~
19 ~~plugged. Corrective action shall be taken before the completion of timber operations or the~~
20 ~~drainage structure shall be removed in accordance with 14 CCR Section 923.3(d) [943.3(d),~~
21 ~~963.3(d)].~~

22 ~~(o) Except for emergencies and maintenance needed to protect water quality, use of heavy~~
23 ~~equipment for maintenance is prohibited during wet weather where roads or landings are within~~
24 ~~a WLPZ.~~

25 ~~(p) The Director may approve an exception to a requirement set forth in subsections (b) through~~
~~(e) above when such exceptions are explained and justified in the THP and the exception would~~

1 provide for the protection of the beneficial uses of water or control erosion to a standard at least
2 equal to that which would result from the application of the standard rule.

3
4 **Amend § 923.5 [943.5,963.5]. Erosion Control for Logging Roads and Landings-Landing**
5 **Construction.**

6 The following erosion control standards shall apply to logging roads and landings:

7 (a) All logging road and landing surfaces shall be adequately drained through the use of logging
8 road and landing surface shaping in combination with the installation of drainage structures or
9 facilities and shall be hydrologically disconnected from watercourses and lakes to the extent
10 feasible. Guidance on methods for hydrologic disconnection may be found in the Board's
11 Technical Rule Addendum Number 5.

12 (b) Drainage facilities and structures shall be installed along all logging roads and all landings
13 that are used for timber operations in sufficient number to minimize soil erosion and sediment
14 transport and to prevent significant sediment discharge.

15 (c) Ditch drains, associated necessary protective structures, and other features associated with
16 the ditch drain shall:

17 (1) Be adequately sized to convey runoff.

18 (2) Minimize erosion of logging road and landing surfaces.

19 (3) Avoid discharge onto unprotected fill.

20 (4) Discharge to erosion resistant material.

21 (5) Minimize potential adverse impacts to slope stability.

22 (d) Waterbreaks and rolling dips installed across logging roads and landings shall be of
23 sufficient size and number and be located to avoid collecting and discharging concentrated
24 runoff onto fills, erodible soils, unstable areas, and connected headwall swales.

25 (e) Where logging roads or landings do not have permanent and adequate drainage, and where
waterbreaks are to be used to control surface runoff, the waterbreaks shall be cut diagonally a

1 minimum of six inches into the firm roadbed and shall have a continuous firm embankment of at
 2 least six inches in height immediately adjacent to the lower edge of the waterbreak cut. On
 3 logging roads that have firmly compacted surfaces, waterbreaks may be installed by hand
 4 methods and need not provide the additional six-inch embankment provided the waterbreak
 5 ditch is constructed so that it is at least six inches deep and six inches wide on the bottom and
 6 provided there is ample evidence based on slope, material, amount of rainfall, and period of use
 7 that the waterbreaks so constructed will be effective in diverting water flow from the logging road
 8 surface without the embankment.

9 (f) Distances between waterbreaks shall not exceed the following standards and consider
 10 erosion hazard rating and road gradient:

11 **MAXIMUM DISTANCE BETWEEN WATERBREAKS**

| <u>Estimated</u> | <u>Logging Road Gradient in Percent</u> | | |
|-------------------------|--|---------------------|----------------------|
| <u>Hazard</u> | <u>10 or less</u> | <u>11-25</u> | <u>>25</u> |
| <u>Rating</u> | <u>Feet</u> | <u>Feet</u> | <u>Feet</u> |
| <u>Extreme</u> | 100 | 75 | 50 |
| <u>High</u> | 150 | 100 | 75 |
| <u>Moderate</u> | 200 | 150 | 100 |
| <u>Low</u> | 300 | 200 | 150) |

20 (g) Where outsloping and rolling dips are used to control surface runoff, the dip in the logging
 21 road grade shall be sufficient to capture runoff from the logging road surface. The steepness of
 22 cross-slope gradient in conjunction with the logging road or landing gradient and the estimated
 23 soil erosion hazard rating shall be used to determine the rolling dip spacing in order to minimize
 24 soil erosion and sediment transport and to prevent significant sediment discharge.

25 (h) Drainage facilities and structures shall discharge into vegetation, woody debris, or rock
wherever possible. Where erosion-resistant material is not present, slash, rock, or other energy

1 dissipating material shall be installed below the drainage facility or drainage structure outlet as
2 necessary to minimize soil erosion and sediment transport and to prevent significant sediment
3 discharge.

4 (i) Where logging road and landing surfaces, road approaches, inside ditches and drainage
5 structures cannot be hydrologically disconnected, and where there is existing or the potential for
6 significant sediment discharge, necessary and feasible treatments to prevent the discharge will
7 be described in the plan.

8 (j) All logging roads and landings used for timber operations shall have adequate drainage
9 upon completion of use for the year or by October 15, whichever is earlier. An exception is that
10 drainage facilities and drainage structures do not need to be constructed on logging roads and
11 landings in use during the extended wet weather period provided that all such drainage facilities
12 and drainage structures are installed prior to the start of rain that generates overland flow.

13 (k) Where logging road or landing construction or reconstruction takes place during the
14 extended wet weather period, drainage facilities and drainage structures shall be installed
15 concurrent with construction or reconstruction operations.

16 (l) Bare soil on logging road or landing cuts, fills, transported spoils, or sidecast that is created
17 or exposed by timber operations shall be stabilized to the extent necessary to minimize soil
18 erosion and sediment transport and to prevent significant sediment discharge. Sites to be
19 stabilized include, but are not limited to:

20 (1) Sidecast or fill exceeding 20 feet in slope distance from the outside edge of a
21 logging road or a landing that has access to a watercourse or lake.

22 (2) Cut and fills associated with approaches to logging road watercourse crossings
23 of Class I or II waters or Class III waters where an ELZ, EEZ, or a WLPZ is required.

24 (3) Bare areas exceeding 800 continuous square feet within a WLPZ.

25 (m) Soil stabilization measures shall be described in the plan pursuant to 14 CCR 923.5(l)
[943.5(l),963.5(l)], and may include, but are not limited to, removal, armoring with rip-rap.

1 replanting, mulching, seeding, installing commercial erosion control devices to manufacturer's
2 specifications, or chemical stabilizers.

3 (n) Where the natural ability of ground cover within a WLPZ is inadequate to protect the
4 beneficial uses of water by minimizing soil erosion or by filtering sediments, the plan shall
5 specify protection measures to retain and improve the natural ability of the ground cover to filter
6 sediment and minimize soil erosion.

7 (o) Soil stabilization treatments shall be in place upon completion of operations for the year of
8 use or prior to the extended wet weather period, whichever comes first. An exception is that
9 bare areas created during the extended wet weather period shall be treated prior to the start of
10 rain that generates overland flow, or within 10 days, whichever is sooner, or as agreed to by the
11 Director.

12 (p) Overhanging or unstable concentrations of slash, woody debris or soil along the downslope
13 edge or face of landings shall be removed or stabilized when it is located on slopes greater than
14 65 percent, within 100 feet of the boundary of a WLPZ on slopes greater than 50 percent that
15 drain toward the zoned watercourse or lake, or when it may result in significant sediment
16 discharge. Removed materials shall not be placed at disposal sites that could result in a
17 significant sediment discharge.

18 (q) In watersheds with listed anadromous salmonids and in planning watersheds immediately
19 upstream of, and contiguous to, any watershed with listed anadromous salmonids, the following
20 shall apply:

21 (1) Constructed and reconstructed logging roads shall be outsloped where feasible
22 and drained with waterbreaks or rolling dips.

23 (2) In addition to the provisions listed under 14 CCR § 923.2(d)(2) [943.2(d)(2),
24 963.2(d)(2)], all permanent and seasonal logging roads with a grade of 15 percent or greater
25 that extend 500 continuous feet or more shall have specific erosion control measures stated in
the plan.

1 (3) Within the WLPZ, and within any ELZ or EEZ designated for watercourse or lake
2 protection, treatments to stabilize soils, minimize soil erosion, and prevent significant sediment
3 discharge shall be described in the plan as follows:

4 (A) In addition to the requirements of subsections (l)-(o), soil stabilization is
5 required for the following areas:

6 (i) Areas exceeding 100 continuous square feet where timber
7 operations have exposed bare soil, and

8 (ii) Disturbed logging road and landing cut banks and fills, and

9 (iii) Any other area of disturbed soil that threatens to cause significant
10 sediment discharge.

11 (B) Where straw mulch is used, the minimum straw coverage shall be 90
12 percent, and any treated area that has been reused or has less than 90 percent surface cover
13 shall be treated again by the end of timber operations.

14 (C) Where slash mulch is applied, slash coverage in contact with the ground
15 surface shall be a minimum of 75 percent.

16 (D) For areas disturbed outside of the extended wet weather period, treatment
17 shall be completed prior to the start of any rain that causes overland flow across or along the
18 disturbed surface that could result in significant sediment discharge.

19 (E) For areas disturbed during the extended wet weather period, treatment
20 shall be completed prior to any day for which a chance of rain of 30 percent or greater is
21 forecast by the National Weather Service or within 10 days of disturbance, whichever is earlier.

22 (F) Where the natural ability of ground cover is inadequate to protect the
23 beneficial uses of water by minimizing soil erosion or by filtering sediments within any ELZ or
24 EEZ designated for watercourse or lake protection, the plan shall specify protection measures to
25 retain and improve the natural ability of the ground cover to filter sediment and minimize soil
erosion.

1 ~~Landings shall be constructed according to the following standards:~~

2 ~~(a) On slopes greater than 65%, no fill shall be placed and sidecast shall be minimized to the~~
3 ~~degree feasible. The Director may approve an exception if, site specific measures to minimize~~
4 ~~slope instability, soil erosion, and discharge of concentrated surface runoff are described and~~
5 ~~justified in the THP.~~

6 ~~(b) On slopes greater than 50%, fills greater than 4 ft. in vertical height at the outside shoulder~~
7 ~~of the landing shall be: 1) constructed on a bench that is excavated at the proposed toe of the fill~~
8 ~~and is wide enough to compact the first lift, and 2) compacted in approximately 1 ft. lift from the~~
9 ~~toe to the finished grade. The RPF or supervised designee shall flag the location of this bench~~
10 ~~or the RPF shall provide a description of the bench location (narrative or drawing) in the THP for~~
11 ~~fills meeting the above criteria, where the length of landing section is greater than 100 feet. The~~
12 ~~RPF may propose an exception in the THP and the Director may approve the exception where it~~
13 ~~is justified that the landing will be stabilized.~~

14 ~~(c) Waste organic material, such as uprooted stumps cull logs, accumulations of limbs and~~
15 ~~branches, or unmerchantable trees, shall not be buried in landing fills. Wood debris or cull logs~~
16 ~~and chunks may be placed and stabilized at the toe of landing fills to restrain excavated soil~~
17 ~~from moving downslope.~~

18 ~~(d) Constructed landings shall be the minimum in width, size, and number consistent with the~~
19 ~~yarding and loading system to be used. Landings shall be no larger than one-half acre (.202 ha)~~
20 ~~unless explained and justified in the THP.~~

21 ~~(e) No landing construction shall occur under saturated soil conditions that may produce~~
22 ~~sediment in quantities sufficient to cause a visible increase in turbidity of downstream waters in~~
23 ~~receiving Class I, II, III or IV waters or that violate Water Quality Requirements.~~

24 ~~(f) The following specifications shall be met upon completion of timber operations for the year or~~
25 ~~prior to October 15, whichever occurs first:~~

1 ~~(1) Overhanging or unstable concentrations of slash, woody debris and soil along the~~
2 ~~downslope edge or face of the landings shall be removed or stabilized when they are located on~~
3 ~~slopes over 65% or on slopes over 50% within 100 ft. of a WLPZ.~~

4 ~~(2) Any obstructed ditches and culverts shall be cleaned.~~

5 ~~(3) Landings shall be sloped or ditched to prevent water from accumulating on the landings.~~
6 ~~Discharge points shall be located and designed to reduce erosion.~~

7 ~~(4) Sidecast or fill material extending more than 20 feet in slope distance from the outside edge~~
8 ~~of the landing and which has access to a watercourse or lake shall be seeded, planted,~~
9 ~~mulched, removed or treated as specified in the THP to adequately reduce soil erosion.~~

10 ~~(5) Sidecast or fill material extending across a watercourse shall be removed in accordance with~~
11 ~~standards for watercourse crossing removal set forth in 14 CCR 923.3 (d).~~

12 ~~(g) On slopes greater than 35%, the organic layer of the soil shall substantially removed prior to~~
13 ~~fill placement.~~

14 ~~(h) When landings are constructed after October 15 they shall be adequately drained concurrent~~
15 ~~with construction operations and shall meet the requirements of (f)(1) through (f)(4) of this~~
16 ~~subsection upon completion of operations at that landing.~~

17 ~~(i) The RPF may propose and the Director may approve waiver of requirements in (f)(1) through~~
18 ~~(f)(4) of this subsection if the Director finds they are not necessary to minimize erosion or~~
19 ~~prevent damage to downstream beneficial uses. The Director may also approve an exception to~~
20 ~~the October 15th date for treatment of slash and debris, including the practice of burning.~~

21
22 **Amend § 923.6 [943.6, 963.6]. Use of Logging Roads and Landings Conduct of**
23 **Operations on Roads and Landings.**

24 The following use standards shall apply to logging roads and landings:

25 (a) Logging roads and landings shall be used in a manner that is consistent with their design
and construction specifications.

1 (b) Logging roads and landings shall not be used during any time of the year when operations
2 may result in significant sediment discharge to watercourse or lakes, except in emergencies to
3 protect the road, to reduce erosion, to protect water quality, or in response to public safety
4 needs.

5 (c) During the extended wet weather period, Log hauling or other heavy equipment uses shall
6 be limited to logging roads and landings that exhibit a stable operating surface in conformance
7 with (b) above. Routine use of logging roads and landings shall not occur when equipment
8 cannot operate under its own power.

9 (d) When burning permits are required pursuant to PRC § 4423, logging roads and landings
10 that are in use shall be kept in passable condition for fire trucks.

11 (e) Roadside berms that impede logging road drainage, concentrate logging road surface flow,
12 or lead to hydrologic connection shall be removed or breached before the beginning of the
13 winter period, with the exception of berms needed for erosion control.

14 (f) Temporary roads shall be blocked or otherwise closed to standard production four-wheel
15 drive highway vehicles prior to the winter period, or upon completion of use as specified in an
16 approved winter period operating plan pursuant to 14 CCR § 914.7(b) [934.7(b), 954.7(b)].

17 (g) Logging roads and landings used for log hauling or other heavy equipment uses during the
18 winter period shall occur on a stable operating surface and, where necessary, be surfaced with
19 rock to a depth and quantity sufficient to maintain such a surface. Use is prohibited on roads
20 that are not hydrologically disconnected and exhibit saturated soil conditions. Exceptions may
21 be proposed by the RPF, when locations are disclosed and justified in the THP, consistent with
22 14 CCR 923 (c), and approved by the Director.

23 (h) In watersheds with listed anadromous salmonids and in planning watersheds immediately
24 upstream of, and contiguous to, any watershed with listed anadromous salmonids, the following
25 shall apply:

1 (1) Existing logging roads or landings shall not be used within the CMZ of a Class I
2 watercourse except as listed in 14 CCR § 916.9 916.9 [936.9, 956.9] subsection (e)(1)(A)-(F) or
3 pursuant to 14 CCR § 916.9(v) [936.9(v), 956.9(v)].

4 (2) When feasible, minimize use of existing logging roads and landings located
5 within Inner Zones A and B of flood prone areas. Exceptions include the use of roads and
6 landings to accomplish actions to improve salmonid habitat conditions stated in 14 CCR § 916.9
7 916.9(f)(3)(E)(1.) [936.9(f)(3)(E)(1.), 956.9(f)(3)(E)(1.)]

8 (3) Log hauling on logging roads and landings shall be limited to those which are
9 hydrologically disconnected from watercourses to the extent feasible, and exhibit a stable
10 operating surface in conformance with (b) above. Exceptions may be proposed by the RPF,
11 when locations are disclosed and justified in the THP, consistent with 14 CCR 923 (c), and
12 approved by the Director.

13 (4) Concurrent with use for log hauling, all road approaches to logging road watercourse
14 crossings shall be treated for erosion control as needed to minimize soil erosion and sediment
15 transport and to prevent significant sediment discharge to watercourses or lakes.

16 (5) Concurrent with use for log hauling, all traveled surfaces of logging roads in a WLPZ,
17 and ELZ or EEZ designated for watercourse or lake protection, shall be treated for erosion
18 control as needed to minimize soil erosion and sediment transport and to prevent significant
19 sediment discharge to watercourses or lakes.

20 (6) No timber operations shall take place during the extended wet weather period unless
21 the approved plan incorporates a complete winter period operating plan pursuant to 14 CCR §
22 914.7(b) [934.7(b), 954.7(b)] that specifically addresses, where applicable, proposed logging
23 road or landing use.

24 ~~Routine use and maintenance of roads and landings shall not take place when, due to general~~
25 ~~wet conditions, equipment cannot operate under its own power. Operations may take place~~
~~when roads and landings are generally firm and easily passable or during hard frozen~~

1 ~~conditions. Isolated wet spots on these roads or landings shall be rocked or otherwise treated to~~
2 ~~permit passage. However, operations and maintenance shall not occur when sediment~~
3 ~~discharged from landings or roads will reach watercourses or lakes in amounts deleterious to~~
4 ~~the quality and beneficial uses of water. This section shall not be construed to prohibit activities~~
5 ~~undertaken to protect the road or to reduce erosion.~~

6
7 **Amend § 923.7, 943.7, 963.7 Maintenance and Monitoring for Logging Roads and**
8 **Landings Licensed Timber Operator Responsibility for Roads and Landings**

9 The following maintenance and monitoring standards shall apply to logging roads and
10 landings:

11 (a) Logging road and landing surfaces shall be monitored and maintained during timber
12 operations and throughout the prescribed maintenance period to ensure hydrologic
13 disconnection from watercourses and lakes to the extent feasible, minimize soil erosion and
14 sediment transport, and to prevent significant sediment discharge.

15 (b) Logging roads that are used in connection with stocking activities shall be maintained
16 throughout such use, even if this extends beyond the prescribed maintenance period.

17 (c) During timber operations, road running surfaces in the logging area shall be treated as
18 necessary to prevent excessive loss of road surface materials by methods including , but not
19 limited to, rocking, watering, paving, chemically treating, or installing commercial erosion control
20 devices to manufacturer's specifications.

21 (d) Grading of logging roads or landings to obtain a drier running surface more than one time
22 before reincorporation of any resulting berms back into the road surface is prohibited.

23 (e) Drainage facilities and drainage structures, including associated necessary protective
24 structures, shall be maintained to allow free flow of water, and minimize soil erosion and slope
25 instability. Drainage facilities and structures shall be repaired, replaced, or installed as needed
to protect the quality and beneficial uses of water.

1 (f) Soil stabilization treatments on logging road or landing cuts, fills, and sidecast shall be
2 maintained as needed to reduce the potential for slope instability, minimize soil erosion and
3 sediment transport, and to prevent significant sediment discharge.

4 (g) Heavy equipment shall not be used in a WLPZ for maintenance during wet weather, except
5 in emergencies to protect the road, to reduce erosion, to protect water quality, or in response to
6 public safety needs.

7 (h) Where there is evidence of significant sediment discharge along a logging road or landing
8 used for timber operations, additional measures shall be implemented to minimize soil erosion
9 and sediment transport, and to prevent significant sediment discharge.

10 (i) The prescribed maintenance period for erosion controls on logging roads and associated
11 landings and drainage structures, including appurtenant, abandoned, and deactivated logging
12 roads and landings, shall be at least one year. The Director may prescribe a maintenance
13 period extending up to three years in accordance with 14 CCR § 1050.

14 (j) In watersheds with listed anadromous salmonids and in planning watersheds immediately
15 upstream of, and contiguous to, any watershed with listed anadromous salmonids, the
16 prescribed maintenance period for deactivated or abandoned roads shall be one year unless
17 otherwise prescribed by the Director pursuant to 14 CCR § 1050. The prescribed maintenance
18 period for logging roads and associated landings, including appurtenant roads, shall be three
19 years.

20 (k) All logging roads, including abandoned, deactivated, and appurtenant roads, landings, and
21 associated drainage structures used for timber operations shall be monitored as needed to
22 comply with 14 CCR § 1050. Monitoring inspections shall be conducted, when access is
23 feasible during the prescribed maintenance period, a sufficient number of times during the
24 extended wet weather period, particularly after large winter storm events and at least once
25 annually, to evaluate the function of drainage facilities and structures. The Department shall

1 also conduct monitoring inspections at least once during the prescribed maintenance period to
2 assess logging road and landing conditions.

3 (1) Inspections shall include checking drainage facilities and structures for evidence of
4 downcutting, plugging, overtopping, loss of function, and sediment delivery to Class I, II, or III
5 watercourses and lakes. If evidence of sediment delivery or potential sediment delivery is
6 present, and the implementation of feasible corrective measures could reduce the potential for
7 significant sediment discharge, such additional measures shall be implemented when feasible.

8 (2) Inspections conducted pursuant to California Regional Water Quality Control Board
9 requirements may be used to satisfy the inspection requirements of this section.

10 (I) In watersheds with listed anadromous salmonids, water drafting for timber operations shall:

11 (1) Comply with Fish and Game Code Section 1600, et seq. Timber operations
12 conducted under a Fish and Game Code Section 1600 Master Agreement for Timber
13 Operations that includes water drafting may provide proof of such coverage for compliance with
14 14 CCR 923.7(I).

15 (2) Describe the water drafting site conditions and proposed water drafting activity in the
16 plan, including:

17 (A) A general description of the conditions and proposed water drafting;

18 (B) The watercourse classification;

19 (C) The drafting parameters including the months the site is proposed for use;
20 estimated total volume needed per day; estimated maximum instantaneous drafting rate and
21 filling time; and disclosure of other water drafting activities in the same watershed;

22 (D) The estimated drainage area (acres) above the point of diversion;

23 (E) The estimated unimpeded streamflow, pumping rate, and drafting duration,

24 (F) a discussion of the effects on aquatic habitat downstream from the drafting
25 site(s) of single pumping operations, or multiple pumping operations at the same location, and
at other locations in the same watershed;

1 (G) A discussion of proposed alternatives and measures to prevent adverse
2 effects to fish and wildlife resources, such as reducing hose diameter; using gravity-fed tanks
3 instead of truck pumping; reducing the instantaneous or daily intake at one location; describing
4 allowances for recharge time; using other dust palliatives; and drafting water at alternative sites;

5 (H) The methods that will be used to measure source streamflow prior to the
6 water drafting operation and the conditions that will trigger streamflow to be measured during
7 the operation.

8 (3) All water drafting for timber operations are subject to each requirement below unless
9 the Department of Fish and Game modifies the requirement in the Lake or Streambed Alteration
10 agreement that authorized the drafting operation, or unless otherwise specified below:

11 (A) All intakes shall be screened to prevent impingement of juvenile fish against
12 the screen. The following requirements apply to screens and water drafting on Class I waters:

13 (i) Openings in perforated plate or woven wire mesh screens shall not
14 exceed 3/32 inches (2.38 millimeters). Slot openings in wedge wire screens shall not exceed
15 1/16 inches (1.75 millimeters).

16 (ii) The screen surface shall have at least 2.5 square feet of openings
17 submerged in water.

18 (iii) The drafting operator shall regularly inspect, clean, and maintain
19 screens to ensure proper operation whenever water is drafted.

20 (iv) The approach velocity (water moving through the screen) shall not
21 exceed 0.33 feet/second.

22 (v) The diversion rate shall not exceed 350 gallons per minute.

23 (B) Approaches and associated drainage features to drafting locations within a
24 WLPZ or channel zone shall be surfaced with rock or other suitable material to minimize
25 generation of sediment.

(C) Barriers to sediment transport, such as straw wattles, logs, straw bales or

1 sediment fences, shall be installed outside the normal high water mark to prevent sediment
2 delivery to the watercourse and limit truck encroachment.

3 (D) Water drafting trucks parked on streambeds, floodplains, or within a WLPZ
4 shall use drip pans or other devices such as adsorbent or absorbent blankets, sheet barriers or
5 other materials as needed to prevent soil and water contamination from motor oil or hydraulic
6 fluid leaks.

7 (E) Bypass flows for Class I watercourses shall be provided in volume sufficient
8 to avoid dewatering the watercourse and maintain aquatic life downstream, and shall conform to
9 the following standard:

10 (i) Bypass flows in the source stream during drafting shall be at
11 least 2 cubic feet per second.

12 (ii) Diversion rate shall not exceed 10 percent of the surface flow.

13 (iii) Pool volume reduction shall not exceed 10 percent.

14 (F) The drafting operator shall keep a log that records for each time water is
15 drafted, the date, total pumping time, pump rate, starting time, ending time, and volume
16 diverted. Logs shall be filed with the Department of Forestry and Fire Protection at the end of
17 seasonal operations and maintained with the plan record. This requirement may be modified in
18 the approved plan that covers the water drafting, but only with concurrence from the Department
19 of Fish and Game.

20 (G) Before commencing any water drafting operation, the RPF and the drafting
21 operator shall conduct a pre-operations field review to discuss the water drafting measures in
22 the plan and/or Lake or Streambed Alteration Agreement.

23 ~~The licensed timber operator who is responsible for the implementation or execution of the plan~~
24 ~~shall not be responsible for the construction and maintenance of roads and landings, unless the~~
25 ~~licensed timber operator is employed for that purpose.~~

1 **Amend § 923.8[943.8, 963.8]. Planned Abandonment and Deactivation of Logging Roads,**
2 **Watercourse Crossings, and Landings.**

3 All logging roads and landings that are proposed to be removed from the permanent road
4 network shall be abandoned. All temporary logging roads and landings that are to remain a part
5 of the permanent road network shall be deactivated annually prior to the winter period or upon
6 completion of timber operations as specified in an approved winter period operating plan
7 pursuant to 14 CCR § 914.7(b) [934.7(b), 954.7(b)]. Other logging roads and landings proposed
8 to be deactivated shall comply with the standards specified in this section. Where abandonment
9 or deactivation is required or proposed, specific measures to prevent significant sediment
10 discharge that apply the following general requirements shall be described in the plan:

11 **(a) All abandoned and deactivated logging roads and landings shall be left in a condition that**
12 **provides for long-term, maintenance-free function of drainage and erosion controls.**

13 **(b) Soil exposed by abandonment or deactivation operations shall be removed or stabilized as**
14 **needed to minimize soil erosion and sediment transport.**

15 **(c) Logging road watercourse crossings, other drainage structures, and associated fills shall be**
16 **removed and stabilized in accordance with 14 CCR § 923.9 [943.9, 963.9], subsections (p)(1)-**
17 **(4).**

18 **(d) Logging roads to be abandoned or deactivated shall be blocked prior to the winter period, or**
19 **upon completion of timber operations as specified in an approved winter period operating plan**
20 **pursuant to 14 CCR § 914.7(b) [934.7(b), 954.7(b)], so that standard production four wheel-**
21 **drive highway vehicles cannot pass the point of closure at the time of abandonment or**
22 **deactivation. If the logging road is to be abandoned, then the blockage design shall be**
23 **described in the plan.**

24 ~~Abandonment of roads, watercourse crossings and landings shall be planned and conducted in~~
25 ~~a manner which provides for permanent maintenance-free drainage, minimizes concentration of~~
~~runoff, soil erosion and slope instability, prevents unnecessary damage to soil resources,~~

1 promotes regeneration, and protects the quality and beneficial uses of water. General
2 abandonment procedures shall be applied in a manner which satisfies this standard and include
3 the following:

4 ~~(a) Blockage of roads so that standard production four wheel-drive highway vehicles cannot
5 pass the point of closure at the time of abandonment.~~

6 ~~(b) Stabilization of exposed soil on cuts, fills, or sidecast where deleterious quantities of eroded
7 surface soils may be transported in a watercourse.~~

8 ~~(c) Grading or shaping of road and landing surfaces to provide dispersal of water flow.~~

9 ~~(d) Pulling or shaping of fills or sidecast where necessary to prevent discharge of materials into
10 watercourses due to failure of cuts, fills, or sidecast.~~

11 ~~(e) Removal of watercourse crossings, other drainage structures, and associated fills in
12 accordance with 14 CCR 923.3(d). Where it is not feasible to remove drainage structures and
13 associated fills, the fill shall be excavated to provide an overflow channel which will minimize
14 erosion of fill and prevent diversion of overflow along the road should the drainage structure
15 become plugged.~~

16 ~~The Director may approve an exception to a requirement set forth in (b) through (e) above when
17 such exceptions are explained and justified in the THP and the exception would provide for the
18 protection of the beneficial uses of water or control erosion to a standard at least equal to that
19 which would result from the application of the standard rule.~~

21 ~~**Amend § 923.9 [943.9, 963.9]. Roads and Landings in Watersheds with Listed**~~

22 ~~**Anadromous Salmonids. [All Districts] Watercourse Crossings [All Districts]**~~

23 ~~Watercourse crossing drainage structures on logging roads shall be planned, constructed,~~
24 ~~reconstructed, and maintained or removed according to the standards provided in this rule~~
25 ~~section.~~

1 (a) The planning for and use of logging road watercourse crossings shall include the evaluation
2 and documentation of significant existing and potential erosion sites consistent with 14 CCR §
3 923.1(e) [943.1(e), 963.1(e)].

4 (b) The number of crossings shall be kept to a feasible minimum. Existing logging road
5 watercourse crossing locations shall be utilized where feasible and appropriate.

6 (c) All new drainage structures and facilities on watercourses that support fish or listed aquatic
7 species shall allow for unrestricted passage of all life stages that may be present, and allow for
8 the natural movement of bedload to form a continuous bed through the crossing. Such structures
9 and facilities shall be fully described in the plan in sufficient clarity and detail to allow evaluation
10 by the review team and the public, provide direction to the LTO for implementation, and provide
11 enforceable standards for the inspector.

12 (d) In watersheds with listed anadromous salmonids, a description of all existing permanent
13 Class I watercourse crossings shall be provided, where fish are always or seasonally present or
14 where fish passage is restorable. Where it is determined that current crossing conditions may
15 be adversely affecting fish passage at any life stage, the RPF shall disclose such conditions in
16 the plan and propose measures, if feasible, to address these conditions subject to the Director's
17 review and determination.

18 (e) The location of all new permanent constructed and reconstructed, and temporary logging
19 road watercourse crossings, including those crossings to be abandoned or deactivated, shall be
20 shown on a map. If the structure is a culvert intended for permanent use, the minimum
21 diameter of the culvert and the method(s) used to determine the culvert diameter shall be
22 specified in the plan.

23 (1) The location of all logging road watercourse crossings to be constructed or
24 reconstructed shall be flagged or otherwise identified on the ground prior to the pre-harvest
25 inspection, if necessary, or prior to logging road watercourse crossing construction or
reconstruction. Exceptions may be explained and justified in the plan and agreed to by the

1 Director if flagging is unnecessary as a substantial aid to examining possible significant adverse
2 effects of the crossing location on the factors listed under 14 CCR § 923(b) [943(b), 963(b)].

3 (f) All permanent watercourse crossings that are constructed or reconstructed shall
4 accommodate the estimated 100-year flood flow, including debris and sediment loads.

5 (g) All culverts used for new and replacement logging road watercourse crossings shall be
6 installed at or as close as practical and feasible to the natural watercourse grade. Culverts shall
7 be installed in alignment with the watercourse channel to the extent feasible, and of the
8 appropriate length to prevent fill erosion.

9 (h) Logging road watercourse crossings shall not discharge water onto erodible fill or other
10 erodible material without the installation of energy dissipaters and other necessary protective
11 structures.

12 (i) Fills for constructed and reconstructed logging road watercourse crossings shall be
13 thoroughly compacted in approximately one-foot lifts during installation. The face of crossing
14 fills shall be no greater than 65 percent (1.5:1, horizontal to vertical). Excavated material and cut
15 banks resulting from construction or reconstruction which has access to a watercourse shall be
16 sloped back from the channel to prevent slumping, to minimize soil erosion, and to prevent
17 significant sediment discharge.

18 (j) Critical dips shall be incorporated into the construction or reconstruction of logging road
19 watercourse crossings utilizing culverts, except where diversion of overflow is addressed by
20 other methods stated in the plan.

21 (k) Watercourse crossings and associated fills and approaches shall be constructed and
22 maintained to prevent diversion of stream overflow down the road, and to minimize fill erosion
23 should the drainage structure become obstructed. Methods to mitigate or address diversion of
24 stream overflow at logging road watercourse crossings shall be stated in the plan.

25 (l) Any necessary protective structures associated with logging road watercourse crossings
such as wing walls, rock armored headwalls, and downspouts shall be adequately sized to

1 transmit runoff, minimize erosion of crossing fills, and prevent significant sediment discharge.

2 Rock used to stabilize the outlets of crossings shall be adequately sized to resist mobilization,
3 with the range of required rock dimensions described in the plan.

4 **(m)** The following drainage standards shall apply to logging road watercourse crossings:

5 **(1)** Adequate surface drainage at logging road watercourse crossings shall be provided
6 through the use of logging road surface shaping in combination with the installation of drainage
7 facilities, ditch drains, or other necessary protective structures to hydrologically disconnect the
8 road from the crossing to the extent feasible.

9 **(2)** Consistent with 14 CCR § 923.5(a)-(i) [943.5(a)-(i), 963.5(a)-(i)], drainage facilities
10 and ditch drains shall be installed adjacent to logging road watercourse crossings, as needed, to
11 hydrologically disconnect to the extent feasible the logging road approach from the crossing, to
12 minimize soil erosion and sediment transport, and to prevent significant sediment discharge
13 during and upon completion of timber operations.

14 **(3)** Drainage structures and facilities installed adjacent to logging road watercourse
15 crossings shall be located to avoid discharging concentrated runoff onto fills, erodible soils,
16 unstable areas, and connected headwall swales to the extent feasible.

17 **(n)** Where a significant volume of sediment is stored upstream from a logging road watercourse
18 crossing that is proposed to be reconstructed or removed, the stored sediment shall be removed
19 or stabilized, to the extent feasible, as described in the plan and in conformance with the
20 conditions of required DFG 1600 agreements, where applicable.

21 **(o)** Where crossing fills over culverts are large, or where logging road watercourse crossing
22 drainage structures and erosion control features historically have a high failure rate, such
23 drainage structures and erosion control features shall be oversized, designed for low
24 maintenance, reinforced, or removed before the completion of timber operations or as specified
25 in the plan.

1 (p) All logging road watercourse crossings that are proposed by the plan submitter to be
2 removed, including temporary crossings and those along abandoned or deactivated roads, shall
3 be removed as described in the plan and shall apply the following standards:

4 (1) Fills shall be excavated to form a channel that is as close as feasible to the natural
5 watercourse grade and orientation, and that is wider than the natural channel as observed
6 upstream and downstream of the logging road watercourse crossing to be removed.

7 (2) The excavated material and any resulting cut bank shall be no greater than 65
8 percent (1.5:1, horizontal to vertical) from the outside edge of the constructed channel to
9 prevent slumping, and to minimize soil erosion and sediment transport, and to prevent
10 significant sediment discharge. Exposed soil located between the watercourse crossing and the
11 nearest adjacent drainage facility or hydrologic divide, whichever is closer, including cut banks
12 and excavated material, shall be stabilized by seeding, mulching, rock armoring, replanting, or
13 other suitable treatment to prevent soil erosion and significant sediment discharge.

14 (3) Where it is not feasible to remove a logging road watercourse crossing or its
15 associated fill to the above standards, the plan shall identify how soil erosion and significant
16 sediment discharge will be prevented.

17 (4) All logging road watercourse crossings proposed for removal shall be removed upon
18 completion of use, prior to the winter period or as specified in the applicable DFG 1600
19 agreement, whichever is earlier, or as otherwise specified in the plan.

20 (q) Logging road watercourse crossings shall not be constructed or reconstructed under
21 saturated soil conditions or when such activities could result in significant sediment discharge.

22 (r) Temporary logging road watercourse crossings shall be removed and stabilized prior to the
23 winter period or as specified in the plan.

24 (s) In watersheds with listed anadromous salmonids and in planning watersheds immediately
25 upstream of, and contiguous to, any watershed with listed anadromous salmonids, where
construction or reconstruction is proposed during the extended wet weather period, no timber

1 operations shall take place unless the approved plan incorporates a complete winter period
2 operating plan pursuant to 14 CCR § 914.7(b) [934.7(b), 954.7(b)] that specifically addresses
3 such construction or reconstruction.

4 **(t) The following stabilization standards shall apply to logging road watercourse crossings:**

5 **(1) Soil stabilization measures shall be described in the plan and may include, but are**
6 **not limited to, removal, armoring with rip-rap, replanting, mulching, seeding, installing**
7 **commercial erosion control devices to manufacturer's specifications, or chemical stabilizers.**

8 **(2) Bare soil on fills or sidecast associated with logging road watercourse crossings that**
9 **are created or exposed by timber operations shall be stabilized to the extent necessary to**
10 **minimize soil erosion and sediment transport and to prevent significant sediment discharge.**

11 **Erosion control measures for the traveled surface of roads and landing surfaces are specified in**
12 **14 CCR §§ 923.5 [943.5, 963.5] and 923.7 [943.7, 963.7]. Sites to be stabilized include, but are**
13 **not limited to, sidecast or fill exceeding 20 feet in slope distance from the outside edge of the**
14 **road surface at the logging road watercourse crossing.**

15 **(3) Soil stabilization treatments shall be in place upon completion of operations for the**
16 **year of use or prior to the extended wet weather period, whichever comes first. An exception is**
17 **that bare areas created during the extended wet weather period shall be treated prior to the**
18 **start of rain that generates overland flow, or within 10 days, whichever is sooner, or as agreed**
19 **to by the Director.**

20 **(4) In watersheds with listed anadromous salmonids and in planning watersheds**
21 **immediately upstream of, and contiguous to, any watershed with listed anadromous salmonids,**
22 **treatments to stabilize soils, minimize soil erosion, and prevent significant sediment discharge**
23 **within the WLPZ and within any ELZ or EEZ designated for watercourse or lake protection, shall**
24 **be described in the plan as follows:**

25 **(A) In addition to the requirements of 14 CCR § 923.9(p)(1)-(3) [943.9(p)(1)-(3),**
963.9(p)(1)-(3)] , soil stabilization is required for the following:

1 (i) Areas exceeding 100 continuous square feet where timber operations
2 have exposed bare soil.

3 (ii) Disturbed logging road watercourse crossing cut banks and fills, and

4 (iii) Any other area of disturbed soil that threatens to cause significant
5 sediment discharge.

6 (B) Where straw mulch is used, the minimum straw coverage shall be 90
7 percent, and any treated area that has been reused or has less than 90 percent surface
8 cover shall be treated again by the end of timber operations.

9 (C) Where slash mulch is applied, slash coverage in contact with the ground
10 surface shall be a minimum of 75 percent.

11 (D) For areas disturbed outside the extended wet weather period, treatment shall
12 be completed prior to the start of any rain that causes overland flow across or along the
13 disturbed surface that could result in significant sediment discharge.

14 (E) For areas disturbed during the extended wet weather period, treatment shall
15 be completed prior to any day for which a chance of rain of 30 percent or greater is
16 forecast by the National Weather Service or within 10 days of disturbance, whichever is
17 earlier.

18 (u) Logging road watercourse crossings shall be monitored and maintained during timber
19 operations and throughout the prescribed maintenance period as needed, to comply with 14
20 CCR § 1050. The prescribed maintenance period is specified in 14 CCR § 923.7(i)-(j) [943.7(i)-
21 (j), 963.7(i)-(j)]. Monitoring inspections shall be conducted, when access is feasible during the
22 prescribed maintenance period, a sufficient number of times during the extended wet weather
23 period, particularly after large winter storm events and at least once annually, to evaluate
24 watercourse crossing function. The Department shall also conduct monitoring inspections at
25 least once during the prescribed maintenance period to assess watercourse crossing
conditions.

1 (1) Inspections shall include checking watercourse crossings for evidence of
2 downcutting, plugging, overtopping, loss of function, and sediment delivery to Class I, II, or III
3 watercourses and lakes. If evidence of sediment delivery or potential sediment delivery is
4 present, and the implementation of feasible corrective measures could reduce the potential for
5 significant sediment discharge, such additional measures shall be implemented when feasible.

6 (2) Inspections conducted pursuant to California Regional Water Quality Control Board
7 requirements may be used to satisfy the inspection requirements of this section.

8 (v) Logging road watercourse crossings shall be maintained as designed, constructed, and
9 reconstructed during timber operations and throughout the prescribed maintenance period.

10 Crossings used in connection with stocking activities shall be maintained throughout such use,
11 even if this extends beyond the prescribed maintenance period.

12 ~~In addition to all other district Forest Practice Rules, the following requirements shall apply in~~
13 ~~any planning watershed with listed anadromous salmonids:~~

14 ~~(a) Where logging road or landing construction or reconstruction is proposed, the plan shall~~
15 ~~state the locations of, and specifications for, logging road or landing abandonment or other~~
16 ~~mitigation measures to minimize the adverse effects of long-term site occupancy of the~~
17 ~~transportation system within the watershed.~~

18 ~~(b) Unless prohibited by existing contracts with the U.S.D.A. Forest Service or other federal~~
19 ~~agency, new and reconstructed logging roads shall be no wider than a single-lane compatible~~
20 ~~with the largest type of equipment specified for use on the road, with adequate turnouts~~
21 ~~provided as required for safety. The maximum width of these roads shall be specified in the~~
22 ~~plan. These roads shall be outsloped where feasible and drained with water breaks or rolling~~
23 ~~dips (where the road grade is inclined at 7 percent or less), in conformance with other applicable~~
24 ~~Forest Practice Rules.~~

25 ~~(c) The following shall apply on slopes greater than 50% that have access to a watercourse or~~
~~lake:~~

1 ~~(1) Specific provisions of construction shall be identified and described for all new roads.~~

2 ~~(2) Where cutbank stability is not an issue, roads may be constructed as a full-benched~~
3 ~~cut (no fill). Spoils not utilized in road construction shall be disposed of in stable areas with less~~
4 ~~than 30 percent slope and outside of any WLPZ, EEZ, or ELZ designated for watercourse or~~
5 ~~lake protection. The Director, with concurrence from other responsible agencies, may waive~~
6 ~~inclusion of these measures where the RPF can show that slope depressions and other natural~~
7 ~~retention and detentions feature are sufficient to control overland transport of eroded material.~~

8 ~~(3) Logging roads may be constructed with balanced cuts and fills: if~~

9 ~~(A) Properly engineered, or~~

10 ~~(B) Fills are removed and the slopes recontoured prior to the winter period.~~

11 ~~(d) In addition to the provisions listed under 14 CCR § 923.1 [943.1, 963.1], subsection (e), all~~
12 ~~permanent or seasonal logging roads with a grade of 15% or greater that extend 500 continuous~~
13 ~~feet or more shall have specific erosion control measures stated in the plan.~~

14 ~~(e) Where logging road networks are remote or are located where the landscape is unstable,~~
15 ~~where crossing fills over culverts are large, or where logging road watercourse crossing~~
16 ~~drainage structures and erosion control features historically have a high failure rate, drainage~~
17 ~~structures and erosion control features shall be oversized, designed for low maintenance,~~
18 ~~reinforced, or removed before the completion of the timber operation. The method of analysis~~
19 ~~and the design for crossing protection shall be included in the plan.~~

20 ~~(f) Except when expressly required by 14 CCR § 923.9 [943.9, 963.9], subsections (f)(1)-(5)~~
21 ~~below, the provisions of 14 CCR § 923.9 [943.9, 963.9] shall not apply to a plan that is subject~~
22 ~~to:~~

23 ~~(1) a valid incidental take permit issued by DFG pursuant to Section 2081(b) of the Fish~~
24 ~~and Game Code that addresses anadromous salmonid protection; or~~

1 ~~(2) a federal incidental take statement or incidental take permit that addresses~~
2 ~~anadromous salmonid protection, for which a consistency determination has been made~~
3 ~~pursuant to Section 2080.1 of the Fish and Game Code; or~~

4 ~~(3) a valid natural community conservation plan that addresses anadromous salmonid~~
5 ~~protection approved by DFG under section 2835 of the Fish and Game Code; or~~

6 ~~(4) a valid Habitat Conservation Plan that addresses anadromous salmonid protection,~~
7 ~~approved under Section 10 of the federal Endangered Species Act of 1973; or~~

8 ~~(5) project revisions, guidelines, or take avoidance measures pursuant to a~~
9 ~~memorandum of understanding or a planning agreement entered into between the plan~~
10 ~~submitter and DFG in preparation of obtaining a natural community conservation plan that~~
11 ~~addresses anadromous salmonid protection.~~

12
13 **Repeal 923.9.1 [943.9.1]. Measures for Roads and Landings in Watersheds with Coho**
14 **Salmon.**

15 In addition to all other district Forest Practice Rules, the regulations in 14 CCR §§ 923.3 [949.3]
16 and 923.9 [943.9] as amended and effective on January 1, 2010 shall apply in any planning
17 watershed with coho salmon.

18
19 **Amend § 1034. Contents of Plan.**

20 ******(o) The classification and approximate length of each of the following logging road**
21 **segment categories: constructed, reconstructed, and abandoned** Explanation and location of
22 ~~new roads wider than single lane with turnouts.~~

23 ******(x)**On titled USGS (if available) or equivalent topographic maps of a scale not less
24 than 2" to the mile, the information in subsections (1-4)(A), (B) and (E) ~~((E) for sites within the~~
25 ~~harvest area), (8), (9), and (11-13) shall be clearly shown. Additional maps, which may be~~
~~topographic or planimetric, may be used to provide the information required in the other~~

1 subsections, ~~to~~ to show specific details, and to improve map clarity. The appurtenant roads
2 referenced in subsection (4)(C), (D), and (E) ((E) for those sites not within the harvest area) may
3 be shown on a map which may be planimetric with a scale as small as one-half inch equals one
4 mile. Color coding shall not be used. A legend shall be included indicating the meaning of the
5 symbols used. See the district rules for the appropriate minimum mapping acreages.

6 **(1)-(3) [No change]**

7 **(4) Location of all roads to be used for, or potentially impacted by, timber operations.**

8 This shall include: ~~Location of public roads and those private roads to be used for timber~~
9 ~~operations within the plan area, and private roads appurtenant to the timber operations where~~
10 ~~such roads are under the ownership or control of the timber owner, timberland owner, timber~~
11 ~~operator, or submitter of the plan, and classification of all proposed and existing logging roads~~
12 ~~as permanent, seasonal, or temporary roads.~~

13 **(A) The classification of all roads as permanent, seasonal, temporary, or**
14 **proposed for abandonment.**

15 **(B) Roads and landings located in watercourses, lakes, WLPZs, marshes,**
16 **wet meadows, or other wet areas, other than at road watercourse crossings.**

17 **(C) Appurtenant roads that provide access to rock pits and water drafting sites,**
18 **and the location of water drafting sites.**

19 **(D) Public roads within one-quarter (1/4) mile of the harvest area.**

20 **(E) The location of significant existing or potential erosion sites on all roads and**
21 **landings pursuant to 14 CCR 923.1(e).**

22 **(5) ~~Probable location of proposed and existing landings in the watercourse and lake~~**
23 **~~protection zone, and landings outside the zone that are greater than 1/4 acre in size or whose~~**
24 **~~construction involves substantial excavation. The following shall be mapped at the scale~~**
25 **~~required under subsection (x) for all constructed and reconstructed logging roads and landings,~~**
unless otherwise described:

1 (A) Location of logging road grades greater than 15 percent for over 200
2 continuous feet or logging road grades exceeding 20 percent.

3 (B) Location of road failures on existing logging roads to be reconstructed.

4 (C) Location of logging roads across and landings on unstable areas or
5 connected headwall swales.

6 (D) Location of landings that require substantial excavation and landings in
7 excess of one-quarter acre in size.

8 (E) Location of excess material disposal sites on slopes greater than 40
9 percent or on active unstable areas.

10 (F) Location of logging roads and landings across slopes greater than 65
11 percent for 100 lineal feet or more.

12 (G) Location of logging roads and landings across slopes greater than 50
13 percent for 100 lineal feet or more within 100 feet of the boundary of a WLPZ that drains toward
14 the zoned watercourse or lake.

15 (6) The location of all new permanent constructed and reconstructed, and
16 temporary logging road watercourse crossings, including those crossings to be abandoned or
17 deactivated, shall be shown on a map. :

18 ~~(6) Road failures on existing roads to be reconstructed.~~

19 (7) Location of all tractor road watercourse crossings of classified watercourses
20 except temporary crossings of Class III watercourses without flowing water during timber
21 operations at that crossing.

22 (8) [No change]

23 (9) Location of watercourses and lakes with Class I, II, III, or IV waters.

24 (10) [No change]*****

1 ***** (16) Location of any in lieu use of heavy equipment and location of tractor
2 roads ~~other than crossings in the~~ watercourses, lakes WLPZs, marshes, wet meadows, and
3 other wet areas.

4 ~~(17)~~—Location of any new or reconstructed road segment(s) that exceed an average
5 15% grade for over 200 feet.

6 **(aa)- [No change]**

7 **(bb)** Winter period operating plan where appropriate or required.

8 **(cc)** Explanation and justification for use of watercourses, marshes, wet meadows, and other
9 wet areas as ~~landings, roads, or skid trails~~ tractor roads.

10 **(dd)-(ee) [No change]**

11 ~~(ff)~~—Explanation and justification for landings that exceed the maximum size specified in the
12 rules.

13 ~~(gg) (ff)~~Any other information required by the rules or the Act to be included in the plan. ~~The~~
14 ~~district rules provide for exceptions and alternatives to standard requirements that require~~
15 ~~inclusion of information in the THP.~~

16 ~~(hh)~~—Where roads, watercourse crossings, and associated landings in the logging area will be
17 abandoned, the methods for abandonment shall be described.

18 ~~(ii)~~—On a map complying with subsection 1034(x), the locations and classifications of roads,
19 ~~watercourse crossings, and landings to be abandoned shall be shown.~~

20 ~~(jj)(gg)~~ A general description of physical conditions at the plan site, including general soils and
21 topography information, vegetation and stand conditions, and watershed and stream conditions.

22
23 **Amend 1051.1. Contents of Modified THP**

24 A plan submitted under ~~section~~ 14 CCR § 1051 above shall contain all the applicable provisions
25 of 14 CCR § 1034 except the following: (o), (x)(7), (z), (cc), (dd), (ee), and the RPF shall:*****

1 **Amend 1090.5 Contents of NTMP**

2 (w) On a USGS quadrangle or equivalent topographical map of a scale not less than 2" to
3 the mile, the following information shall be clearly provided. Additional maps may be required to
4 show specific details, and may be planimetric. Color coding shall not be used. A legend shall
5 be included indicating the meaning of the symbols used. See the district rules for the
6 appropriate minimum mapping acreages.

7 **(1)-(3) [No change]**

8 **(4) Location of all roads to be used for, or potentially impacted by, timber operations.**

9 This shall include:

10 **(A) The classification of all roads as permanent, seasonal, temporary, or**
11 **proposed for abandonment.**

12 **(B) Roads and landings located in watercourses, lakes, WLPZs, marshes,**
13 **wet meadows, or other wet areas, other than at road watercourse crossings.**

14 **(C) Roads that provide access to rock pits and water drafting sites, and the**
15 **location of water drafting sites.**

16 **(D) Public roads within one-quarter (¼) mile of the harvest area.**

17 **(E) The location of significant existing or potential erosion sites on all roads**
18 **and landings pursuant to 14 CCR 923.1(e). ~~Location of public roads within the plan area, and~~**
19 **~~private roads appurtenant to the timber operations where such roads are under the ownership~~**
20 **~~or control of the timberland owner and are contiguous with the plan area, and classification of all~~**
21 **~~proposed and existing logging roads as permanent, seasonal, or temporary roads.~~**

22 **(5)-14) [No change]**

23 **(x)-(ff) [No change]**

24 **~~(gg) Where roads, watercourse crossings, and associated landings in the logging area will be~~**
25 **~~abandoned, the methods for abandonment shall be described.~~**

1 ~~(hh)~~(gg) On a map complying with ~~subsection 14 CCR § 1090.6(x)~~ 1090.5(w), the
2 locations and classifications of logging roads, logging road watercourse crossings, and landings
3 to be abandoned or deactivated shall be shown.

4 ~~(ii)~~(hh) A certification by the RPF preparing the plan that he, she, or a designee
5 personally inspected the area.

7 **Amend 1090.7 Notice of Timber Operations Content**

8 *******(n)** On a USGS quadrangle or equivalent map of a scale not less than 2" to the mile, the
9 following information reflecting current conditions pertinent to the Notice of Operations shall be
10 clearly provided. Additional maps may be required to show specific details, and may be
11 planimetric. Color coding shall not be used. A legend shall be included indicating the meaning
12 of the symbols used. See the district rules for the appropriate minimum mapping acreages.

13 **(1)-(3) [No change]**

14 **(4)** Location of public roads within the Notice area, and private roads appurtenant to
15 the timber operations where such roads are under the ownership or control of the timberland
16 owner, and are contiguous with the Notice area, and classification of all proposed and existing
17 logging roads as permanent, seasonal, or temporary roads.

18 **(5)-(11) [No change]**

20 **Amend 1092.09 PTHP Contents**

21 **(a) – (k)** No change

22 **(l)** On a titled USGS quadrangle or equivalent topographic map of a scale not less than 2" to the
23 mile, the information in subsections ~~(4-5)~~ (1)-(5)(A), (6)(A)-(6)(K), if applicable, (7)(A)-(B), and
24 (7-11) shall be clearly shown. Additional maps, which may be topographic or planimetric, may
25 be used to provide the information required in other subsections or show specific details, and to
improve map clarity. The appurtenant roads referenced in subsection (5) may be shown on a

1 map which may be planimetric with a scale as small as one-half inch equals one mile. Color
2 coding shall not be used. A legend shall be included indicating the meaning of the symbols
3 used. See the district rules for the appropriate minimum mapping acreage.

4 **(1)-(4) [No change]**

5 **(5)** ~~Location of public roads within the PTHP, and private roads appurtenant to the~~
6 ~~timber operations where such roads are under the ownership or control of the timber owner,~~
7 ~~timberland owner or timber operator, and classification of all proposed and existing logging~~
8 ~~roads as permanent, seasonal, or temporary roads. The following logging road- and landing-~~
9 ~~related features shall be shown on a map of the appropriate type and scale as described in~~
10 ~~subsection (l) above:~~

11 **(A)** Location of all roads to be used for, or potentially impacted by, timber
12 operations. This shall include:

13 1. The classification of all roads as permanent, seasonal, temporary,
14 or proposed for abandonment.

15 2. Roads and landings located in watercourses, lakes, WLPZs,
16 marshes, wet meadows, or other wet areas, other than at road watercourse crossings.

17 3. Roads that provide access to rock pits and water drafting sites,
18 and the location of water drafting sites.

19 4. Public roads within one-quarter (¼) mile of the harvest area.

20 5. The location of significant existing or potential erosion sites on all
21 roads and landings pursuant to 14 CCR 923.1(e).

22 **(6)** The following shall be mapped at the appropriate scale required under
23 subsection (l), whichever is applicable, for all constructed and reconstructed logging roads and
24 landings, unless otherwise noted:

25 **(A)** Location of logging road grades greater than 15 percent for over 200
continuous feet or logging road grades greater than 20 percent.

1 (B) Location of road failures on existing roads to be reconstructed.

2 (C) Location of logging roads across or landings on unstable areas or
3 connected headwall swales.

4 (D) Location of landings that require substantial excavation and landings in
5 excess of one-quarter acre in size.

6 (E) Location of excess material disposal sites on slopes greater than 40
7 percent or on active unstable areas.

8 (F) Location of logging roads and landings across slopes greater than than
9 65 percent for 100 lineal feet or more.

10 (G) Location of logging roads and landings across slopes greater than 50
11 percent for 100 lineal feet or more within 100 feet of the boundary of a WLPZ that drains toward
12 the zoned watercourse or lake.

13 ~~(7)(6) Location of proposed and existing landings in the watercourse and lake~~
14 ~~protection zone, and landings outside the zone that are greater than 1/4 acre in size or whose~~
15 ~~construction involves substantial excavation.~~ The location of all new permanent constructed and
16 reconstructed, and temporary logging road watercourse crossings, including those crossings to
17 be abandoned or deactivated, shall be shown on a map. This requirement may be met by
18 depicting the intersection of a logging road and a watercourse.

19 ~~(7) Road failures on existing roads to be reconstructed.~~

20 (8) Location of all tractor road watercourse crossings of classified watercourses
21 except temporary crossings of class III watercourses without flowing water during timber
22 operations at that crossing.

23 (9) [No change]

24 (10) Location of watercourses and lakes with Class I, II, III or IV waters.

25 (11) [No change]

1 **Amend § 1093.2. Contents of Road Management Plan.**

2 The Road Management Plan shall, at a minimum, contain the following information:*****

3 *******(3)** The operational element shall, at a minimum, address proposed road
4 management operations, stated time frames for actions, clear lines of responsibility for
5 implementation, and schedules to be implemented in a plan, including:

6 **(A)** A road construction, reconstruction and use component to ensure that
7 operations occur on a stable operating surface, consistent with 14 CCR 923.6 ~~that does not~~
8 ~~produce sediment in quantities that may cause a visible increase in turbidity of downstream~~
9 ~~waters in receiving Class I, II, III or IV waters or would violate Water Quality Requirements.~~ This
10 component shall include, at a minimum, restrictions for wet weather operations, surfacing
11 objectives, and provisions for water drafting.*****

12
13 **Amend § 1104.1. Conversion Exemptions.**

14 Timber operations conducted under this subsection shall be exempt from conversion permit
15 and timber harvesting plan requirements of this article*****

16 *******(E)** Timber operations may be conducted during the winter period. Tractor
17 operations in the winter period are allowed under any of the following conditions:

18 1. During dry, rainless periods but shall not be conducted on saturated soil
19 conditions that may produce significant sediment discharge. ~~sediment in quantities sufficient to~~
20 ~~cause a visible increase in turbidity of downstream waters in receiving Class I, II, III or IV waters~~
21 ~~or that violate Water Quality Requirements.~~ Erosion control structures shall be installed on all
22 constructed skid trails and tractor roads prior to sunset if the National Weather Service forecast
23 is a "chance" (30% or more) of rain within the next 24 hours.*****

24
25 End as of 08/13/13

1 **BOARD OF FORESTRY TECHNICAL RULE ADDENDUM NO. 5**

2
3 **GUIDANCE ON HYDROLOGIC DISCONNECTION, ROAD DRAINAGE,**
4 **MINIMIZATION OF DIVERSION POTENTIAL, AND HIGH RISK CROSSINGS**

5
6 **Purpose**

7 The purpose of this technical rule addendum is to provide guidance to Registered
8 Professional Foresters (RPFs), Licensed Timber Operators (LTOs), Timberland
9 Owners, and agency personnel on hydrologic disconnection of road segments and
10 logging road drainage, as required by the Forest Practice Rules pursuant to 14 CCR §
11 923 et seq. [943 et seq., 963 et seq.]. Logging roads cannot be completely
12 disconnected from watercourses in all locations. This addendum provides assistance in
13 understanding where disconnection is necessary and where site-specific field
14 observations indicate that key areas and problem indicators combine to result in
15 significant existing or potential erosion sites. The information contained herein is
16 designed to be integrated with site-specific evaluation of logging road conditions in the
17 field.

18
19 Part I of this addendum presents an introduction to the concept of hydrologic
20 disconnection, a method to evaluate existing hydrologic connectivity, and treatment
21 measures available to achieve hydrologic disconnection. Part II contains guidance on
22 the appropriate location of drainage facilities and structures, installation of energy
23 dissipators, road surface outsloping, and placement of rolling dips. Part III describes
24 diversion potential at watercourse crossings and the importance of critical dip
25 installation. Part IV describes crossings with higher risk of failure and potential

1 approaches that can be used to reduce the risk of catastrophic failure. Part V concludes
2 with a table and several figures that illustrate the concepts discussed in the text of the
3 addendum.

4

5 **I. Hydrologic Disconnection**

6 As defined in 14 CCR § 895.1, hydrologic disconnection means the removal of
7 direct routes of drainage or overland flow of road runoff to a watercourse or lake. The
8 goal of hydrologic disconnection is to minimize sediment delivery and hydrologic change
9 derived from road runoff being routed to a watercourse (Refer to Figure 1). Hydrologic
10 disconnection is achieved by creating a road surface and drainage configuration that
11 directs water to discharge from the road in a location where it is unlikely to directly flow
12 into a watercourse. Hydrologic disconnection can be accomplished by directing road
13 runoff onto effective filter strips. Filter strips should have high infiltration capacity and
14 dense vegetation and/or obstructions (e.g., woody debris, slash) to dissipate energy,
15 facilitate percolation, and resist or prevent erosion and channelization. Hydrologic
16 connectivity increases the potential for the road segment to deliver road-derived
17 sediment and road chemicals, including spills, to a watercourse. When roads are
18 connected to watercourses, this effectively increases the drainage density of the
19 watershed, producing hydrologic changes that can alter the magnitude and frequency of
20 runoff delivery to watercourses. The proportion of road prisms that are hydrologically
21 connected is strongly controlled by road location, road design, road maintenance, local
22 topography, geology, and factors that control the amount of road runoff (e.g., the
23 amount of annual precipitation).

1 Hydrologically connected roads can deliver water and sediment via inside ditches that
2 drain to a watercourse crossing; by a connected road drainage structure or facility (i.e.,
3 ditch drain culvert, rolling dip, waterbreak, or lead-off inside ditch that delivers runoff to a
4 watercourse channel); or by direct runoff from the road running surface to a watercourse
5 at road crossings (Refer to Figure 1). **In the western U.S., road-watercourse**
6 **crossings account for the majority of the connected road length,** followed by
7 gullies formed by concentrated runoff at drainage structure or facility outlets. Evidence
8 of connection below a road drainage structure or facility is provided by: (1) indication of
9 surface flow between the drainage structure outlet and a defined channel or a flood
10 prone area; (2) a channel that extends from a road drainage structure outlet to the high
11 water line of a defined channel or a flood prone area; (3) a sediment deposit that
12 reaches the high water line of a defined channel or a flood prone area; (4) observation
13 of turbid water reaching the watercourse during runoff events; or (5) indications of
14 channel widening and/or incision below a drainage structure resulting from increases in
15 flow volumes.

16
17 Primary mechanisms for decreasing hydrologic connectivity are: (1) installation of a
18 “disconnecting” drainage facility or structure close to the watercourse crossing; (2)
19 increasing the frequency of ditch drain (relief) culvert spacing for roads with inside
20 ditches; (3) converting crowned, or insloped roads with inside ditches, to outsloped
21 roads with rolling dips; (4) removing or breaching outside berms on crowned or
22 outsloped roads to facilitate effective drainage; (5) applying treatments to dissipate
23 energy, disperse flows, and minimize erosion at road drainage outlets not connected to
24 watercourses; and (6) avoiding concentration of flows onto unstable areas. In
25 particular, the distance between a watercourse crossing and the first upslope

1 adequately functioning and sized road drainage facility or structure is of high importance
2 because this distance has a large influence on the volume of water and sediment
3 delivered to a watercourse.

4
5 Not all road segments are hydrologically connected and complete hydrologic
6 disconnection is not possible for most roads. For example, insloped road segments
7 with an inside ditch will generally include a segment that is connected between the
8 watercourse and first road drainage facility or structure located up-grade from the
9 watercourse crossing (Refer to Figure 2). The likelihood of connectivity generally
10 decreases rapidly as the distance between the road and the watercourse increases.

11 Low delivery potential roads also include road segments on flat terrain that do not
12 intersect watercourse channels. For all existing road segments where hydrologic
13 connection may be present, 14 CCR § 923.1(e) [943.1(e), 963.1(e)] requires that an
14 evaluation be conducted to identify which segments need to be disconnected and how
15 the disconnection will occur.

16 17 **A. Key Areas to Evaluate for Hydrologic Connectivity**

18 When evaluating the hydrologic connectivity of logging roads, particular attention should
19 be devoted to identifying road segments with a high number of watercourse crossings
20 and those located close to watercourses (e.g., <200 feet). Key areas to consider in this
21 context include, but are not limited to:

- 22
- 23 • Road segments with road drainage structure or facility outlets near watercourses.
- 24 • Insloped or crowned road segments with inside ditches.
- 25 • Crowned or outsloped road segments with outside berms.

- 1 • Steep road or ditch grades (e.g., > 7 percent).
- 2 • Roads on steep hillslope gradients (e.g., > 40 percent).
- 3 • Roads located on lower hillslope positions (as opposed to mid-slope and upper
- 4 hillslope positions).
- 5 • Throughcut and incised road segments that are difficult to adequately drain.
- 6 • Areas with relatively high hillslope instability (e.g., Franciscan mélange terrain).
- 7 • Areas with high precipitation amounts and intensity, and/or high levels of
- 8 snowmelt runoff (e.g., transient and seasonal rain-on-snow zone).
- 9 • Road segments with surfaces prone to erosion (e.g., non-cohesive soils such as
- 10 decomposed granitic soils) and/or significant rutting from intensive use.
- 11 • Road segments with wet weather use.
- 12 • Areas with little surface roughness or vegetative cover (e.g., areas recently
- 13 burned), or compacted soils with low infiltration capacities.
- 14 • Unsurfaced roads that are graded on a regular basis.
- 15 • Inside ditches that are graded on a regular basis.
- 16 • Roads with high traffic volumes (e.g., primary roads in a road network, as
- 17 opposed to secondary, low-use roads).
- 18 • Roads with maintenance issues (e.g., road segments with damaged or plugged
- 19 drainage structures) and/or limitations regarding ownership or control (e.g., public
- 20 roads, private non-appurtenant roads, roads with unauthorized use).

21 **B. Indicators of Significant Existing or Potential Problems**

22 Indicators of significant existing or potential problems with the existing road drainage
23 conditions include, but are not limited to:
24

- 1 • Evidence of direct sediment entry into a watercourse or a flood prone area from
2 road surfaces or drainage structures and facilities (e.g., ponded sediment,
3 sediment deposits, delivery of turbid runoff from drainage structures during
4 rainfall events).
- 5 • Ditch scour or downcutting resulting from excessively long undrained ditches with
6 infrequent ditch drain (relief) culverts or other outlet structures or facilities. This
7 condition can also result from design inadequacies (e.g., spacing not altered for
8 steep ditch gradient), inadequate erosion prevention practices (e.g., lack of
9 armoring), or ditches located in areas of erodible soils.
- 10 • Gullies or other evidence of erosion on road surfaces or below the outlets of road
11 drainage facilities or structures, including ditch drain (relief) culverts, with
12 transport or a high likelihood of transport to a watercourse.

13
14 Additionally, if a road and/or ditch runoff is hydrologically connected to a watercourse,
15 the following factors elevate the risk of sediment delivery to a watercourse:
16

- 17 • Existing or high potential for cutbank sloughing or erosion into inside ditches.
- 18 • Native surfaced road exhibiting erosion.
- 19 • Native-surfaced road composed of erodible soil types (e.g., granitic soils).
- 20 • Rilled, gullied, or rutted road approaches to crossings.
- 21 • Existing ditch drain (relief) culverts or other road drainage structures with
22 significant plugging from sediment and/or small woody debris.
- 23 • Existing ditch drain (relief) culverts or other road drainage structures with
24 decreased capacity due to damage or impairment (e.g., crushed or bent inlets,
25 flattened dips due to road grading).

- Decreased structural integrity of ditch drain (relief) culverts, waterbreaks, or other road drainage structures (e.g., excessive pipe corrosion, breached waterbreaks, or rutted road segments).

C. Design and Treatment Measures to Achieve Hydrologic Disconnection

Treatment measures for existing logging roads are necessary where site-specific field observations indicate that key areas and problem indicators combine to result in significant existing or potential erosion sites. Proposed and reconstructed roads should be designed to achieve hydrologic disconnection to the extent feasible. Additional restrictions and requirements specified under 14 CCR § 923.4(a) [943.4(a), 963.4(a)] apply for new or reconstructed roads, while 14 CCR § 923.5(a) [943.5(a), 963.5(a)], and 923.6(g) and (h)(3) [943.6(g) and (h)(3), 963.6(g) and (h)(3)] apply to existing roads.

Measures to hydrologically disconnect logging road segments include, but are not limited to:

- Installation of a road drainage facility or structure as close as possible to the watercourse crossing. Typically, this distance is 30 to 100 feet above the crossing (Refer to Figure 2), but may be up to 200 feet or more based on road drainage design and site-specific conditions. For example, the distance from the watercourse crossing to the road drainage facility or structure might be based on the location of where the buffering capacity of the filter strip is the greatest (i.e., densest vegetation and ground cover). Note that this spacing may be closer than the maximum distance specified under 14 CCR § 923.5(f) [943.5(f), 963.5(f)], or as needed for conformance with 14 CCR § 923.5(g) [943.5(g), 963.5(g)].

1 Depending on the road drainage design, the road drainage facility or structure
2 can be a ditch drain (relief) culvert, rolling dip, waterbreak, or other effective
3 facility or structure. Surface drainage designs or facilities that concentrate runoff
4 (e.g., crowned or insloped road surfaces) require more buffering distance
5 between the drainage outlet and the watercourse than those that disperse runoff
6 (e.g., outsloped road surfaces).

- 7
8 • Installation of additional road drainage facilities or structures above (upgrade of)
9 the closest road drainage facility or structure to the watercourse crossing that are
10 appropriately sized and located in conformance with 14 CCR § 923.5(b) and (c)
11 [943.5(b) and (c), 963.5(b) and (c)]. Maximum waterbreak spacing for roads is
12 specified under 14 CCR § 923.5(f) [943.5(f), 963.5(f)]. Appropriate spacing for
13 rolling dips is considered in Section II.C. of this Technical Rule Addendum.
- 14
15 • Installation of ditch drains that are sufficiently spaced to minimize: ditch scour,
16 prevent exceedance of ditch drain hydraulic capacity, and erosion at drain
17 outlets. Local experience, knowledge and site specific conditions (e.g., soil and
18 geologic material present) should be considered by the RPF in the location and
19 spacing of ditch drains. Spacing of ditch drains should be adjusted in response
20 to: (1) poor filtering capacity or potentially unstable areas at the outlet (additional
21 factors are listed in the following section), and (2) proximity to a watercourse.
22 Near a watercourse, the ditch drain spacing should be closer so that smaller
23 amounts of flow are routed down the ditchline, thus providing an added factor of
24 safety for high flow conditions and potential failure of drainage facilities. An
25 example of ditch drain (relief) spacing guidelines is displayed in Table 1 (see

1 Section IV of this addendum). In the preparation of THPs, NTMPs, and PTHPs,
2 RPFs may develop and use other spacing guidelines that better match the field
3 conditions where their plans are proposed. For example, the RPF can observe
4 the length of road necessary to initiate significant rill erosion and use these
5 observations to adjust spacing guidelines to local conditions.

- 6
7 • In general, if ditch drain (relief) culverts are used, they are recommended to be at
8 least 18 inches in diameter to lower the potential for plugging from soil and small
9 woody debris.
- 10
11 • Elevation of the crossing slightly above the road grade to insure that the crossing
12 (e.g., bridges or relatively flat road approaches) does not serve as the low point
13 for road surface runoff (Refer to Figures 2 and 7). Where applicable, this does
14 not alleviate the necessity for installation of a critical dip to mitigate diversion
15 potential.
- 16
17 • Installation of outside berms to decrease hydrologic connectivity where they
18 direct flow to a more suitable discharge area.

19
20 Many road segments will have a small portion of their length still connected, even
21 following implementation of 14 CCR §§ 923.2(a)(5) [943.2(a)(5), 963.2(a)(5)], 923.5(a)
22 [943.5(a), 963.5(a)], and 923.6(g) and (h)(3) [943.6(g) and (h)(3), 963.6(g) and (h)(3)].
23 Additionally, treatment of road approaches for connected road segments next to
24 watercourses may be necessary pursuant to 14 CCR § 923.5(i) [943.5(i), 963.5(i)].
25

II. Road Drainage, Energy Dissipation, Outsloping and Rolling Dips

A. Location of Drainage Facilities and Structures

In addition to drainage structures and facilities being located: (1) to disconnect road drainage upslope of watercourses, and (2) at a sufficient interval (spacing) to avoid volume concentrations and associated erosion, as discussed above, there are additional factors that should be considered prior to placing drainage structures and facilities in the field. To assist in identifying sites best suited for a drainage structure or facility, the following criteria should be considered. These criteria should be evaluated and appropriately weighted based on site-specific conditions, so that the effectiveness of the drainage structure or facility is maximized and potential problems are avoided or minimized. RPFs should maintain or restore natural drainage patterns as much as possible, while considering the factors listed below. Drainage structures and facilities should be placed:

- To avoid the concentration of flow onto unstable or potentially unstable areas, such as known active landslides, hummocky ground, concave headwalls, or steep fillslopes.
- To discharge onto divergent (convex) to planar slopes where possible, to allow for better dispersion and infiltration (Refer to Figure 3).
- Before hydrologic divides to prevent water from one hydrologic basin mixing with, and potentially impacting, another hydrologic basin not conditioned to receiving the additional flows.

- Above breaks in the road grade that transition from low-gradient to high-gradient to remove the water off of the road before it gains velocity and erosive power on the downslope steep road segment.
- To drain localized or emergent groundwater, springs, and wet areas present in the road prism.

B. Installation of Energy Dissipators for Drainage Structures and Facilities

Where the natural topography, soil surface texture, and vegetation is inadequate to dissipate the energy of flowing water, energy dissipators (e.g., slash, rock armor, flow diverters, downspouts, etc.) should be placed at outfalls of drainage structures and facilities to disperse flows and promote infiltration, consistent with the requirements stated in 14 CCR § 923.5(h) [943.5(h), 963.5(h)]. The use and selection of an appropriate energy dissipator should be based on field conditions and is a function of flow, erosion characteristics of the soils, slope gradient, slope roughness and cover, and distance to a receiving watercourse. Effective energy dissipators commonly used in the forest setting, include, but are not limited to:

- Dense vegetative ground cover.
- Wood slash that is “packed” into place with heavy equipment (ideally) or by hand.
- Pit-run rock. Generally composed of competent local rock that has a range of rock sizes and is of sufficient size to resist movement from road runoff.
- Properly located, sized, and maintained stilling basins.

1 **C. Logging Road Outsloping and Installation of Rolling Dips**

2 Outsloped roads are built with a slight angle of the road surface towards the fill slope
3 (Refer to Figure 4). This configuration allows road surface runoff to drain in a dispersed
4 manner over the fillslope onto undisturbed forest soils. As defined in 14 CCR § 895.1,
5 outsloping means shaping the road surface to drain toward the outside edge of the
6 logging road or landing.

7
8 Rolling dips are typically constructed on outsloped roads to ensure adequate drainage
9 of the road surface. As defined in 14 CCR § 895.1, a rolling dip means a drainage
10 facility that is constructed to remain effective while allowing passage of motor vehicles
11 at reduced road speeds.

12
13 An outsloped road’s running surface is considered hydrologically disconnected as long
14 as runoff is effectively transported across rather than down the road surface, outside
15 berms do not restrict runoff, and the road prism does not encroach upon the
16 watercourse. Rolling dips should be installed on outsloped roads to ensure that surface
17 flow is routed off the road surface in situations where outsloping alone may not be
18 effective to prevent concentrating flow or eroding the fill (Refer to Figure 5). Outsloped
19 roads with rolling dips are typically not appropriate for roads with a gradient in excess of
20 ten percent (10%) because of the steepness of the dip approach grades that would be
21 required and the added difficulty to effectively drain the road surface. The maximum
22 amount of outsloping achievable depends on the type of traffic that will use the road
23 (e.g., lowboys, log trucks, pickup trucks), and the road surfacing. Outsloped roads are
24 not appropriate in all situations due to safety concerns, timing of use, or expected traffic
25 (e.g., winter use in snow zones).

1 The spacing of rolling dips must be in conformance with 14 CCR § 923.5(g) [943.5(g),
2 963.5(g)]. As with ditch drain (relief) culvert location, the location of rolling dips is to be
3 modified based on the site buffering capacity at proposed installation locations and
4 avoidance of concentrated flow onto unstable areas. Spacing of rolling dips is a
5 function of: (1) road grade, soil erodibility, and road surface area draining to the dip, and
6 (2) proximity to a watercourse. Near a watercourse, the rolling dip spacing should be
7 closer so that smaller amounts of flow are routed towards each dip, thus providing an
8 added factor of safety for high flow conditions and potential failure of drainage facilities.
9 Local experience and knowledge of soil and geologic material present should be
10 considered by the RPF in the location and spacing of rolling dips. An example of
11 general rolling dip spacing guidelines is displayed in Table 1. In the preparation of
12 THPs, NTMPs, and PTHPs, RPFs may develop and use other spacing guidelines that
13 better match the field conditions where their plans are proposed.

14 **III. Diversion Potential at Watercourse Crossings and Critical Dip Installation**

15 Diversion potential at watercourse crossings is typically associated with large storm
16 events, and can be a significant source of erosion and sediment. Watercourse
17 crossings have diversion potential if overflow at a plugged culvert inlet diverts the
18 watercourse down the road rather than over the crossing and back into the natural
19 watercourse channel. Diverted flows can create excessive erosion where the flows
20 erode non-channeled surfaces and where they exceed the channel capacity of non-
21 original channels. Diversion potential exists on roads that have a continuous climbing
22 grade across the crossing or where the road slopes downward away from the crossing
23 in at least one direction (Refer to Figure 6). Forest Practice Rules 14 CCR § 923.10(k)
24 [943.10(k), 963.10(k)] requires diversion potential on constructed (new) and existing
25

1 logging roads to be addressed; similar requirements have existed since 1990. As
2 specified in 14 CCR § 923.10(i) [943.10(i), 963.10(i)], critical dips are incorporated into
3 the construction or reconstruction of logging road watercourse crossings utilizing
4 culverts, except where diversion of overflow is addressed by other methods stated in
5 the plan. The critical dip should be constructed at the point where the potential for
6 erosion and the loss of fill is minimized (Refer to Figure 7).

7

8 **IV. Crossings with Higher Risk of Failure and Higher Risk to the Environment**

9 Some watercourse crossings have a higher relative risk of failure due to the landscape
10 in which they are installed (e.g., areas prone to debris flows or landsliding); or due to
11 seasonal lack of access or remoteness, both of which limit effective emergency
12 maintenance. Additionally, crossings that employ larger than typical fills to achieve
13 running surface elevations often present a higher risk to the environment if they fail due
14 to the large volumes of fill that could be introduced to downstream watercourses. In
15 these cases, it is recommended and/or required (Forest Practice Rule 14 CCR §
16 923.11(i) [943.11(i), 953.11 (i)] that such crossings be oversized, designed for low
17 maintenance, reinforced, or removed before the completion of timber operations. As
18 discussed in *Designing Watercourse Crossings for 100-year Flood Flows, Wood and*
19 *Sediment* (Cafferata et al., 2004), where temporary crossings are not used, rock ford or
20 rock armored fill crossings are often a better alternative to culverts on small to medium
21 sized watercourses in areas where winter maintenance is difficult or debris flows are
22 more likely; the same holds true in areas prone to earthflows or other types of
23 landsliding. Overall, fords (including native surface, rock, armored fill, and vented) are
24 more apt to effectively transport flows, sediment, and debris in unstable landscapes and
25 areas with poor access for emergency monitoring and repairs than culvert crossings.

1 Where culverts are used, and fills are large, Cafferata et al. (2004) recommend that the
2 diameter of the culvert be increased by 6 inches for every 5 feet of fill above the pipe on
3 the discharge side of the crossing. The additional culvert diameter reduces the risk of
4 failure by allowing more room for transport of flow, sediment and debris, and is relatively
5 inexpensive compared to the cost of replacement of a failed crossing. Crossings may
6 also be reinforced by utilizing large rock to line fill faces and by incorporating large
7 critical dips to allow flow passage if the culvert is plugged. Temporary crossings
8 typically provide the least environmental risk since flow is unimpeded after the crossings
9 are removed.

11 **V. Table and Figures**

12 The following table and figures are provided as examples to illustrate design concepts.

13 These are not intended to serve as default performance standards.

15 Table 1. An example of ditch-relief culvert and rolling dip spacing guidelines is found in the
16 University of California's Publication 8262, *Rural Roads: A Construction and Maintenance Guide*
17 for California Landowners (Kocher et al. 2006, adopted from Keller and Sherar 2003). Note that
spacing of rolling dips and ditch relief culverts should be a function of proximity to a
watercourse, with closer spacing near the channel.

| Road Grade (percent) | Soil Erodibility | |
|-------------------------|------------------------------|------------------|
| | Low to Non- erosive soils | Erosive soils |
| 0-3% | 400' | 250' |
| 4-6% | 300' | 160' |
| 7-9% | 250' | 130' |
| 10-12% | 200' | 115' |
| 12+ | 160' | 100' |

22 **Note:** (1) **Low Erosion Soils** = Coarse Rocky Soils, Gravel, and
Some Clay
23 (2) **High Erosion Soils** = Fine, Friable Soils, Silt, Fine
Sands

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25


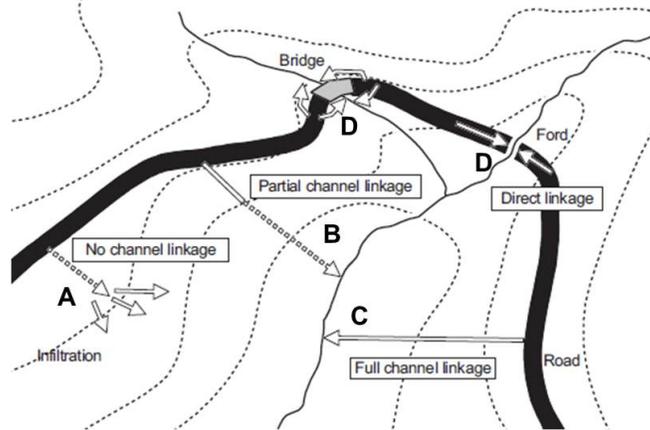



Figure 1. The range of hydrologic connectivity (i.e., linkage) for a road. Ideally, road runoff is drained to an effective filter strip where runoff and sediment is dispersed onto the forest floor (A). Roads can be partially connected when a portion of runoff and sediment reaches the watercourse (B). Full hydrologic connectivity can occur when road runoff initiates channels or gullies (C), or is drained directly into watercourses at road crossings (D). Figure adapted from Croke and Hairsine, 2006.

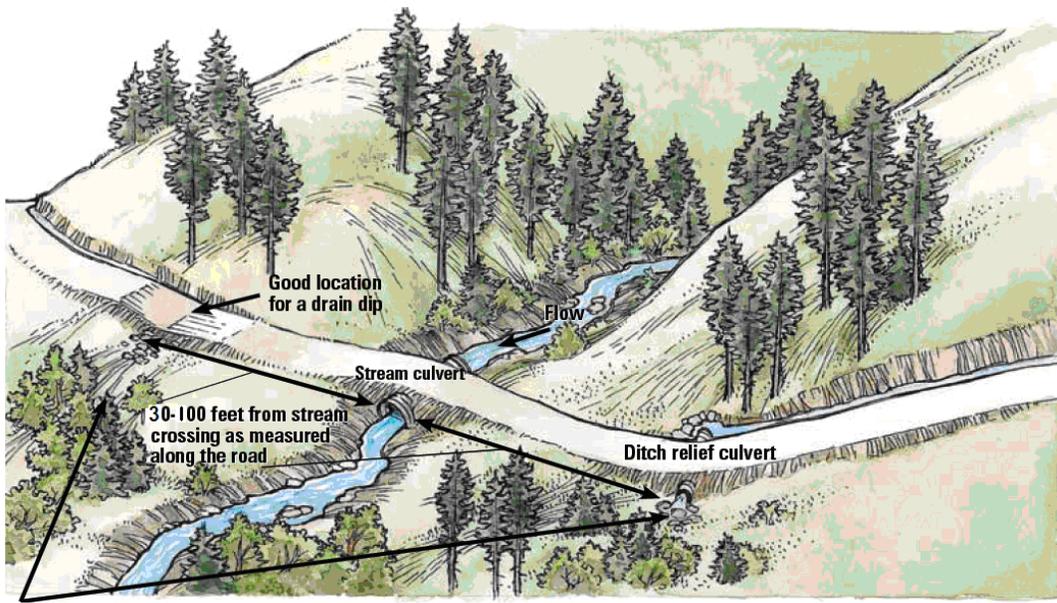


Ditch drainage should be directed into vegetation and undisturbed soil filter, and not allowed to continue flowing down the ditch and into the stream.

Figure 2. Diagram showing implementation of road drainage disconnection facilities/structures to limit sediment delivery into a watercourse. Note the absence of an apparent critical dip at the

1 crossing. (modified from Oregon Forest Resources Institute 2011, 2nd Ed., used with permission
2 (to be obtained)).

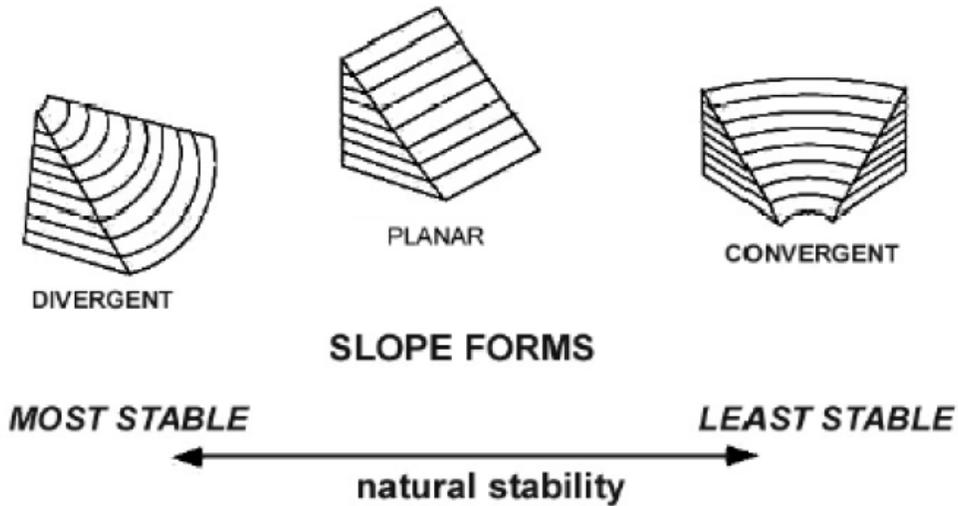

12 Figure 3. Three major slope forms; water should be discharged onto divergent (convex) to
13 planar slopes where possible (from WFPB 2004).

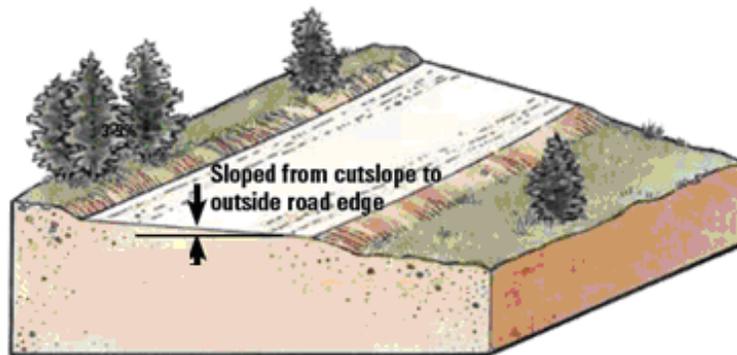

22 Figure 4. Diagram displaying a typical outsloped road (modified from Oregon Forest Resources
23 Institute 2011, 2nd Ed., used with permission (to be obtained).

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25

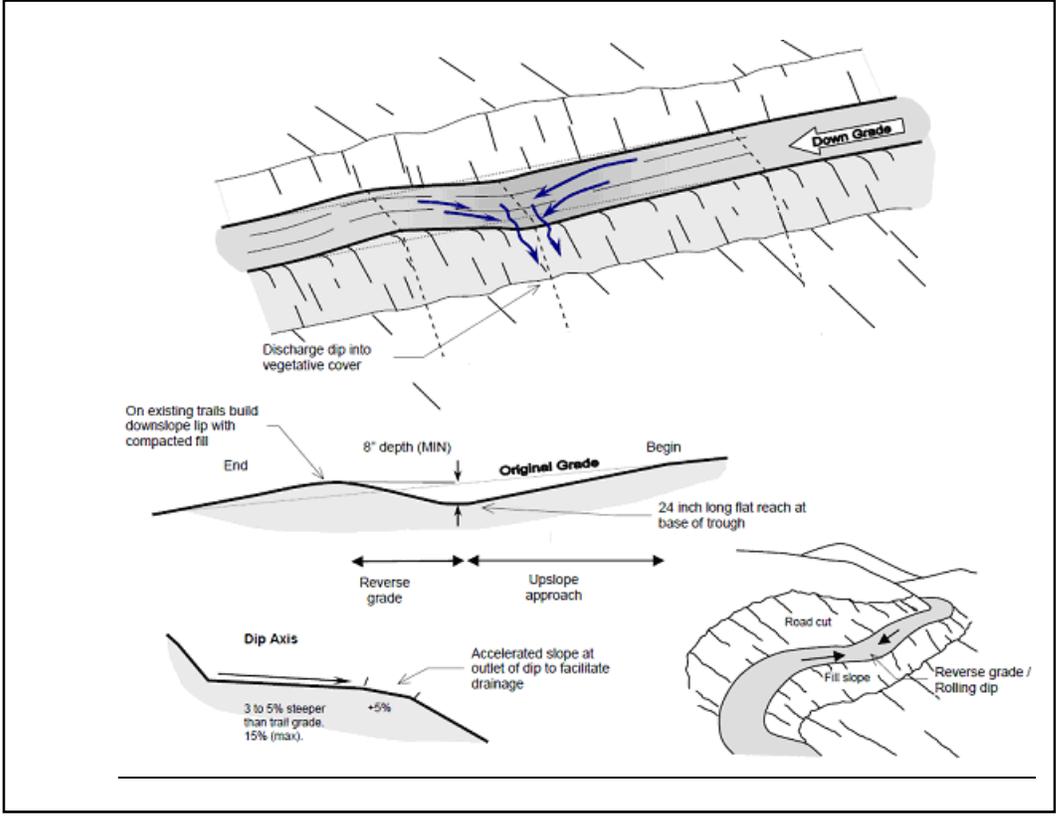


Figure 5. Example of rolling dip specifications (modified diagram provided by Tim Best, CEG).

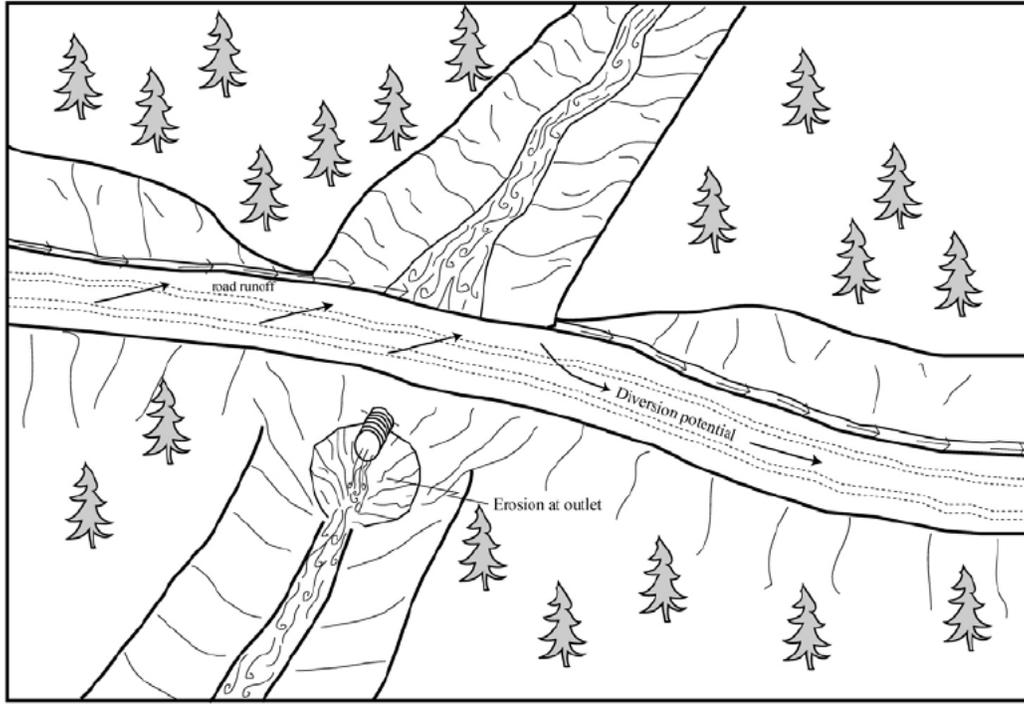


Figure 6. Diagram illustrating diversion potential at a watercourse crossing (from DFG 2006).

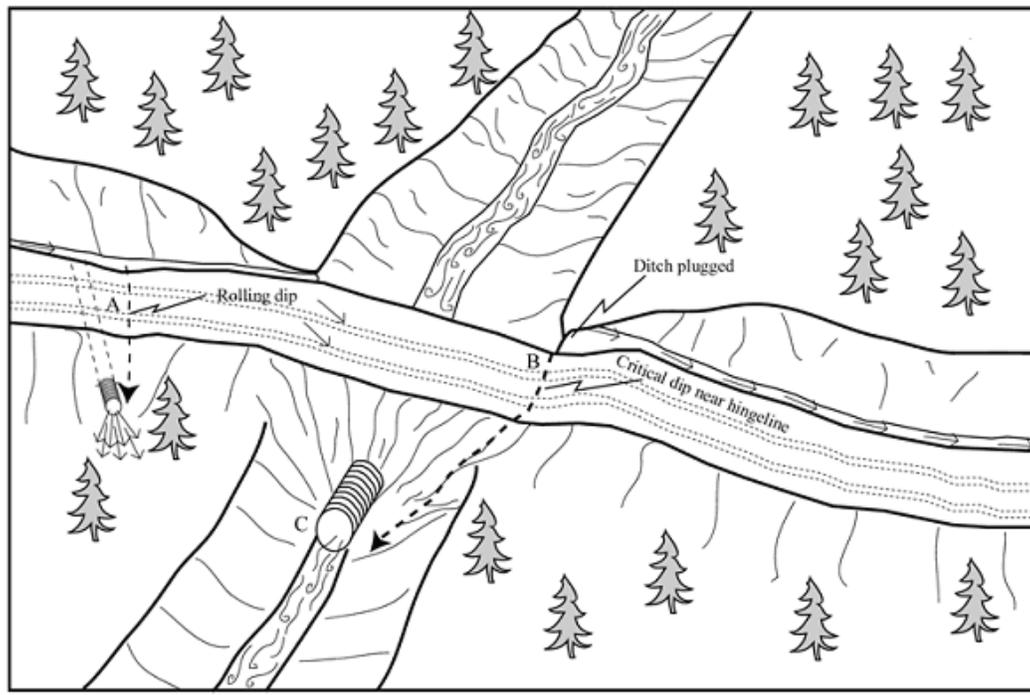


Figure 7. Illustration of a critical dip installed at a watercourse crossing to remove diversion potential (from DFG 2006). The critical dip should be constructed at the point where the potential for erosion and the loss of fill is minimized.